


CEAT

**THE ADVANTAGE THAT
FARMING DESERVES.**

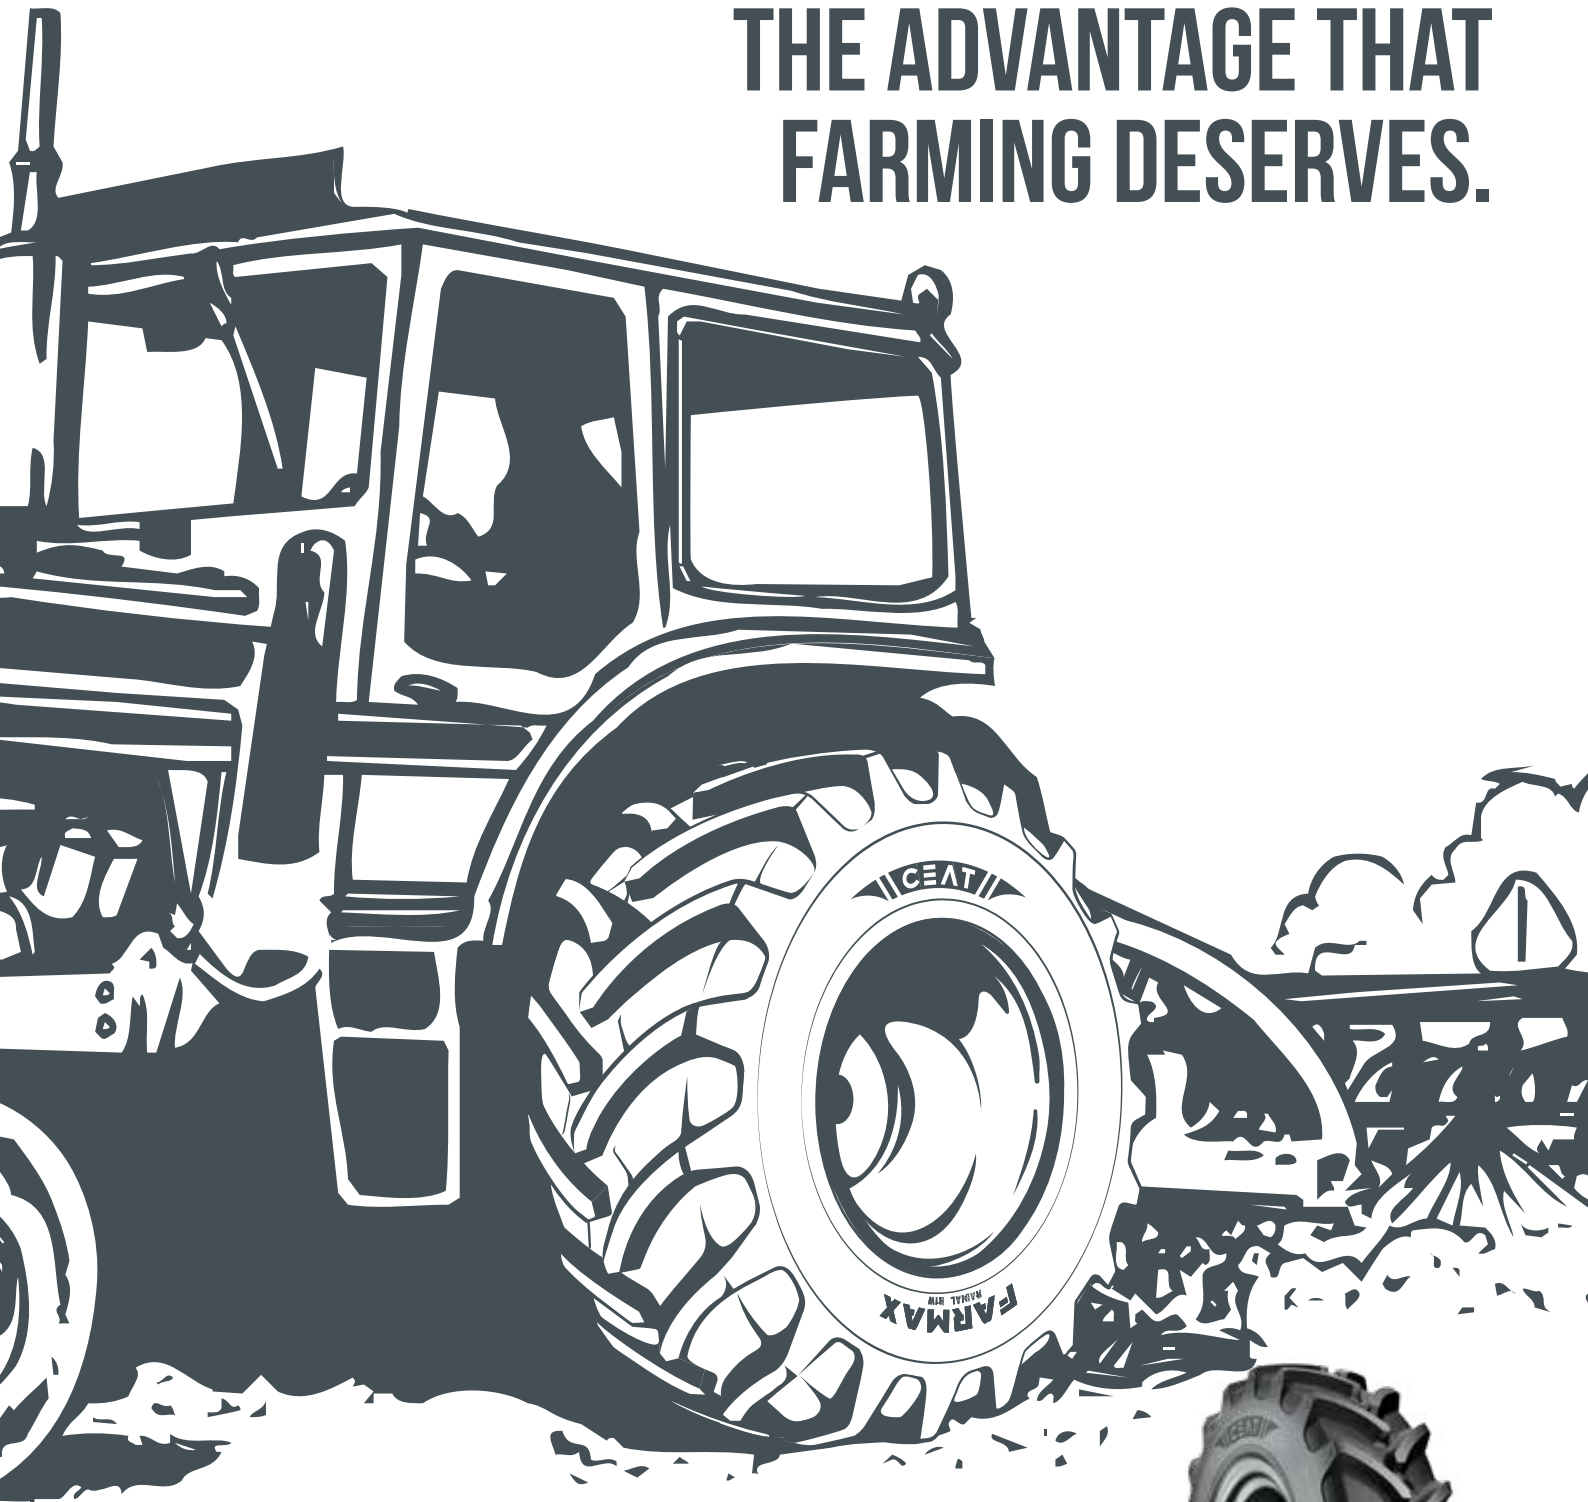

*Valid only for radial tires

COMPANY PROFILE

CEAT was established in 1924 in Turin, Italy. Today, we are one of India's leading tire manufacturers. The brand came to India in 1958, and later became part of the RPG Group. RPG is among the top business houses in India, with a group turnover of USD 3 billion.

CEAT Limited has earned the prestigious Deming Prize. The Deming Prize, founded in Japan, is one of the oldest and most prestigious quality awards in the world. With this recognition, CEAT became the first tire company in the world, outside of Japan, to have the honor of receiving this award. The Deming Prize recognizes companies that achieve business transformation by implementing Total Quality Management (TQM).

CEAT has been exporting tires since 1964, which has helped us in getting a firm foothold in the global market. Today CEAT tires are put in service in more than 115 countries around the world.

CEAT Specialty is CEAT's subsidiary for off-highway (OTR and Ag) tires in domestic and international markets, with a brand new plant focused on Ag radials.

Manufacturing facilities: Directly employing 5,000+ people across 7 plants in India and Sri Lanka, CEAT has a wide range of tires for all user segments. Our range includes tires for commercial segments like trucks, buses, light commercial vehicles as well as passenger cars, SUVs and two and three wheeler tires.

In the Specialty segment, CEAT manufactures farm, mining, earthmover, industrial, construction and special application off road tires.

CEAT Specialty Tires Inc., at Charlotte, NC, is the US subsidiary of CEAT Specialty.

Technology: A major commitment to research and development enables CEAT to remain at the technical forefront of the tire industry. The company is also equipped with state-of-the-art research, design and in-house testing facilities, which have helped the company in developing tires of the highest quality. With decades of expertise, today CEAT is capable of facing the challenging needs of customers around the world.

Market: CEAT enjoys a major market share in India where tires are exposed to extreme operating conditions. In India, CEAT is one of the largest suppliers to OEMs in all major categories.

GREENFIELD PLANT

Our new greenfield plant has a robust manufacturing capacity. Catering primarily to a global Ag radial & OTR market, the plant is spread across a 50-acre site. High-end equipment with a strong and experienced project team are the hallmarks of this plant. This new plant has automated machinery and is run by Self-Managed Teams.



INDEX

CATEGORY INDEX			
APPLICATION	RADIAL/BIAS	PATTERN NAME	PAGE NO.
TRACTOR	RADIAL	FARMAX R85	16-25
		FARMAX R80	26
		FARMAX R70	27-34
		FARMAX R90	34
		FARMAX R65	35-42
		TORQUEMAX	43-44
		FARMAX RC	45-50
	BIAS	FARMAX R1	52-54
		FARMAX F2	55-56
		FARMAX F2M	57-58
FLOTATION	RADIAL	FLOATMAX FT	60-61
	BIAS	FLOTATION T422	62-63
		T422 VALUE PRO	64-65
		TR800	66
		FLOTATION PLUS	67
		FLOTATION TX440	68
PIVOT IRRIGATION	BIAS	IRROGATOR	70
IMPLEMENT	BIAS	FARM IMPLEMENT I1	72-73
		FARM IMPLEMENT AWI305	74
		FARM IMPLEMENT 404	75
AGRO-INDUSTRIAL/ MULTI-USE	BIAS	LIFT PRO	78-79
		MPT 602	80-81
		MPT 800	82
SKIDSTEER	BIAS	LOADER PRO	84
		LOADER PRO HD	85
		GRIP X HD	86
TIRE CARE AND USAGE MANUAL			
GENERAL INFORMATION			88
TIRE DESCRIPTION AND NOMENCLATURE			89-90
LOAD INDEX AND SPEED SYMBOL			91-92
RMA CODE			93
CONVERSION TABLE			94
TIRE CARE AND MAINTENANCE GUIDELINES			95-101
WARRANTY POLICY FOR AG RADIALS			104-107
WARRANTY POLICY FOR AG BIAS			110-113
SKU CODE INDEX			115-121

Disclaimer:

- All tires conform to TRA & ETRTO standards.
- Images are for representative purposes only.
- Technical specifications are subject to change without prior notice.

TRACTOR



FARMAX R80/R85



FARMAX R70



FARMAX R65



TORQUEMAX



FARMAX RC



FARMAX R1

TRACTOR FRONT



FARMAX F2



FARMAX F2M

The images used are for representation purpose only



FLOTATION



FLOATMAX FT (RADIAL)



FLOTATION T422



T422 VALUE PRO



FLOTATION PLUS



TR800



FLOTATION TX440

PIVOT IRRIGATION



IRROGATOR



***IRROGATOR**

The images used are for representation purpose only
* Different Pattern



IMPLEMENT



FARM IMPLEMENT I1



FARM IMPLEMENT AWI305



FARM IMPLEMENT 404

AGRO INDUSTRIAL/ MULTIUSE



LIFT PRO



MPT 602



MPT 800

SKID STEER



LOADER PRO



LOADER PRO HD



GRIP X HD

The images used are for representation purpose only



RADIAL PATTERN INDEX

Rim Diameter	Tyre Size	Pattern	Page No.
20	250/85 R 20	FARMAX R85	17
	260/70 R 20	FARMAX R70	27
	280/85 R 20	FARMAX R85	17
	280/70 R 20	FARMAX R70	27
	300/70 R 20	FARMAX R70	27
	320/85 R 20	FARMAX R85	17
	320/70 R 20	FARMAX R70	27-28
	340/65 R 20	FARMAX R65	36
	360/70 R 20	FARMAX R70	28
	380/70 R 20	FARMAX R70	28
	420/65 R 20	FARMAX R65	36
	440/65 R 20	FARMAX R65	36
22.5	560/45 R 22.5	FLOATMAX FT	61
	560/60 R 22.5	FLOATMAX FT	61
	600/50 R 22.5	FLOATMAX FT	61
24	250/85 R 24	FARMAX R85	17
	280/85 R 24	FARMAX R85	17
	320/85 R 24	FARMAX R85	18
	320/70 R 24	FARMAX R70	29
	340/85 R 24	FARMAX R85	18
	360/70 R 24	FARMAX R70	29
	380/85 R 24	FARMAX R85	18
	380/70 R 24	FARMAX R70	29
	420/85 R 24	FARMAX R85	18
	420/70 R 24	FARMAX R70	29
	420/65 R 24	FARMAX R65	36
	440/65 R 24	FARMAX R65	36-37
	480/70 R 24	FARMAX R70	29
	480/65 R 24	FARMAX R65	37
	540/65 R 24	FARMAX R65	37
	460/70 R 24	LIFT PRO	79
26.5	600/55 R 26.5	FLOATMAX FT	61


Rim Diameter	Tyre Size	Pattern	Page No.
28	250/85 R 28	FARMAX R85	19
	280/85 R 28	FARMAX R85	19
	320/85 R 28	FARMAX R85	19
	320/70 R 28	FARMAX R70	30
	340/85 R 28	FARMAX R85	19
	360/70 R 28	FARMAX R70	30
	380/85 R 28	FARMAX R85	19
	380/70 R 28	FARMAX R70	30
	420/85 R 28	FARMAX R85	20
	420/70 R 28	FARMAX R70	30
	440/65 R 28	FARMAX R65	38
	480/70 R 28	FARMAX R70	30-31
	480/65 R 28	FARMAX R65	38
	540/65 R 28	FARMAX R65	38
30	600/70 R 28	FARMAX R70	31
	600/65 R 28	FARMAX R65	39
	380/85 R 30	FARMAX R85	20
	420/85 R 30	FARMAX R85	20
	420/70 R 30	FARMAX R70	31
	420/90 R 30	FARMAX R90	34
	460/85 R 30	FARMAX R85	20
	480/70 R 30	FARMAX R70	31
	520/70 R 30	FARMAX R70	32
	540/65 R 30	FARMAX R65	39
32	600/70 R 30	FARMAX R70	32
	600/65 R 30	FARMAX R65	39-40
	210/95 R 32	FARMAX RC	46
	230/95 R 32	FARMAX RC	46
	270/95 R 32	FARMAX RC	46
34	320/85 R 32	FARMAX R85	21
	320/85 R 34	FARMAX R85	21
	380/85 R 34	FARMAX R85	21
	420/85 R 34	FARMAX R85	21-22
	460/85 R 34	FARMAX R85	22
	480/70 R 34	FARMAX R70	32
	520/70 R 34	FARMAX R70	33
	540/65 R 34	FARMAX R65	40
	600/70 R 34	FARMAX R70	32
	600/65 R 34	FARMAX R65	40
	600/65 R 34	FARMAX R65	40



RADIAL PATTERN INDEX

Rim Diameter	Tyre Size	Pattern	Page No.
36	230/95 R 36	FARMAX RC	46
	270/95 R 36	FARMAX RC	46
	320/85 R 36	FARMAX R85	22
	340/85 R 36	FARMAX R85	22
38	270/95 R 38	FARMAX RC	47
	320/85 R 38	FARMAX R85	23
	340/85 R 38	FARMAX R85	23
	380/80 R 38	FARMAX R80	26
	420/85 R 38	FARMAX R85	23
	460/85 R 38	FARMAX R85	23-24
	480/70 R 38	FARMAX R70	33
	520/85 R 38	FARMAX R85	24
	520/70 R 38	FARMAX R70	33
	540/65 R 38	FARMAX R65	41
	580/70 R 38	FARMAX R70	33
	600/65 R 38	FARMAX R65	41
	650/65 R 38	FARMAX R65	41
	710/70 R 38	FARMAX R70	33-34
42	270/95 R 42	FARMAX RC	47
	320/80 R 42	FARMAX RC	47
	320/90 R 42	FARMAX RC	47-48
	480/80 R 42	FARMAX R80	26
	520/85 R 42	FARMAX R85	24
	650/65 R 42	FARMAX R65	42
	710/70 R 42	FARMAX R70	34

Rim Diameter	Tyre Size	Pattern	Page No.
44	230/95 R 44	FARMAX RC	48
	270/95 R 44	FARMAX RC	48
46	270/95 R 46	FARMAX RC	49
	300/95 R 46	FARMAX RC	49
	340/85 R 46	FARMAX RC	48
	380/90 R 46	FARMAX RC	49
	480/80 R 46	FARMAX R80	26
48	520/85 R 46	FARMAX R85	25
	230/95 R 48	FARMAX RC	50
	270/95 R 48	FARMAX RC	50
50	340/85 R 48	FARMAX RC	50
	480/80 R 50	TOURQUEMAX	44

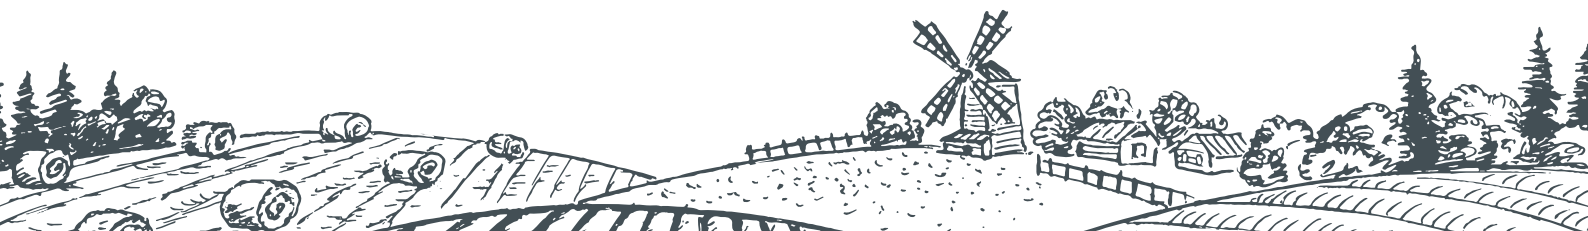

BIAS PATTERN INDEX

Rim Diameter	Tire Size	Pattern	Page No.	Pattern	Page No.	Pattern	Page No.
15	5.00-15	FARMAX F2	56	Farmax F2M	58		
	7.60-15	FARM IMPLEMENT I1	73				
	9.5L-15	FARM IMPLEMENT I1	73				
	11L-15	FARM IMPLEMENT I1	73				
	12.5L-15	FARM IMPLEMENT I1	73				
15.3	10.0/75-15.3	FARM IMPLEMENT AWI305	74				
	11.5/80-15.3	FARM IMPLEMENT AWI305	74				
15.5	400/60-15.5	TR800	66				
16	5.50-16	FARMAX F2	56	Farmax F2M	58		
	6.00-16	FARMAX F2	56				
	6.50-16	FARMAX F2	56				
	7.50-16	FARMAX F2	56				
	10.00-16	FARMAX F2	56				
	11.00-16	FARMAX F2	56				
16.5	10-16.5	LOADER PRO	84	GRIP X HD	86		
	12-16.5	LOADER PRO	84	GRIP X HD	86		
17	15/55-17	FARM IMPLEMENT 404	75	FARM IMPLEMENT 404	75	FLOTATION PLUS	67
	500/50-17	FLOTATION T422	63				
	480/45-17	FLOTATION PLUS	67				
17.5	14-17.5	LOADER PRO HD	85				
18	7.50-18	FARMAX F2	56				
	12.5-18	MPT 602	81				
19	4.00-19	FARMAX F2	56				
19.5	15-19.5	LOADER PRO HD	85				
20	7.50-20	FARMAX F2	56	MPT 800	82		
	10.00-20	MPT 602	81				
	12.5-20	MPT 602	81				
	405/70-20 (16.0/70-20)	MPT 602	81				
22.5	400/55-22.5	T422 VALUE PRO	65	T422 VALUE PRO	65	FLOTATION TX440	68
	500/45-22.5	T422 VALUE PRO	65				
	500/60-22.5	FLOTATION T422	63				
	550/45-22.5	FLOTATION T422	63			FLOTATION TX440	68
	550/60-22.5	FLOTATION T422	63				
	600/50-22.5	FLOTATION T422	63				
	600/55-22.5	FLOTATION T422	63			FLOTATION TX440	68
	700/40-22.5	FLOTATION T422	63				
	700/50-22.5	FLOTATION T422	63				



BIAS PATTERN INDEX

Rim Diameter	Tire Size	Pattern	Page No.	Pattern	Page No.	Pattern	Page No.
24	8.3-24	FARMAX R1	53	IRROGATOR	70		
	9.5-24	FARMAX R1	53				
	11.2-24	FARMAX R1	53				
	12.4-24	FARMAX R1	53				
	13.6-24	FARMAX R1	53	IRROGATOR	70		
	14.9-24	FARMAX R1	53				
	16.9-24	FARMAX R1	53				
	15.5/80-24	LIFT PRO	79	MPT 800	82		
	405/70-24 (16.0/70-24)	MPT 602	81				
26	18.4-26	FARMAX R1	53				
26.5	600/55-26.5	FLOTATION T422	63				
	700/50-26.5	FLOTATION T422	63				
	800/45-26.5	FLOTATION T422	63				
28	11.2-28	FARMAX R1	53				
	12.4-28	FARMAX R1	53				
	13.6-28	FARMAX R1	54				
	14.9-28	FARMAX R1	54				
	16.9-28	FARMAX R1	54				
30	16.9-30	FARMAX R1	54				
	18.4-30	FARMAX R1	54				
34	18.4-34	FARMAX R1	52				
36	13.6-36	FARMAX R1	52				
38	11.2-38	IRROGATOR	68				
	13.6-38	FARMAX R1	54				
	15.5-38	FARMAX R1	54				
	16.9-38	FARMAX R1	54				
	18.4-38	FARMAX R1	54				

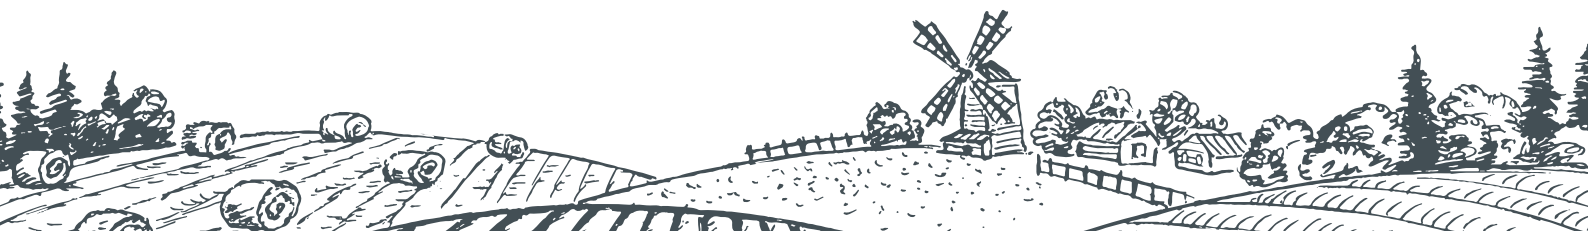


TABLE HEADER

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load		kg lbs	

LI- LOAD INDEX
SS- SPEED SYMBOL

SECTION WIDTH

OVERALL DIAMETER

STATIC LOADED RADIUS

ROLLING CIRCUMFERENCE

TIRE WEIGHT

NON-SKID DEPTH
(TREAD DEPTH)

INFLATION PRESSURE

SPEED INDICATION





TRACTOR RADIAL



85/80/70 SERIES AG RADIAL

WITH THE POWER OF CTR*

FEATURE

- Higher angle and lug overlap at center

BENEFIT

- Better roadability

FEATURE

- R1-W tread depth

BENEFIT

- Longer tire life



FEATURE

- Rounded shoulder

BENEFIT

- Reduced damage to soil and crop

FEATURE

- Lower angle at shoulder

BENEFIT

- Superior traction

FEATURE

- Wider tread
- Larger inner volume

BENEFIT

- Reduced soil compaction

*CTR: Low Compaction, High Traction, High Roadability



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi

FARMAX R 85

R 20										1.8 26	1590 3500	1300 2860	1130 2860	1060 2330	1060 2330
250/85 R 20	116 A8/B	W8 W7 W9	250 9.84	933 36.73	424 16.71	2755 108.5	37 47	33 72.7	2 29	1700 3740	1390 3060	1390 3060	1130 2490	1130 2490	
									2.2 32	1790 3940	1460 3220	1460 3220	1190 2620	1190 2620	
									2.4 35	1880 4140	1540 3390	1540 3390	1250 2750	1250 2750	
280/85 R 20 (11.2 R 20)	112 A8/B	W10 W9	285 11.2	984 38.7	447 17.6	2914 114.7	40 51	39 85	0.8 12	1130 2490	920 2030	800 1760	750 1650	750 1650	
									1 15	1280 2820	1050 2310	910 2000	850 1870	850 1870	
									1.3 19	1490 3280	1220 2690	1060 2330	990 2180	990 2180	
									1.6 23	1680 3700	1380 3040	1200 2640	1120 2470	1120 2470	
320/85 R 20 (12.4 R 20)	119 A8/B	W10 W11 W9	320 12.6	1052 41.4	474 18.7	3102 122.1	41 52	47 103	0.8 12	1370 3020	1120 2470	970 2140	910 2000	910 2000	
									1 15	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270	
									1.3 19	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640	
									1.6 23	2040 4490	1670 3680	1460 3220	1360 3000	1360 3000	
R 24															
250/85 R 24 (9.5 R 24)	109 A8/B	W8 W7 W9	250 9.8	1036 40.8	477 18.8	3097 121.9	37 47	39 86	0.8 12	1040 2290	850 1870	740 1630	690 1520	690 1520	
									1 15	1170 2580	960 2110	830 1830	780 1720	780 1720	
									1.3 19	1370 3020	1120 2470	970 2140	910 2000	910 2000	
									1.6 23	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270	
280/85 R 24 (11.2 R 24)	115 A8/B	W10 W9	285 11.2	1086 42.8	498 19.6	3235 127.4	40 51	44 96	0.8 12	1220 2690	1000 2200	870 1920	810 1780	810 1780	
									1 15	1380 3040	1130 2490	980 2160	920 2030	920 2030	
									1.3 19	1620 3570	1330 2930	1160 2560	1080 2380	1080 2380	
									1.6 23	1820 4010	1490 3280	1300 2860	1215 2680	1215 2680	

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs		
320/85 R 24 (12.4 R 24)	122 A8/B	W11 W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	43 54	53 116	0.8 12	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
									1 15	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510
									1.3 19	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
									1.6 23	2250 4960	1850 4070	1610 3550	1500 3300	1500 3300
320/85 R 24 (12.4 R 24)	142 A8/B	W11 W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	40.5 51	60.5 133	3 44	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780
									3.4 49	3510 7730	2880 6340	2500 5510	2340 5150	2340 5150
									3.8 55	3750 8260	3080 6780	2680 5900	2500 5510	2500 5510
									4.2 61	3980 8770	3260 7180	2840 6260	2650 5840	2650 5840
340/85 R 24 (13.6 R 24)	125 A8/B	W12 W11	355 14	1188 46.8	542 21.3	3528 138.9	43 54	62 136	0.8 12	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
									1 15	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750
									1.3 19	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220
									1.6 23	2480 5460	2030 4470	1770 3900	1650 3630	1650 3630
380/85 R 24 (14.9 R 24)	131 A8/B	W12 W13 W11	385 15.2	1260 49.6	571 22.5	3728 146.8	45 57	75 164	0.8 12	1950 4300	1600 3520	1390 3060	1300 2860	1300 2860
									1 15	2220 4890	1820 4010	1580 3480	1480 3260	1480 3260
									1.3 19	2600 5730	2130 4690	1850 4070	1730 3810	1730 3810
									1.6 23	2930 6450	2400 5290	2090 4600	1950 4300	1950 4300
420/85 R 24 (16.9 R 24)	137 A8/B	W15L W14L W13	450 17.7	1324 52.1	597 23.5	3906 153.8	48 61	92 202	0.8 12	2300 5070	1880 4140	1640 3610	1530 3370	1530 3370
									1 15	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850
									1.3 19	3060 6740	2510 5530	2180 4800	2040 4490	2040 4490
									1.6 23	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs		

R 28										0.8 12	1130 2490	920 2030	800 1760	750 1650	750 1650
250/85 R 28	112 A8/B	W8 W7 W9	250 9.84	1137 44.76	526 20.72	3340 131.5	37 47	43 94.8		1 15	1280 2820	1050 2310	910 2000	850 1870	850 1870
										1.3 10	1490 3280	1220 2690	1060 2330	990 2180	990 2180
										1.6 23	1680 3700	1380 3040	1200 2640	1120 2470	1120 2470
280/85 R 28 (11.2 R 28)	118 A8/B	W10 W9	285 11.2	1187 46.7	548 21.6	3553 139.9	40 51	49 107		0.8 12	1320 2910	1080 2380	940 2070	880 1940	880 1940
										1 15	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
										1.3 19	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580
										1.6 23	1980 4360	1620 3570	1410 3110	1320 2910	1320 2910
320/85 R 28 (12.4 R 28)	124 A8/B	W11 W10 W9	330 13.0	1255 49.4	574 22.6	3698 145.6	40.5 51	52.5 115.7		0.8 12	1610 3550	1320 2910	1140 2510	1070 2360	1070 2360
										1 15	1830 4030	1500 3300	1310 2890	1220 2690	1220 2690
										1.3 19	2130 4690	1750 3850	1520 3350	1420 3130	1420 3130
										1.6 23	2400 5290	1970 4340	1710 3770	1600 3520	1600 3520
340/85 R 28 (13.6 R 28)	127 A8/B	W12 W11	355 14	1289 50.7	592 23.3	3846 151.4	43 54	67 148		0.8 12	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580
										1 15	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
										1.3 19	2330 5130	1910 4210	1660 3660	1550 3410	1550 3410
										1.6 23	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850
380/85 R 28 (14.9 R 28)	133 A8/B	W12 W13 W11	390 15.4	1357 53.4	620 24.4	4035 158.9	45 57	82 181		0.8 12	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
										1 15	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
										1.3 19	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
										1.6 23	3090 6810	2530 5570	2200 4850	2060 4540	2060 4540

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph		
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						Maximum Load		kg lbs		
420/85 R 28 (16.9 R 28)	139 A8/B	W15L W14L W13	450 17.7	1425 56.1	648 25.5	4224 166.3	48 61	101 222	0.8 12	2430 5350	1990 4380	1730 3810	1620 3570	1620 3570
									1 15	2780 6120	2280 5020	1980 4360	1850 4070	1850 4070
									1.3 19	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740
									1.6 23	3650 8040	2990 6590	2600 5730	2430 5350	2430 5350
380/85 R 30 (14.9 R 30)	135 A8/B	W12 W13 W11	385 15.2	1408 55.4	646 25.4	4195 165.2	45 57	87 192	0.8 12	2180 4800	1780 3920	1550 3410	1450 3190	1450 3190
									1 15	2490 5480	2040 4490	1780 3920	1660 3660	1660 3660
									1.3 19	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
									1.6 23	3270 7200	2680 5900	2330 5130	2180 4800	2180 4800
420/85 R 30 (16.9 R 30)	140 A8/B	W15L W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	48 61	106 234	0.8 12	2510 5530	2050 4520	1790 3940	1670 3680	1670 3680
									1 15	2850 6280	2340 5150	2030 4470	1900 4190	1900 4190
									1.3 19	3320 7310	2720 5990	2360 5200	2210 4870	2210 4870
									1.6 23	3750 8260	3080 6780	2680 5900	2500 5510	2500 5510
420/85 R 30 (16.9 R 30)	147 A8/B	W15L W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	48 61	106 233.7	1.8 26	3900 8590	3200 7050	2780 6120	2600 5730	2600 5730
									2 29	4140 9120	3390 7470	6120 2950	2760 6080	2760 6080
									2.2 32	4380 9650	3590 7910	6500 3120	2920 6430	2920 6430
									2.4 35	4610 10150	3780 8330	3290 7250	3075 6770	3075 6780
460/85 R 30 (18.4 R 30)	145 A8/B	W16L W15L W14L	480 18.9	1544 60.8	701 27.6	4574 180.1	50 63	126 278	0.8 12	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
									1 15	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
									1.3 19	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
									1.6 23	4350 9580	3570 7860	3100 6830	2900 6390	2900 6390

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						bar psi	Maximum Load		kg lbs	

R 32	320/85 R 32 (12.4 R 32)	126 A8/B	W11 W10 W9	325 12.8	1357 53.4	627 24.7	4062 159.9	40.7 51	65 143.3	0.8 12	1700 3740	1390 3060	1210 2670	1130 2490	1130 2490
										1 15	1940 4270	1590 3500	1380 3040	1290 2840	1290 2840
										1.3 19	2270 5000	1860 4100	1620 3570	1510 3330	1510 3330
										1.6 23	2550 5620	2090 4600	1820 4010	1700 3740	1700 3740
	320/85 R 32 (12.4 R 32)	142 A8/B	W11 W10 W9	325 12.8	1357 53.4	627 24.7	4062 160	41 51	65 143	3 44	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930
										3.4 49	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
										3.8 55	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
										4 58	3980 8770	3260 7180	2840 6260	2650 5840	2650 5840
R 34	320/85 R 34 (12.4 R 34)	141 A8/B	W11 W10 W9	325 12.8	1408 55.4	650 25.6	4222 166.2	40.7 51	80 176.3	2.8 41	3330 7330	2730 6010	2380 5240	2220 4890	2220 4890
										3.2 46	3600 7930	2950 6500	2570 5660	2400 5290	2400 5290
										3.6 52	3860 8500	3170 6980	2760 6080	2575 5670	2580 5680
										0.8 12	2300 5070	1880 4140	1640 3610	1530 3370	1530 3370
	380/85 R 34 (14.9 R 34)	137 A8/B	W12 W13 W11	385 15.2	1510 59.4	697 27.4	4516 177.8	45 56	100 221	1 15	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850
										1.3 19	3060 6740	2510 5530	2180 4800	2040 4490	2040 4490
										1.6 23	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070
										0.8 12	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900
	420/85 R 34 (16.9 R 34)	142 A8/B	W15L W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	48 61	113 249	1 15	3020 6650	2470 5440	2150 4740	2010 4430	2010 4430
										1.3 19	3530 7780	2890 6370	2510 5530	2350 5180	2350 5180
										1.6 23	3980 8770	3260 7180	2840 6260	2650 5840	2650 5840

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						Maximum Load	kg lbs			
420/85 R 34 (16.9 R 34)	147 A8/B	W15L W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	48 60	126 277	1.3 19	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740
									1.6 23	3650 8040	2990 6590	2600 5730	2430 5350	2430 5350
									2 29	4140 9120	3390 7470	2950 6500	2760 6080	2760 6080
									2.4 35	4610 10150	3780 8330	3290 7250	3075 6770	3075 6770
460/85 R 34 (18.4 R 34)	147 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	50 62	138 304	0.8 12	3080 6780	2520 5550	2190 4820	2050 4520	2050 4520
									1 15	3510 7730	2880 6340	2500 5510	2340 5150	2340 5150
									1.3 19	4080 8990	3350 7380	2910 6410	2720 5990	2720 5990
									1.6 23	4610 10150	3780 8330	3290 7250	3075 6770	3075 6770
460/85 R 34 (18.4 R 34)	157 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	50 62	146 322	2 29	4880 10750	4000 8810	3480 7670	3250 7160	3250 7160
									2.3 33	5300 11670	4340 9560	3780 8330	3530 7780	3530 7780
									2.6 38	5690 12530	4660 10260	4060 8940	3790 8350	3790 8350
									3 44	6190 13630	5070 11170	4410 9710	4125 9090	4125 9090
320/85 R 36 (12.4 R 36)	128 A8/B	W11 W10 W9	325 12.8	1458 57.4	677 26.7	4380 172.4	41 51	71 155	0.8 12	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640
									1 15	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
									1.3 19	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
									1.6 23	2700 5950	2210 4870	1930 4250	1800 3960	1800 3960
340/85 R 36 (13.6 R 36)	132 A8/B	W12 W11	355 14	1492 58.7	694 27.3	4485 176.6	43 54	85 187	0.8 12	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
									1 15	2280 5020	1870 4120	1630 3590	1520 3350	1520 3350
									1.3 19	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900
									1.6 23	3000 6610	2460 5420	2140 4710	2000 4410	2000 4410

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs		

R 38	320/85 R 38 (12.4 R 38)	143 A8/B	W11 W10 W9	325 12.8	1510 59.4	703 27.7	4543 178.9	40.5 51	87 191.8	2.4 35	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740
										2.8 41	3530 7780	2890 6370	2510 5530	2350 5180	2350 5180
										3.2 46	3810 8390	3120 6870	2720 5990	2540 5590	2540 5590
										3.6 52	4090 9010	3350 7380	2920 6430	2725 6000	2725 6000
	340/85 R 38 (13.6 R 38)	133 A8/B	W12 W11	355 14	1543 60.7	719 28.3	4645 182.9	43 54	87.5 192.9	0.8 12	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
										1 15	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
										1.3 19	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
										1.6 23	3090 6810	2530 5570	2200 4850	2060 4540	2060 4540
	340/85 R 38 (13.6 R 38)	148 A8/B	W12 W11	355 14	1543 60.7	719 28.3	4645 182.9	43 54	100 220	3 44	4010 8830	3280 7220	2860 6300	2670 5880	2670 5880
										3.4 49	4310 9490	3530 7780	3070 6760	2870 6320	2870 6320
										3.8 55	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
										4 58	4730 10420	3870 8520	3370 7420	3150 6940	3150 6940
	420/85 R 38 (16.9 R 38)	144 A8/B	W15L W14L W13	450 17.7	1680 66.1	775 30.5	5026 197.9	48 61	127 280	0.8 12	2810 6190	2300 5070	2000 4410	1870 4120	1870 4120
										1 15	3200 7050	2620 5770	2280 5020	2130 4690	2130 4690
										1.3 19	3720 8190	3050 6720	2650 5840	2480 5460	2480 5460
										1.6 23	4200 9250	3440 7580	3000 6610	2800 6170	2800 6170
	460/85 R 38 (18.4 R 38)	149 A8/B	W16L W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	50 63	146 322	0.8 12	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780
										1 15	3710 8170	3040 6700	2640 5810	2470 5440	2470 5440
										1.3 19	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
										1.6 23	4880 10750	4000 8810	3480 7670	3250 7160	3250 7160

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs		
460/85 R 38 (18.4 R 38)	167 A8/B	W16L W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	50 63	168 370	2 29	5160 11370	4230 9320	3680 8110	3440 7580	3440 7580
									3 44	6540 14410	5360 11810	4670 10290	4360 9600	4360 9600
									4 58	7730 17030	6330 13940	5510 12140	5150 11340	5150 11340
									4.4 64	8180 18020	6700 14760	5830 12840	5450 12000	5450 12000
520/85 R 38 (20.8 R 38)	155 A8/B	DW16L DW18L	530 20.9	1855 73	847 33.3	5513 217.1	54 63	191 422	0.8 12	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680
									1 15	4410 9710	3620 7970	3150 6940	2940 6480	2940 6480
									1.3 19	5150 11340	4220 9300	3670 8080	3430 7560	3430 7560
									1.6 23	5810 12800	4770 10510	4150 9140	3875 8540	3875 8540
520/85 R 38 (20.8 R 38)	169 A8/B	DW16 DW18L	530 20.9	1855 73	847 33.3	5513 217.1	54 63	211 466	2.4 35	6860 15110	5620 12380	4890 10770	4570 10070	4570 10070
									2.8 41	7500 16520	6150 13550	5350 11780	5000 11010	5000 11010
									3.2 46	8120 17890	6650 14650	5790 12750	5410 11920	5410 11920
									3.6 52	8700 19160	7130 15700	6210 13680	5800 12780	5800 12780
520/85 R 42 (20.8 R 42)	157 A8/B	DW16L DW18L	530 20.9	1951 76.8	889 35	5791 228	53 67	206 455	0.8 12	4130 9100	3380 7440	2940 6480	2750 6060	2750 6060
									1 15	4700 10350	3850 8480	3350 7380	3130 6890	3130 6890
									1.3 19	5480 12070	4490 9890	3910 8610	3650 8040	3650 8040
									1.6 23	6190 13630	5070 11170	4410 9710	4125 9090	4125 9090
520/85 R 42 (20.8 R 42)	169 A8/B	DW16L DW18L	530 20.9	1951 76.8	889 35	5791 228	53 67	227 500	1 15	4250 9360	3480 7670	3030 6670	2830 6230	2830 6230
									2 29	6380 14050	5230 11520	4550 10020	4250 9360	4250 9360
									2.8 41	7770 17110	6370 14030	5540 12200	5180 11410	5180 11410
									3.4 49	8700 19160	7130 15700	6210 13680	5800 12780	5800 12780

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10	20	30	40	50
			mm in	mm in						6	12	19	25	31
									bar psi	Maximum Load		kg lbs		

R 46	520/85 R 46 (20.8 R 46)	158 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	53 67	223 491	0.8 12	4250 9360	3480 7670	3030 6670	2830 6230	2830 6230
										1 15	4850 10680	3970 8740	3460 7620	3230 7110	3230 7110
										1.3 19	5640 12420	4620 10180	4020 8850	3760 8280	3760 8280
										1.6 23	6380 14050	5230 11520	4550 10020	4250 9360	4250 9360
520/85 R 46 (20.8 R 46)	174 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	53 67	245 540	2.4 35	7460 16430	6110 13460	5320 11720	4970 10950	4970 10950	
									2.8 41	8160 17970	6690 14740	5820 12820	5440 11980	5440 11980	
									3.2 46	8820 19430	7230 15930	6290 13850	5880 12950	5880 12950	
									4 58	10050 22140	8240 18150	7170 15790	6700 14760	6700 14760	

These are tubeless tires




Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi

FARMAX R 80

R 38	380/80 R 38	142 A8/B	W11 W12 W13	380 15	1573 61.9	731 28.8	4728 186.2	45 56	99 218	1 15	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
										1.6 23	3140 6920	2570 5660	2240 4930	2090 4600	2090 4600
										2 29	3570 7860	2930 6450	2550 5620	2380 5240	2380 5240
										2.4 35	3980 8770	3260 7180	2840 6260	2650 5840	2650 5840
	380/80 R 38	152 A8/B	W11 W12 W13	380 15	1573 61.9	757 29.8	4793 188.7	44.5 56	109 240	2.8 41	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
										3 44	4500 9910	3690 8130	3210 7070	3000 6610	3000 6610
										3.2 46	4680 10310	3840 8460	3340 7360	3120 6870	3120 6870
										3.5 52	5010 11040	4110 9050	3570 7860	3340 7360	3340 7360
										4.0 58	5330 11740	4370 9630	3800 8370	3550 7820	3550 7820
R 42	480/80 R 42 (18.4 R 42)	151 A8/B	DW16L	485 19.1	1835 72.2	848 33.4	5472 216.3	52 66	176 387	0.8 12	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070
										1 15	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770
										1.3 19	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
										1.6 23	5180 11410	4240 9340	3690 8130	3450 7600	3450 7600
R 46	480/80 R 46 (18.4 R 46)	158 A8/B	DW16L	485 19.1	1940 76.4	900 35.4	5800 228.3	52 66	189 417	1.3 19	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540
										1.6 23	5030 11080	4120 9070	3580 7890	3350 7380	3350 7380
										2 29	5730 12620	4700 10350	4090 9010	3820 8410	3820 8410
										2.4 35	6380 14050	5230 11520	4550 10020	4250 9360	4250 9360

These are tubeless tires

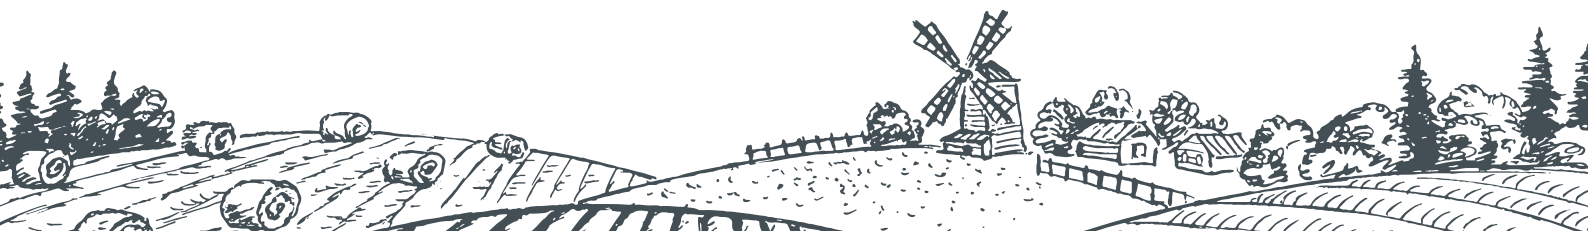

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load			kg lbs	

FARMAX R 70

R 20


260/70 R 20	113 A8/B	W9 W8	260 10.2	872 34.3	401 15.8	2605 102.6	30 38	26 58	1.2 17	1160 2560	950 2090	820 1810	770 1700	770 1700
									1.6 23	1370 3020	1120 2470	970 2140	910 2000	910 2000
									2 29	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270
									2.4 35	1730 3810	1410 3110	1230 2710	1150 2530	1150 2530
280/70 R 20	116 A8/B	W10 W9	290 11.4	900 35.4	413 16.3	2682 105.6	32 40	32 70	1.2 17	1250 2750	1020 2250	890 1960	830 1830	830 1830
									1.6 23	1490 3280	1220 2690	1060 2330	990 2180	990 2180
									2 29	1680 3700	1380 3040	1200 2640	1120 2470	1120 2470
									2.4 35	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750
300/70 R 20	110 A8/B	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	33 41	37 81	0.8 12	1070 2360	870 1920	760 1670	710 1560	710 1560
									1 15	1220 2690	1000 2200	870 1920	810 1780	810 1780
									1.3 19	1410 3110	1160 2560	1010 2220	940 2070	940 2070
									1.6 23	1590 3500	1300 2860	1130 2490	1060 2330	1060 2330
300/70 R 20	120 A8/B	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	33 41	39 86	1.3 19	1470 3240	1210 2670	1050 2310	980 2160	980 2160
									1.6 23	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
									2 29	1890 4160	1550 3410	1350 2970	1260 2780	1260 2780
									2.4 35	2100 4630	1720 3790	1500 3300	1400 3080	1400 3080
320/70 R 20	113 A8/B	W9 W10 W11	320 12.6	982 38.7	446 17.6	2909 114.5	40 51	44 97	0.8 12	1160 2560	950 2090	820 1810	770 1700	770 1700
									1 15	1310 2890	1070 2360	930 2050	870 1920	870 1920
									1.3 19	1530 3370	1250 2750	1090 2400	1020 2250	1020 2250
									1.6 23	1730 3810	1410 3110	1230 2710	1150 2530	1150 2530

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi
320/70 R 20	123 A8/B	W9 W10 W11	320 12.6	982 38.7	446 17.6	2909 114.5	40 51	48 106	1.3 19	1620 3570	1330 2930	1160 2560	1080 2380	1080 2380
									1.6 23	1830 4030	1500 3300	1310 2890	1220 2690	1220 2690
									2 29	2090 4600	1710 3770	1490 3280	1390 3060	1390 3060
									2.4 35	2330 5130	1910 4210	1660 3660	1550 3410	1550 3410
360/70 R 20	120 A8/B	W12 W11 W10	360 14.2	1042 41	470 18.5	3075 121	41 51	54 118	0.8 12	1400 3080	1140 2510	1000 2200	930 2050	930 2050
									1 15	1590 3500	1300 2860	1130 2490	1060 2330	1060 2330
									1.3 19	1860 4100	1530 3370	1330 2930	1240 2730	1240 2730
									1.6 23	2100 4630	1720 3790	1500 3300	1400 3080	1400 3080
360/70 R 20	129 A8/B	W12 W11 W10	360 14.2	1042 41	470 18.5	3075 121	41 51	58 127	1.3 19	1940 4270	1590 3500	1380 3040	1290 2840	1290 2840
									1.6 23	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220
									2 29	2490 5480	2040 4490	1780 3920	1660 3660	1660 3660
									2.4 35	2780 6120	2280 5020	1980 4360	1850 4070	1850 4070
380/70 R 20	122 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	42 53	58 128	0.8 12	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
									1 15	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510
									1.3 19	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
									1.6 23	2250 4960	1850 4070	1610 3550	1500 3300	1500 3300
380/70 R 20	132 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	42 53	62 137	1.3 19	2100 4630	1720 3790	1500 3300	1400 3080	1400 3080
									1.6 23	2370 5220	1940 4270	1690 3720	1580 3480	1580 3480
									2 29	2700 5950	2210 4870	1930 4250	1800 3960	1800 3960
									2.4 35	3000 6610	2460 5420	2140 4710	2000 4410	2000 4410

These are tubeless tires

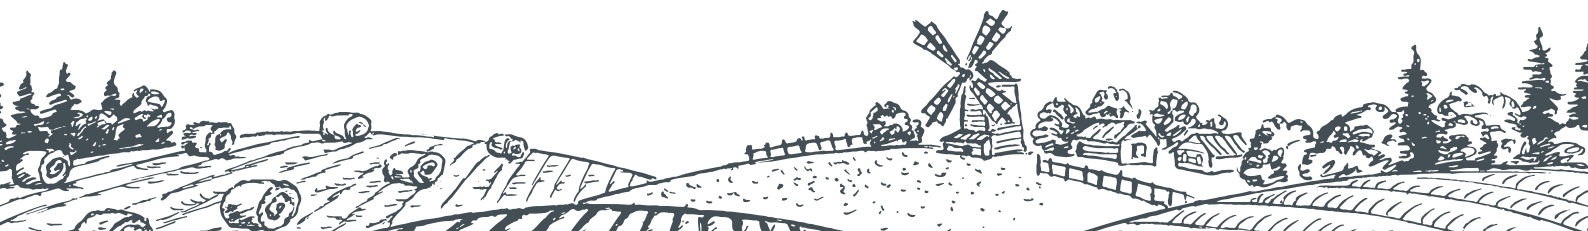

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi

R 24	320/70 R 24	116 A8/B	W9 W10 W11	320 12.6	1095 43.1	501 19.7	3260 128.4	40 51	51 111	0.8 12	1250 2750	1020 2250	890 1960	830 1830	830 1830
										1 15	1430 3150	1170 2580	1020 2250	950 2090	950 2090
										1.3 19	1670 3680	1370 3020	1190 2620	1110 2440	1110 2440
										1.6 23	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750
	360/70 R 24	122 A8/B	W12 W11 W10	360 14.2	1152 45.4	524 20.6	3418 134.6	41 52	62 137	0.8 12	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
										1 15	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510
										1.3 19	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
										1.6 23	2250 4960	1850 4070	1610 3550	1500 3300	1500 3300
	380/70 R 24	125 A8/B	W13 W12 W11	380 15	1190 46.9	540 21.3	3523 138.7	42 53	69 152	0.8 12	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
										1 15	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750
										1.3 19	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220
										1.6 23	2480 5460	2030 4470	1770 3900	1650 3630	1650 3630
	420/70 R 24	130 A8/B	W12 W13 W14L	430 16.9	1248 49.1	563 22.2	3683 145	43 54	79 174	0.8 12	1910 4210	1560 3440	1360 3000	1270 2800	1270 2800
										1 15	2160 4760	1770 3900	1540 3390	1440 3170	1440 3170
										1.3 19	2520 5550	2070 4560	1800 3960	1680 3700	1680 3700
										1.6 23	2850 6280	2340 5150	2030 4470	1900 4190	1900 4190
	480/70 R 24	138 A8/B	W14L W15L W16L	490 19.3	1316 51.8	591 23.3	3871 152.4	48 60	102 226	0.8 12	2360 5200	1930 4250	1680 3700	1570 3460	1570 3460
										1 15	2690 5930	2200 4850	1920 4230	1790 3940	1790 3940
										1.3 19	3140 6920	2570 5660	2240 4930	2090 4600	2090 4600
										1.6 23	3540 7800	2900 6390	2530 5570	2360 5200	2360 5200


These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						bar psi	Maximum Load		kg lbs	

R 28										0.8 12	1370 3020	1120 2470	970 2140	910 2000	910 2000
320/70 R 28	119 A8/B	W9 W10 W11	320 12.6	1190 46.9	550 21.6	3562 140.2	40 51	57 126		1 15	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270
										1.3 19	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640
										1.6 23	2040 4490	1670 3680	1460 3220	1360 3000	1360 3000
360/70 R 28	125 A8/B	W12 W11 W10	360 14.2	1251 49.3	574 22.6	3730 146.9	41 52	67 149		0.8 12	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
										1 15	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750
										1.3 19	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220
										1.6 23	2480 5460	2030 4470	1770 3900	1650 3630	1650 3630
380/70 R 28	127 A8/B	W13 W12 W11	380 15	1293 50.9	591 23.3	3846 151.4	42 52	76 167		0.8 12	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580
										1 15	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
										1.3 19	2330 5130	1910 4210	1660 3660	1550 3410	1550 3410
										1.6 23	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850
420/70 R 28	133 A8/B	W12 W13 W14L	430 16.9	1349 53.1	614 24.2	3985 156.9	43 54	90 197		0.8 12	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
										1 15	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
										1.3 19	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
										1.6 23	3090 6810	2530 5570	2200 4850	2060 4540	2060 4540
480/70 R 28	140 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	47.5 60	108.9 240		0.8 12	2510 5530	2050 4520	1790 3940	1670 3680	1670 3680
										1 15	2850 6280	2850 6280	2030 4470	1900 4190	1900 4190
										1.3 19	3320 7310	3320 7310	2360 5200	2210 4870	2210 4870
										1.6 23	3750 8260	3750 8260	2680 5900	2500 5510	2500 5510

These are tubeless tires

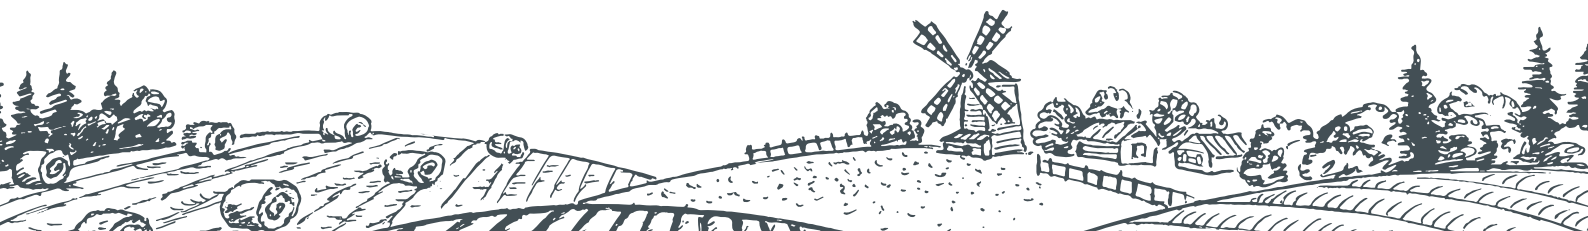

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi


480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	48 60	109 240	2 29	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770
									2.4 35	4370 9630	3580 7890	3110 6850	2910 6410	2910 6410
									2.8 41	4790 10550	3920 8630	3410 7510	3190 7030	3190 7030
									3.2 46	5180 11410	4240 9340	3690 8130	3450 7600	3450 7600
600/70 R 28	161 A8/B	DW18L DW20B	611 24.1	1551 61.1	692 27.2	4532 178.4	52.5 66	183.8 405.2	1.8 26	5360 11810	4390 9670	3820 8410	3570 7860	3570 7860
									2 29	5700 12560	4670 10290	4070 8960	3800 8370	3800 8370
									2.4 35	3650 13990	5200 11450	4530 9980	4230 9320	4230 9320
									2.8 41	6940 15290	5130 11300	4950 10900	4628 10190	4625 10190
420/70 R 30	134 A8/B	W12 W13 W14L	430 16.9	1398 55	639 25.1	4156 163.6	43 54	94 207	0.8 12	2120 4670	1730 3810	1510 3330	1410 3110	1410 3110
									1 15	2420 5330	1980 4360	1720 3790	1610 3550	1610 3550
									1.3 19	2820 6210	2310 5090	2010 4430	1880 4140	1880 4140
									1.6 23	3180 7000	2610 5750	2270 5000	2120 4670	2120 4670
480/70 R 30	141 A8/B	W14L W15L W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	48 60	118 260	0.8 12	2580 5680	2120 4670	1840 4050	1720 3790	1720 3790
									1 15	2940 6480	2410 5310	2100 4630	1960 4320	1960 4320
									1.3 19	3420 7530	2800 6170	2440 5370	2280 5020	2280 5020
									1.6 23	3860 8500	3170 6980	2760 6080	2575 5670	2575 5670
480/70 R 30	147 D 150 A8	W14L W15L W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	47 60	125 279	1.5 22	3510 7730	2880 6340	2500 5510	2560 5640	2460 5420
									1.8 26	4280 9430	3200 7050	2780 6120	2850 6280	2730 6010
									2 29	4530 9980	3390 7470	2950 6500	3020 6650	2900 6390
									2.4 35	4610 10150	3780 8330	3540 7800	3370 7420	3230 7110

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load		kg lbs	
520/70 R 30	145 A8/B	W15L W16L W18L	516 20.9	1536 60.5	743 27.3	4946 178.6	52 65	145 319	0.8 12	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
									1 15	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
									1.3 19	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
									1.6 23	4350 9580	3570 7860	3100 6830	2900 6390	2900 6390
600/70 R 30	152 A8/B	DW18L DW20B	611 24.06	1602 63.07	717 28.25	4681 184.3	52.5 66	174.5 384.7	0.8 12	3540 7800	2900 6390	2530 5570	2360 5200	2360 5200
									1 15	4040 8900	3310 7290	2880 6340	2690 5930	2690 5930
									1.3 19	4710 10370	3860 8500	3360 7400	3140 6920	3140 6920
									1.6 23	5330 11740	3940 8680	3800 8370	3550 7820	3550 7820
600/70 R 30	158 A8/B	DW18L DW20B	611 24.06	1602 63.07	717 28.25	4681 184.3	52.5 66	181.5 400	1.8 26	5390 11870	4420 9740	3840 8460	3590 7910	3590 7910
									2 29	5730 12620	4700 10350	4090 9010	3820 8410	3820 8410
									2.2 32	6060 13350	4970 10950	4320 9520	4040 8900	4040 8900
									2.4 35	6380 14050	4720 10400	4550 10020	4250 9360	4250 9360
480/70 R 34	143 A8/B	W14L W15L W16L	490 19.3	1580 62.2	722 28.4	4698 185	47.5 60	129.5 285.5	0.8 12	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
									1 15	3110 6850	2550 5620	2210 4870	2070 4560	2070 4560
									1.3 19	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
									1.6 23	4090 9010	3350 7380	2920 6430	2725 6000	2725 6000
480/70 R 34	149 A8/B	W14L W15L W16L	490 10.3	1580 62.2	722 28.4	4698 185	47.5 60	143.5 316.3	1.8 26	4130 9100	3380 7440	2940 6480	2750 6060	2750 6060
									2 29	4380 9650	3590 7910	3120 6870	2920 6430	2920 6430
									2.2 32	4640 10220	3800 8370	3310 7290	3090 6810	3090 6810
									2.4 35	4880 10750	3610 7950	3480 7670	3250 7160	3250 7160

These are tubeless tires

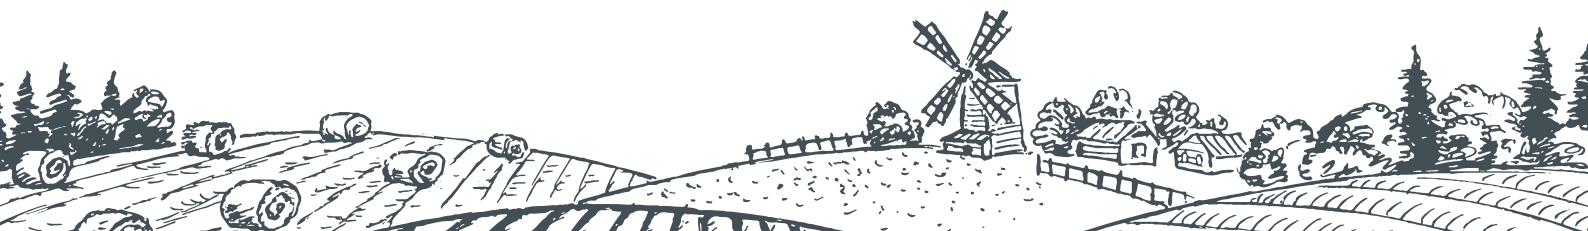

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in						mm in	mm in	mm 32 nds	kg lbs	bar psi Maximum Load kg lbs

R 38

520/70 R 34	148 A8/B	W15L W16L W18L	530 20.9	1640 64.6	746 29.4	4864 191.5	51.5 65	162.5 358.2	0.8 12	3150 6940	2580 5680	2250 4960	2100 4630	2100 4630
									1 15	3590 7910	2940 6480	2560 5640	2390 5260	2390 5260
									1.3 19	4190 9230	3430 7560	2990 6590	2790 6150	2790 6150
									1.6 23	4730 10420	3870 8520	3370 7420	3150 6940	3150 6940
480/70 R 38	145 A8/B	W14L W15L W16L	500 19.7	1680 66.1	773 30.4	5013 197.4	47.5 60	144.5 318.5	0.8 12	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
									1 15	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
									1.3 19	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
									1.6 23	4350 9580	3220 7090	3100 6830	2900 6390	2900 6390
520/70 R 38	150 A8/B	W15L W16L W18L	530 20.9	1749 68.9	800 31.5	5204 204.9	51 65	176 388	0.8 12	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930
									1 15	3830 8440	3140 6920	2730 6010	2550 5620	2550 5620
									1.3 19	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540
									1.6 23	5030 11080	4120 9070	3580 7890	3350 7380	3350 7380
580/70 R 38	155 A8/B	W18L	577 22.72	1827 71.93	832 32.7	5420 213.4	54 68	208 458	0.8 12	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680
									1 15	4410 9710	3620 7970	3150 6940	2940 6480	2940 6480
									1.3 19	5150 11340	4220 9300	3670 8080	3430 7560	3430 7560
									1.6 23	5810 12800	4770 10510	4150 9140	3875 8540	3875 8540
710/70 R 38	172 A8/B	DW23B DW25B	716 28.15	1959 77.13	881 34.67	5785 227.8	54.5 68.5	299 660	1.8 26	7790 17160	6380 14050	5550 12220	5190 11430	5190 11430
									2 29	8280 18240	6790 14960	5910 13020	5520 12160	5520 12160
									2.2 32	8760 19300	7180 15810	6250 13770	5840 12860	5840 12860
									2.4 35	9230 20330	6830 15040	6580 14490	6150 13550	6150 13550

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						10 6	25 12	40 25	50 31	65	70
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load			kg lbs	

710/70 R 38	178 A8/B	DW23B DW25B	715 28.15	1959 77.13	881 34.67	5785 227.8	54.5 68.5	308 679	2.6 38	9960 21940	7100 15640	6640 14630	6640 14630		
									2.8 41	10400 22910	7420 16340	6930 15260	6930 15260		
									3 44	10830 23850	7730 17030	7220 15900	7220 15900		
									3.2 46	11250 24780	8030 17690	7500 16520	7500 16520		
710/70 R 38	178 D 181 AB	DW23B DW25B	715 28.1	1959 77.1	881 34.7	5785 227.8	54.5 68.5	305 672.8	2.6 38	9960 21940	7870 17330	7270 16010	6970 15350	6640 14630	6040 13300
									2.8 41	10400 22910	8210 18080	7590 16720	7280 16040	6930 15260	6310 13900
									3 44	10830 23850	8560 18850	7910 17420	7580 16700	7220 15900	6570 14470
									3.2 46	11250 24780	8890 19580	8210 18080	7880 17360	7500 16520	6830 15040
710/70 R 42	173 A8/B	DW23L DW25B	715 28.15	2061 81.14	932 36.68	6119 240.9	54.5 68.5	324 714	1.8 26	8240 18150	5490 12090	5490 12090	5490 12090		
									2 29	8760 19300	5840 12860	5840 12860	5840 12860		
									2.2 32	9270 20420	6180 13610	6180 13610	6180 13610		
									2.4 35	9750 21480	6500 14320	6500 14320	6500 14320		
710/70 R 42	173D 176A8	DW 23B DW 25B	715 28.1	2061 81.1	932 36.7	6119 240.9	54.5 68.5	322.9 711.8	1.8 26	8240 18150	6510 14340	6010 13240	5760 12690	5490 12090	5000 11010
									2 29	8760 19300	6920 15240	6390 14070	6130 13500	5840 12860	5310 11700
									2.2 32	9270 20420	7320 16120	6770 14910	6490 14300	6180 13610	5620 12380
									2.4 35	9750 21480	7700 16960	7120 15680	6830 15040	6500 14320	5920 13040

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph				
			SW	OD						10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load			kg lbs

FARMAX R 90

R 30

420/90 R 30	147 A8/B	DW13 W14L	436 16.8	1518 59.8	684 26.9	4483 176.5	47.5 59.8	120.5 265.5	1.8 26	3900 8590	3200 7050	2780 6120	2600 5730	2600 5730
									2 29	4140 9120	3390 7470	2950 6500	2760 6080	2760 6080
									2.2 32	4380 9650	3590 7910	3120 6870	2920 6430	2920 6430
									2.4 35	4610 10150	3780 8330	3290 7250	3075 6770	3075 6770

These are tubeless tires



65 SERIES AGRI RADIAL (R1 W)

WITH THE POWER OF CTR*

FEATURE

- Tilted lug tip

BENEFIT

- Lesser vibration and noise

FEATURE

- Mud breaker

BENEFIT

- Better self cleaning

FEATURE

- Higher angle and lug overlap at center

BENEFIT

- Better roadability

FEATURE

- R1 W tread depth

BENEFIT

- Longer tire life

FEATURE

- Lower angle at shoulder

BENEFIT

- Superior traction

FEATURE

- Rounded shoulder

BENEFIT

- Reduced damage to soil and crop

FEATURES

- Wider tread
- Larger inner volume

BENEFIT

- Reduced soil compaction

*CTR: Low Compaction, High Traction, High Roadability




Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph	Infl. Press.	Speed	kmph mph
										Field Operations	Non-Cyclic Operations				Cyclic Operations
			25	40							50	65		10	15
			16	25							31	40		6	9
			mm in	mm in							mm in	mm in		mm 32 nds	kg lbs

FARMAX R 65

R 20

340/65R20	124 D	W11L W10L W12L	343 13.5	950 37.4	432 17	2850 112	33 41.5	42 92.5	1.8 26	1550 3410	1600 3520	1480 3260	1420 3130	1350 2970	2.25 33	2300 5070	2090 4600
									2 29	1660 3660	1710 3770	1580 3480	1510 3330	1440 3172	2.5 36	2450 5400	2230 4910
									2.2 32	1750 3850	1800 3960	1660 3660	1600 3520	1520 3350	2.75 40	2580 5680	2360 5200
									2.4 35	1840 4050	1900 4190	1750 3850	1680 3700	1600 3520	3 44	2720 5990	2480 5460
420/65R20	135 D	W13L W11L W12L	418 16.5	1054 41.5	473 19	3113 123	36 45.3	60 132.2	1.8 26	2120 4670	2180 4800	2010 4430	1930 4250	1840 4050	2.25 33	3130 6890	2850 6280
									2 29	2250 4960	2320 5110	2150 4740	2060 4540	1960 4320	2.5 36	3330 7330	3040 6700
									2.2 32	2380 5240	2450 5400	2270 5000	2170 4780	2070 4560	2.75 40	3520 7750	3210 7070
									2.4 35	2510 5530	2580 5680	2390 5260	2290 5040	2180 4800	3 44	3710 8170	3380 7440
440/65R20	138 D	W14L W13L W15L	441 17.4	1080 42.5	483 19	3240 128	43.5 48.8	70 154.3	1.8 26	2290 5040	2360 5200	2080 4800	2090 4600	1990 4380	2.25 33	3380 7440	3080 6780
									2 29	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.5 36	3600 7930	3290 7250
									2.2 32	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.75 40	3810 8390	3470 7640
									2.4 35	2710 5970	2800 6170	2580 5680	2480 5460	2360 5200	3 44	4010 8830	3660 8060
420/65R24	138 D	W13L W11L W12L	418 16.5	1156 45.5	524 21	3414 134	44 55	82 181	2.4 35	2300 5070	2370 5220	2190 4820	2100 4630	2000 4410	3 44	3400 7490	3100 6830
									2.8 41	2520 5550	2600 5730	2400 5290	2300 5070	2190 4820	3.5 51	3720 8190	3390 7470
									3 44	2620 5770	2700 5950	2500 5510	2390 5260	2280 5020	3.75 54	3880 8550	3530 7780
									3.2 46	2710 5970	2800 6170	2580 5680	2480 5460	2360 5200	3.9875 58	4010 8830	3660 8060
440/65 R 24	135 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	44 55	82 181	0.8 12	1370 3020	1410 3110	1300 2860	1250 2750	1190 2620	1 15	2020 4450	1840 4050
									1 15	1560 3440	1610 3550	1490 3280	1430 3150	1360 3000	1.25 18	2310 5090	2110 4650
									1.3 19	1830 4030	1880 4140	1740 3830	1670 3680	1590 3500	1.25 24	2700 5950	2460 5420
									1.6 23	2070 4560	2130 4690	1970 4340	1890 4160	1800 3960	2 29	3060 6740	2790 6150

These are tubeless tires

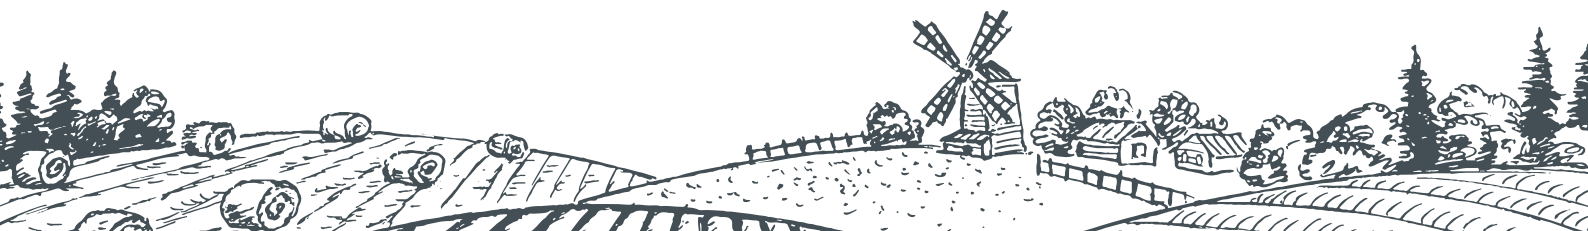

Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph		Infl. Press.	Speed	kmph mph
										Field Operations	Non-Cyclic Operations				Cyclic Operations	
			25	40							50	65	10		15	
			16	25							31	40	6		9	
			mm in	mm in							mm in	mm in	mm 32 nds		kg lbs	bar psi

440/65 R 24	135 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	43.7 55	87.5 192.9	1.8 26	2120 4670	2180 4800	2010 4430	1930 4250	1840 4050	2.25 33	3130 6890	2850 6280
									2 29	2250 4960	2320 5110	2150 4740	2060 4540	1960 4320	2.5 36	3330 7330	3040 6700
									2.2 32	2380 5240	2450 5400	2270 5000	2170 4680	2070 4560	2.75 40	3520 7750	3210 7070
									2.4 35	2510 5530	2580 5680	2390 5260	2290 5040	2180 4800	3 44	3710 8170	3380 7440
480/65 R 24	133 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	46 58	96 211	0.8 12	1580 3480	1620 3570	1500 3300	1440 3170	1370 3020	1 15	2330 5130	2120 4670
									1 15	1790 3940	1850 4070	1710 3770	1640 3610	1560 3440	1.25 18	2650 5840	2420 5330
									1.3 19	2090 4600	2160 4760	1990 4380	1910 4210	1820 4010	1.63 24	3090 6810	2820 6210
									1.6 23	2370 5220	2440 5370	2260 4980	2160 4760	2060 4540	2 29	3500 7710	3190 7030
480/65 R 24	140 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	46 58	91 200	1.8 26	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.25 33	3600 7930	3290 7250
									2 29	2590 5700	2670 5880	2460 5420	2360 5200	2250 4960	2.5 36	3830 8440	3490 7690
									2.2 32	2740 6040	2820 6210	2610 5750	2500 5510	2380 5240	2.75 40	4050 8920	3690 8130
									2.4 35	2880 6340	2960 6520	2740 6040	2630 5790	2500 5510	3 44	4250 9360	3880 8550
540/65 R 24	140 D	W16L W18L	550 21.7	1235 51.7	590 23	3860 152	50 63	120 265	0.8 12	1920 4230	1980 4360	1830 4030	1750 3850	1670 3680	1 15	2840 6260	2590 5700
									1.0 15	2190 4820	2250 4960	2080 4580	2000 4410	1900 4190	1.25 18	3230 7110	2950 6500
									1.3 19	2540 5590	2620 5770	2420 5330	2320 5110	2210 4870	1.625 24	3760 8280	3430 7560
									1.6 23	2880 6340	2960 6520	2740 6040	2630 5790	2500 5510	2 29	4250 9360	3880 8550
540/65 R 24	146 D	W16L W18L	550 21.7	1312 51.7	590 23	3860 152	50 63	120.5 265.6	0.8 12	1820 4010	1870 4120	1730 3810	1660 3660	1580 3480	1 15	2690 5930	2450 5400
									1 15	2070 4560	2130 4690	1970 4340	1890 4160	1800 3960	1.25 18	3060 6740	2790 6150
									1.3 19	2420 5330	2490 5480	2300 5070	2210 4870	2100 4630	1.625 24	3570 7860	3260 7180
									2.4 35	3450 7600	3560 7840	3290 7250	3150 6940	3000 6610	3 44	5100 11230	4650 10240

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph		Infl. Press.	Speed	kmph mph	
			SW	OD						Field Operations	Non-Cyclic Operations				Cyclic Operations		
											25	40	50		65	10	15
											16	25	31		40	6	9
											mm in	mm in	mm in		mm in	32 nds	kg lbs
440/65 R 28	138 D	W13 W14L W15L	441 17.4	1283 50.5	587 23.1	3819 150.3	43.7 55	92 203	1.8 26	2290 5040	2360 5200	2180 4800	2090 4600	1990 4380	2.3 33	3380 7740	3080 6780
									2.0 29	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.5 36	3600 7930	3290 7250
									2.2 32	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.8 40	3810 8390	3470 7640
									2.4 35	2710 5970	2800 6170	2580 5680	2480 5460	2360 5200	3 44	4010 8830	3660 8060
480/65 R 28	136 D	W15L W14L	480 18.9	1335 52.6	608 23.9	3962 156	47 59	99 218	0.8 12	1710 3770	1770 3900	1630 3590	1560 3440	1490 3280	1 15	2530 5570	2310 5090
									1 15	1960 4320	2010 4430	1860 4100	1790 3940	1700 3740	1.3 18	2890 6370	2640 5810
									1.3 19	2280 5020	2350 5180	2170 4780	2080 4580	1980 4360	1.6 24	3370 7420	3070 6760
									1.6 23	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2 29	3810 8390	3470 7640
480/65 R 28	142 D	W15L W14L	480 18.9	1335 52.6	608 23.9	3962 156	46.5 59	103 228	1.8 26	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.25 33	3810 8390	3470 7640
									2.0 29	2740 6040	2820 6210	2610 5750	2500 5510	2380 5240	2.50 36	4050 8920	3690 8130
									2.2 32	2900 6390	2990 6590	2760 6080	2650 5840	2520 5550	2.75 40	4280 9430	3910 8610
									2.4 35	3050 6720	3140 6920	2900 6390	2780 6120	2650 5840	3 44	4510 9930	4110 9050
540/65 R 28	142 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	50 63	125 275	0.8 12	2040 4490	2100 5630	1940 4270	1860 4100	1770 3900			
									1 15	2320 5110	2390 5260	2210 4870	2120 4670	2020 4450	1.25 18	3430 7560	3130 6890
									1.3 19	2700 5950	2780 6120	2570 5660	2470 5440	2350 5180	1.625 24	4000 8810	3640 8020
									1.6 23	3050 6720	3140 6920	2900 6390	2780 6120	2650 5840	2 29	4510 9930	4110 9050
540/65 R 28	149 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	50 63	133 293	1.4 20	2730 6010	2810 6190	2600 5730	2490 5480	2370 5220	1.75 25	4030 8880	3670 8080
									1.6 23	2940 6480	3030 6670	2800 6170	2690 5930	2560 5640	2 29	4350 9580	3970 8740
									2.0 29	3360 7400	3460 7620	3200 7050	3070 6760	2920 6430	2.5 36	4960 10930	4530 9980
									2.4 35	3740 8240	3850 8480	3560 7840	3410 7510	3250 7160	3 44	5530 12180	5040 11100

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed			kmph mph		Infl. Press.	Speed	kmph mph
										Field Operations	Non-Cyclic Operations					Cyclic Operations	
											25	40	50	65		10	15
			16	25							31	40	6	9			
			bar psi	Maximum Load					kg lbs		bar psi	Recom. Load	kg lbs				
600/65 R 28	147 D	DW20B W18L	591 23.3	1491 58.7	668 26	4473 176	53.4 67	154 339.5	0.8 12	2350 5180	2420 5330	2230 4910	2140 4710	2040 4490	1 15	3470 7640	3160 6960
									1 15	2680 5900	2760 6080	2550 5620	2450 5400	2330 5130	1.25 18	3960 8720	3610 7950
									1.3 19	3130 6890	3220 7090	2980 6560	2860 6300	2720 5990	1.63 24	4620 10180	4220 9330
									1.6 23	3540 7800	3640 8020	3370 7420	3230 7110	3075 6770	2 29	5230 11520	4770 10510
600/65 R 28	154 D	DW20B W18L	591 23.3	1491 58.7	668 26	4473 176	53.4 67	160 352.7	1.8 26	3650 8040	3760 8280	3470 7640	3330 7330	3170 6980	2.25 33	5390 11870	4910 10810
									2.0 29	3880 8550	3990 8790	3690 8130	3540 7800	3370 7420	2.5 36	5730 12620	5220 11500
									2.2 32	4090 9010	4220 9300	3900 8590	3740 8240	3560 7840	2.75 40	6050 13330	5520 12160
									2.4 35	4310 9490	4440 9780	4110 9050	3940 8680	3750 8260	3 44	6380 14050	5810 12800
540/65 R 30	143 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	50 63	133 293.8	0.8 12	2090 4600	2160 4760	1990 4380	1910 4210	1820 4010	1 15	3090 6810	2820 6210
									1 15	2380 5240	2450 5400	2270 5000	2170 4780	2070 4560	1.25 18	3520 7750	3210 7070
									1.3 19	2770 6100	2860 6300	2640 5810	2530 5570	2410 5310	1.625 24	4100 9030	3740 8240
									1.6 23	3130 6890	3230 7110	2980 6560	2860 6300	2725 6000	2 29	4630 10200	4220 9300
540/65 R 30	150 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	50 63	141 310	0.8 12	2020 4450	2090 4600	1930 4250	1850 4070	1760 3880	1 15	2990 6590	2730 6010
									1 15	2310 5090	2380 5240	2200 4850	2110 4650	2010 4430	1.25 18	3420 7530	3120 6870
									1.3 19	2690 5930	2770 6100	2560 5640	2460 5420	2340 5150	1.625 24	3980 8770	3630 8000
									2.4 35	3850 8480	3970 8740	3670 8080	3520 7750	3350 7380	3 44	5700 12560	5190 11430
600/65 R 30	149 D	DW20B W18L	611 24.1	1542 60.7	693 27	4628 182	53.4 67	162 357	0.8 12	2500 5510	2570 5660	2380 5240	2280 5020	2170 4780	1 15	3690 8130	3360 7400
									1 15	2840 6260	2930 6450	2700 5950	2590 5700	2470 5440	1.25 18	4200 9250	3830 8440
									1.3 19	3310 7290	3410 7510	3150 6940	3020 6650	2880 6340	1.63 24	4900 10790	4460 9820
									1.6 23	3740 8240	3850 8480	3560 7840	3410 7510	3250 7160	2 29	5530 12180	5040 11100

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph		Infl. Press.	Speed	kmph mph
										Field Operations	Non-Cyclic Operations				Cyclic Operations	
			25	40							50	65	10		15	
			16	25							31	40	6		9	
			mm in	mm in					mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs

R 34

600/65 R 30	155 D	DW20B W18L	611 24.1	1542 60.7	693 27	4628 182	53.4 67	171 377	1.8 26	3760 8280	3870 8520	3580 7890	3430 7560	3270 7200	2.25 33	5560 12250	5070 11170
									2.0 29	4000 8810	4120 9070	3810 8390	3650 8040	3480 7670	2.5 36	5920 13040	5390 11870
									2.2 32	4230 9320	4360 9600	4030 8880	3860 8500	3680 8110	2.75 40	6260 13790	5700 12560
									2.4 35	4460 9820	4590 10110	4240 9340	4070 8960	3875 8540	3 44	6590 14520	6010 13240
540/65 R 34	145 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	50 63	148 326	0.8 12	2220 4890	2290 5040	2110 4650	2030 4470	1930 4250	1 15	3280 7220	2990 6590
									1 15	2530 5570	2610 5750	2410 5310	2310 5090	2200 4850	1.25 18	3740 8240	3410 7510
									1.3 19	2960 6520	3050 6720	2810 6190	2700 5950	2570 5660	1.625 24	4370 9630	3980 8770
									1.6 23	3340 7360	3440 7580	3180 7000	3050 6720	2900 6390	2 29	4930 10860	4500 9910
540/65 R 34	152 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	50 63	153 338	0.8 12	2150 4740	2220 4890	2050 4520	1960 4320	1870 4120	1 15	3180 7000	2900 6390
									1 15	2450 5400	2520 5550	2330 5130	2240 4930	2130 4690	1.3 18	3620 7970	3300 7270
									1.3 19	2850 6280	2940 6480	2720 5990	2600 5730	2480 5460	1.6 24	4220 9300	3840 8460
									2.4 35	4080 8990	4210 9270	3890 8570	3730 8220	3550 7820	3 44	6040 13300	5500 12110
600/65 R 34	151D	DW20B W18L	600 23.6	1644 64.7	748 29.4	4916 193.5	53.4 67	175.5 386.9	0.8 12	2650 5840	2730 6010	2520 5550	2420 5330	2300 5070	1 15	3910 8610	3570 7860
									1 15	3010 6630	3100 6830	2870 6320	2750 6060	2620 5770	1.25 18	4450 9800	4060 8940
									1.3 19	3520 7750	3630 8000	3350 7380	3210 7070	3060 6740	1.63 24	5200 11450	4740 10440
									1.6 23	3970 8740	4090 9010	3780 8330	3620 7970	3450 7600	2 29	5870 12930	5350 11780
600/65 R 34	157 D	DW20B W18L	600 23.6	1644 64.7	748 29.4	4816 193.5	53 67	175 386	1.8 26	4010 8830	4140 9120	3820 8410	3660 8060	3490 7690	2.3 33	5930 13060	5410 11920
									2.0 29	4270 9410	4400 9690	4060 8940	3900 8590	3710 8170	2.5 36	6310 13900	5750 12670
									2.2 32	4510 9930	4650 10240	4290 9450	4120 9070	3920 8630	2.8 40	6660 14670	6080 13390
									2.4 35	4740 10440	4890 10770	4520 9960	4330 9540	4125 9090	3 44	7010 15440	6390 14070

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph	Infl. Press.	Speed	kmph mph	
										Field Operations	Non-Cyclic Operations				Cyclic Operations	
			25	40							50	65		10		15
			16	25							31	40		6		9
			mm in	mm in					mm in	mm in	mm 32 nds	kg lbs	bar psi	Maximum Load		kg lbs

R 38

540/65 R 38	147 D	W16L W18L	550 21.7	1667 65.6	767 30	4975 196	50 63	156.5 345	0.8 12	2350 5180	2420 5330	2230 4910	2140 4710	2040 4490	1 15	3470 7640	3160 6960
									1 15	2680 5900	2760 6080	2550 5620	2450 5400	2330 5130	1.25 18	3960 8720	3610 7950
									1.3 19	3130 6890	3220 7090	2980 6560	2860 6300	2720 5990	1.625 24	4620 10180	4220 9300
									1.6 23	3540 7800	3640 8020	3370 7420	3230 7110	3075 6770	2 29	5230 11520	4770 10510
540/65 R 38	153 D	W16L W18L	550 21.7	1667 65.6	767 30	4975 196	50 63	168 370	1.8 26	3540 7800	3650 8040	3370 7420	3230 7110	3080 6780	2.25 33	5240 11540	4770 10510
									2.0 29	3770 8300	3890 8570	3590 7910	3440 7580	3280 7220	2.5 36	5580 12290	5080 11190
									2.2 32	3990 8790	4110 9050	3800 8370	3640 8020	3470 7640	2.8 40	5900 13000	5380 11850
									2.4 35	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	3 44	6210 13680	5660 12470
600/65 R 38	153 D	DW20B W18L	600 23.6	1745 68.7	798 31.4	5236 206.2	58 73	214 472	0.8 12	2790 6150	2880 6340	2660 5860	2550 5620	2430 5350	1 15	4130 9100	3770 8300
									1 15	3190 7030	3280 7220	3030 6670	2910 6410	2770 6100	1.25 18	4710 10370	4290 9450
									1.3 19	3710 8170	3830 8440	3540 7800	3390 7470	3230 7110	1.625 24	5490 12090	5010 11040
									1.6 23	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	2 29	6210 13680	5660 12470
650/65 R 38	157 D	DW20B	645 25.4	1811 216.1	825 32.5	5489 216.1	53 67	193 426	0.8 12	3160 6960	3260 7180	3010 6630	2890 6370	2750 6060			
									1 15	3600 7930	3710 8170	3430 7560	3290 7250	3130 6890	1.25 18	5320 11720	4850 10680
									1.3 19	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	1.625 24	6210 13680	5660 12470
									1.6 23	4740 10440	4890 10770	4520 9960	4330 9540	4125 9090	2 29	7010 15440	6390 14070
650/65 R 38	163 D	DW20B	645 25.4	1811 71.3	825 32.5	5489 216.1	58 73	227 501	1.4 20	4080 8990	4210 9270	3890 8570	3730 8220	3550 7820	1.75 25	6040 13300	5500 12110
									1.6 23	4420 9740	4550 10020	4200 9250	4030 8880	3840 8460	2 29	6530 14380	5950 13110
									2.0 29	5040 11100	5190 11430	4800 10570	4600 10130	4380 9650	2.5 36	7450 16410	6790 14960
									2.4 35	5610 12360	5780 12730	5340 11760	5120 11280	4875 10740	3 44	8290 18260	7560 16650

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph	Infl. Press.	Speed	kmph mph		
										Field Operations	Non-Cyclic Operations				Cyclic Operations		
			SW	OD							25	40		50	65	10	15
											16	25		31	40	6	9
			mm in	mm in							mm in	mm in		mm 32nds	kg lbs	bar psi	Maximum Load

R 42

650/65 R 42	158 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	58 73	234 515	0.8 12	3250 7160	3350 7380	3100 6830	2970 6540	2830 6230	1 15	4810 10590	4390 9670
									1 15	3710 8170	3830 8440	3540 7800	3390 7470	3230 7110	1.25 18	5490 12090	5010 11040
									1.3 19	4320 9520	4460 9820	4120 9070	3950 8700	3760 8280	1.63 24	6390 14070	5830 12840
									1.6 23	4890 10770	5040 11100	4650 10240	4460 9820	4250 9360	2 29	7230 15930	6590 14520
650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	58 73	252 555	1.8 26	4990 10990	5140 11320	4750 10460	4560 10040	4340 9560	2.25 33	7380 16260	6730 14820
									2 29	5310 11700	5470 12050	5060 11150	4850 10680	4620 10180	2.50 36	7850 17290	7160 15770
									2.2 32	5620 12380	5790 12750	5350 11780	5130 11300	4890 10770	2.75 40	8310 18300	7580 16700
									2.4 35	5920 13040	6100 13440	5640 12420	5410 11920	5150 11340	3 44	8760 19300	7980 17580
650/65 R 42	170 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	58 73	261.5 576.5	2.4 35	5840 12860	6020 13260	5560 12250	5330 11740	5080 11740	3 44	8640 19030	7870 17330
									2.8 41	6390 14070	6590 14520	6090 13410	5480 12860	5840 12860	3.50 51	9450 20810	8620 18990
									3 44	6660 14670	6860 15110	6340 13960	6080 13390	6080 13390	3.75 54	9840 21670	8970 19760
									3.2 46	6900 15200	7110 15660	6570 14470	6300 13880	6000 13220	4 58	10200 22470	9300 20480

These are tubeless tires



TORQUEMAX

WITH THE POWER OF CTR*

FEATURE

- Stepped lug design

BENEFIT

- Better Grip

FEATURE

- Tilted lug tip

BENEFIT

- Lower vibration at high speeds.

FEATURE

- Wider tread width

BENEFIT

- Lower Compaction



FEATURE

- Strong & wider lugs

BENEFIT

- Provides higher contact area leading to higher life

FEATURE

- Lower lug angle at the shoulder

BENEFIT

- Better traction

FEATURE

- Rounder shoulder

BENEFIT

- Lesser soil/crop damage

*CTR-Low Compaction, High Traction, High Roadability



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed, kmph (mph)						
			SW	OD						Static	10	20	30	40	50	65
			mm in	mm in						bar psi	Maximum Load		kg lbs			

TORQUEMAX

480/80 R50	159D 162A8	DW15L DW16L	485 19.1	2038 80.2	950 37.4	6082 239.5	52.4 66	201.8 444.89	0.8 12	5290 11650	3450 7600	2830 6230	2650 5840	2520 5550	2420 5330	2300 5070
									1.2 17	6720 14800	4380 9650	3590 7910	3360 7400	3200 7050	3070 6760	2920 6430
									1.6 23	7940 17490	5180 11410	4240 9340	3970 8740	3780 8330	3620 7970	3450 7600
									1.8 26	8510 18740	5550 12220	4550 10020	4260 9380	4050 8920	3890 8570	3700 8150
									2 29	9040 19910	5900 13000	4830 10640	4520 9960	4300 9470	4130 9100	3930 8660
									2.4 35	10060 22160	6560 14450	5380 11850	5030 11080	4790 10550	4590 10110	4375 9640
480/80 R50	165D 168A8	DW15L DW16L	485 19.1	2038 80.2	950 37.4	6082 239.5	52.4 66	210 462.9	0.8 12	5270 11610	3440 7580	2630 5790	2510 5530	2400 5290	2290 5040	2300 5070
									1.2 17	6670 14690	4350 9580	3340 7360	3180 7000	3050 6720	2900 6390	2920 6430
									1.6 23	7890 17380	5150 11340	3940 8680	3760 8280	3600 7930	3430 7560	3450 7600
									1.8 26	8460 18630	5520 12160	4230 9320	4030 8880	3860 8500	3680 8110	3700 8150
									2 29	8990 19800	5870 12930	4500 9910	4280 9430	4110 9050	3910 8610	3930 8660
									3.2 46	11850 26100	7730 17030	5920 13040	5640 12420	5410 11920	5150 11340	4375 9640

These are tubeless tyres



ROW CROP AG RADIAL

WITH THE POWER OF CTR*

FEATURE

- Higher angle and lug overlap at center

BENEFIT

- Better roadability and stability

FEATURE

- Rounded shoulder

BENEFIT

- Reduced crop damage

FEATURE

- Higher number of lugs

BENEFIT

- Superior traction



FEATURE

- D-rated (40 mph) tires

BENEFIT

- Improved transportation speed

FEATURE

- Strong carcass and bead

BENEFIT

- Higher load carrying capacity

*CTR-Low Compaction, High traction, High Roadability



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						Field	10 6	25 16	40 25	50 31	65 40
			mm in	mm in							mm in	mm in	mm 32 nds	kg lbs	bar psi

ROW CROP

R 32

210/95 R 32	117 D 120 A8	W7 W6	214 8.4	1213 47.8	567 22.3	3696 145.5	33 41.5	37.5 82.6	2.0 29	1130 2490	1470 3240	1160 2560	1070 2360	1030 2270	980 2160
									2.4 35	1250 2750	1640 3610	1290 2840	1190 2620	1140 2510	1090 2400
									3.0 44	1430 3150	1860 4100	1470 3240	1360 3000	1300 2860	1240 2730
									3.2 46	1480 3260	1930 4250	1520 3350	1410 3110	1350 2970	1285 2830
230/95 R 32	128 D 131 A8/B	W7 W8	228 9.0	1251 49.3	588 23.1	3808 149.9	33 41.5	42 92.5	2.8 41	1680 3700	2190 4820	1730 3810	1600 3520	1530 3370	1460 3220
									3.6 52	1940 4270	2540 5590	2000 4410	1850 4070	1770 3900	1690 3720
									4 58	2070 5970	2700 5950	2130 4690	1970 4340	1890 4160	1800 3960
270/95 R 32 (11.2 R 32)	133 D 136 A8/B	W11 W12 W13	275 10.8	1327 52.2	613 24.0	4002 157.6	34.9 44	56.5 124.5	2.8 41	1920 4230	2510 5530	1980 4360	1830 4030	1750 3850	1670 3680
									3.6 52	2230 4910	2910 6410	2300 5070	2120 4670	2040 4490	1940 4270
									4 58	2370 5220	3090 6810	2440 5370	2260 4980	2160 4760	2060 4540

R36

230/95 R 36	127 D 130 A8	W7 W8	228 9.0	1352 53.2	633 24.9	4015 158.1	33 41.5	47.5 104.7	2.8 41	1630 3590	2130 4690	1680 3700	1550 3410	1490 3280	1420 3130
									3.6 52	1900 4190	2480 5460	1960 4320	1810 3990	1730 3810	1650 3630
									4 58	2010 4430	2630 5790	2070 4560	1920 4230	1840 4050	1750 3850
230/95 R 36	130 D 133 A8	W8 W7	228 9.0	1352 53.2	633 24.9	4015 158.1	33 41.5	49.5 109	3.4 49	1830 4030	2390 5260	1880 4140	1740 3830	1670 3680	1590 3500
									3.6 52	1900 4190	2480 5460	1960 4320	1810 3990	1730 3810	1650 3630
									4.0 58	2010 4430	2630 5790	2070 4560	1920 4230	1840 4050	1750 3850
									4.2 61	2070 4560	2700 5950	2130 4690	1970 4340	1890 4160	1800 3960
									4.4 64	2130 4690	2780 6120	2190 4820	2030 4470	1940 4270	1850 4070
									4.6 67	2190 4820	2850 6280	2250 4960	2080 4580	2000 4410	1900 4190
270/95 R 36 (11.2 R 36)	136 D 139 A8	W9 W8 W10	275 10.8	1427 56.2	670 26.4	4349 171.2	34.9 44	60.5 133.3	2.8 41	2090 4600	2730 6010	2160 4760	1990 4380	1910 4210	1820 4010
									3.6 52	2430 5350	3170 6980	2500 5510	2310 5090	2220 4890	2110 4650
									4 58	2580 5680	3360 7400	2650 5840	2450 5400	2350 5180	2240 4930

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						Field	10 6	25 16	40 25	50 31	65 40
			mm in	mm in						bar psi	Maximum Load		kg lbs		

R 38

270/95 R 38 (11.2 R 38)	137 D 140 A8	W9 W8 W10	275 10.8	1479 58.2	689 27.1	4507 177.4	35 44	62.5 137.78	2.8 41	2140 4710	2790 6150	2200 4850	2040 4490	1950 4300	1860 4100
									3.6 52	2480 5460	3240 7140	2560 5640	2370 5220	2270 5000	2160 4760
									4 58	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070
270/95 R 38 (11.2 R 38)	140 D 143 A8/B	W9 W8 W10	275 10.8	1479 58.2	689 27.3	4507 177.4	35 44	67 147.7	2.8 41	2140 4710	2790 6150	2200 4850	2040 4490	1950 4300	1860 4100
									3.6 52	2480 5460	3240 7140	2560 5640	2370 5220	2270 5000	2160 4760
									4 58	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070
									4.6 67	2880 6340	3750 8260	2960 6520	2740 6040	2630 5790	2500 5510

R 42

270/95 R 42 (11.2 R 42)	137 D 140 A8	W9 W8 W10	275 10.8	1581 62.2	740 29.1	4790 188.7	34.9 44	68.5 151	2.8 41	2290 5040	2990 6590	2360 5200	2180 4800	2090 4600	1990 4380
									3.2 46	2470 5440	3230 7110	2550 5620	2350 5180	2260 4980	2150 4740
									4 58	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070
270/95 R 42 (11.2 R 42)	139 D 142 A8	W9 W8 W10	275 10.8	1581 62.2	740 29.1	4793 188.7	34.9 44	68.5 151	2.8 41	2290 5040	2990 6590	2360 5200	2180 4800	2090 4600	1990 4380
									3.2 46	2470 5440	3230 7110	2550 5620	2350 5180	2260 4980	2150 4740
									3.6 52	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070
									4 58	2790 6150	3650 8040	2880 6340	2660 5860	2550 5620	2430 5350
320/80 R 42 (12.4 R 42)	141 A8/B	W10	320 12.6	1580 62.2	744 29.3	4688 184.6	42 53	83 183	1.2 17	3340 7360	2180 4800	1780 3920	1550 3410	1450 3190	-
									1.6 23	3960 8720	2580 5680	2120 4670	1840 4050	1720 3790	-
									2.4 35	5010 11040	3270 7200	2680 5900	2330 5130	2180 4800	-
									3.2 46	5920 13040	3860 8500	3170 6980	2760 6080	2575 5670	-
320/90 R 42	136 D 139 A8	W9 W10 W11	319 12.6	1643 64.7	764 30.1	4950 194.9	43.5 54.8	90 198.4	1.8 26	170 4780	2840 6260	2240 4930	2070 4560	1980 4360	1890 4160
									2 29	2310 5090	3020 6650	2380 5240	2200 4850	2110 4650	2010 4430
									2.2 32	2450 5400	3200 7050	2520 5550	2330 5130	2240 4930	2130 4690
									2.4 35	2580 5680	3360 7400	2650 5840	2450 5400	2350 5180	2240 4930

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						Field	10 6	25 16	40 25	50 31	65 40
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load		kg lbs		

320/90 R 42	144 D 147 A8	W10 W9 W11	319 12.6	1643 64.7	764 30.1	4950 194.9	54.8 32	98 216	2.8 41	2770 6100	3620 7970	2860 6300	2640 5810	2530 5570	2410 5310
									3.2 46	3000 6610	3920 8630	3090 6810	2860 6300	2740 6040	2610 5750
									3.6 52	3220 7090	4200 9250	3320 7310	3070 6760	2940 6480	2800 6170
230/95 R 44	129 D 132 A8	W7 W8	228 9.0	1556 61.3	735 28.9	4812 189.5	33 41.5	55 121.2	2.8 41	1840 4050	2400 5290	1900 4190	1750 3850	1680 3700	1600 3520
									3.2 46	1990 4380	2600 5730	2050 4520	1890 4160	1730 3810	1730 3810
									3.6 52	2130 3490	2780 6120	2190 4820	2030 4470	1850 4070	1850 4070
230/95 R 44	134 D 137 A8	W9 W8 W10	228 9.5	1556 61.3	735 28.9	4812 189.5	33 41.5	55.5 122.35	3.6 52	2120 4670	2760 6080	2180 4800	2010 4430	1930 4250	1840 4050
									3.8 55	2190 4820	2850 6280	2250 4960	2080 4580	2000 4410	1900 4190
									4.2 61	2310 5090	3020 6650	2380 5240	2200 4850	2110 4650	2010 4430
									4.6 67	2440 5370	3180 7000	2510 5530	2330 5110	2230 4910	2120 4670
270/95 R 44	140 D 143 A8	W9 W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	35 44	71 156.5	2.8 41	2330 5130	3050 6720	2410 5310	2220 4890	2130 4690	2030 4470
									3.6 52	2700 5950	3530 7780	2780 6120	2570 5660	2470 5440	2350 5180
									4 58	2880 6340	3750 8260	2960 6520	2740 6040	2630 5790	2500 5510
270/95 R 44 (11.2 R 44)	142 D 145 A8	W9 W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	35 44	71.2 157	2.8 41	2330 5130	3050 6720	2410 5310	2220 4890	2130 4690	2030 4470
									3.6 52	2700 5950	3530 7780	2780 6120	2570 5660	2470 5440	2350 5180
									4 58	2880 6340	3750 8260	2960 6520	2740 6040	2630 5790	2500 5510
									4.4 64	3050 6720	3980 8770	3140 6920	2900 6390	2780 6120	2650 5840
340/85 R 46	147 D 150 A8	W11 W12	343 13.5	1746 68.7	816 32.1	5310 209.0	38.5 58.5	94 207.2	2.8 41	3050 6720	3980 8770	3140 6920	2900 6390	2780 6120	2650 5840
									3.2 46	3300 7270	4310 9490	3400 7490	3140 6920	3010 6630	2870 6320
									3.6 52	3540 7800	4610 10150	3640 8020	3370 7420	3230 7110	3075 6770

R 46

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						Field	10 6	25 16	40 25	50 31	65 40
			mm in	mm in						bar psi	Maximum Load		kg lbs		

R 46	380/90 R 46 (14.9 R 46)	159 D 162 A8/B	W11 W12 W13	380 15.0	1852 72.9	864 34.0	5466 215.2	44.5 56	139 306.5	3.4 49	4580 10090	5970 13150	4720 10400	4360 9600	4180 9210	3980 8770
										3.6 52	4740 10440	6180 13610	4880 10750	4510 9930	4330 9540	4120 9070
										3.8 55	4890 10770	6380 14050	5040 11100	4650 10240	4460 9820	450 9360
										4.0 58	5030 11080	6560 14450	5180 11410	4750 10472	4590 10110	4375 9640
	380/90 R 46 (14.9 R 46)	165 A8/B	W11 W12 W13	380 15.0	1852 72.9	864 34.0	5466 215.2	44 56	146 322	3.5 51	4910 10810	6410 14120	5120 11280	4270 9410	4270 9410	-
										4 58	5310 11700	6930 15260	5540 12200	4620 10180	4620 10180	-
										4.4 64	5620 12380	7340 16170	5870 12930	4890 10770	4890 10770	-
										4.8 70	5920 13040	7730 17030	6180 13610	5150 11340	5150 11340	-
	270/95 R 46	141 D 144 A8	W9 W8 W10	275 10.8	1682 66.2	790 31.1	5126 201.8	35 44	72 158	2.8 41	2400 5290	3140 6920	2480 5460	2290 5040	2190 4820	2090 4600
										3.6 52	2780 6120	3630 8000	2870 6320	2650 5840	2540 5590	2420 5330
										4 58	2960 6520	3860 8500	3050 6720	2820 6210	2700 5950	2575 5670
	300/95 R 46 (12.4 R 46)	143 D 146 A8	W9 W10	300 11.8	1738 68.4	817 32.1	5155 203	36 45	87 191	2.4 35	2470 5440	3230 7110	2550 5620	2370 5220	2260 4980	2150 4740
										2.8 41	2700 5950	3530 7780	2780 6120	2590 5700	2470 5440	2350 5180
										3.2 46	2920 6430	3810 8390	3010 6630	2790 6150	2670 5880	2540 5590
										3.6 52	3130 6890	4090 9010	3230 7110	3000 6610	2860 6300	2725 6000
	300/95 R 46 (12.4 R 46)	148 D 151 A8	W9 W10	300 11.8	1738 68.4	817 32.2	5155 203	36 45	88 194	2.4 35	2690 5930	3510 7730	2770 6100	2560 5640	2460 5420	2340 5150
										2.8 41	2940 6480	3840 8460	3030 6670	2800 6170	2690 5930	2560 5640
										3.6 52	3400 7490	4440 9780	3510 7730	3240 7140	3110 6850	2960 6520
										4 58	3620 7970	4730 10420	3730 8220	3450 7600	3310 7290	3150 6940

These are tubeless tires



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed		kmph mph			
			SW	OD						Field	10 6	25 16	40 25	50 31	65 40
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs		bar psi	Maximum Load		kg lbs		

R 48	230/95 R 48 (9.5 R 48)	136D 139A8	W7 W8	228 8.97	1657 65.23	785 30.9	5049 198.7	33 41	63 138	2.8 41	2090 4600	2730 6010	2160 4760	1990 4380	1910 4210	1820 4010
										3.2 46	2270 5000	2960 6520	2330 5130	2160 4760	2070 4560	1970 4340
										3.6 52	2430 5350	3170 6980	2500 5510	2310 5090	2220 4890	2110 4650
										4 58	2580 5680	3360 7400	2650 5840	2450 5400	2350 5180	2240 4930
	270/95 R 48 (11.2 R 48)	142D 145A8	W9 W8 W10	275 10.83	1733 68.23	816 32.13	5281 207.9	35 44	72 158	2.4 35	2390 5260	3120 6870	2460 5420	2280 5020	2180 4800	2080 4580
										2.8 41	2620 5770	3420 7530	2700 5950	2500 5510	2390 5260	2280 5020
										3.2 46	2840 6260	3710 8170	2930 6450	2700 5950	2590 5700	2470 5440
										3.6 52	3050 6720	3980 8770	3140 6920	2900 6390	2780 6120	2650 5840
	340/85 R 48 (13.6 R 48)	148D 151A8	W12 W11	343 13.5	1797 70.7	841 33.1	5476 215.5	38 48	102 224	2.4 35	2860 6300	3740 8240	2950 6500	2730 6010	2610 5750	2490 5480
										2.8 41	3130 6890	4080 8990	3220 7090	2980 6560	2860 6300	2720 5990
										3.2 46	3380 7440	4410 9710	3480 7670	3220 7090	3090 6810	2940 6480
										3.6 52	3620 7970	4730 10420	3730 8220	3450 7600	3310 7290	3150 6940

These are tubeless tires



TRACTOR BIAS



FARMAX R1

FEATURE

- Triple angle lug

BENEFIT

- Enhanced traction and roadability

FEATURE

- Reinforced carcass

BENEFIT

- Longer service life

FEATURES

- High center lug overlap
- Tie bar

BENEFIT

- Improved stability



FARMAX R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity	
					SW	OD						Max Speed	Max Load
					mm in	mm in						kmph mph	kg lbs
8.3-24	8	TT	105 A8	W7	209 8.2	994 39.1	465 18.3	2982 117.4	29 37	21 46	3.1 45	30 19	925 2039
9.5-24	8	TT	112 A8	W8	241 9.5	1050 41.3	491 19.3	3150 124.0	29 37	26 58	2.8 41	30 19	1120 2469
11.2-24	8	TT	116 A8	W10	282 11.1	1103 43.4	516 20.3	3309 130.3	30 38	32 71	2.4 35	30 19	1250 2756
12.4-24	8	TT	121 A8	W11	307 12.1	1159 45.6	542 21.4	3477 136.9	33 42	34 75	2.3 33	30 19	1415 3120
13.6-24	8	TT	122 A8	W12	345 13.6	1210 47.6	560 22.0	3555 140.0	36 45	45 99	1.9 28	30 19	1500 3300
14.9-24	8	TT	128 A8	W13	402 15.8	1275 50.2	597 23.5	3825 150.6	35 44	48 107	1.8 26	30 19	1800 3968
16.9-24	8	TT	133 A8	W15L	426 16.8	1330 52.4	622 24.5	3990 157.1	37 47	58 129	1.7 25	30 19	2040 4497
18.4-26	12	TT	146 A8	W16L	492 19.4	1480 58.3	693 27.3	4440 174.8	37 47	86 191	2.3 33	30 19	3000 6614
11.2-28	8	TT	118 A8	W10	295 11.6	1205 47.4	564 22.2	3615 142.3	32 40	34 75	2.5 36	30 19	1320 2910
12.4-28	8	TT	123 A8	W11	323 12.7	1258 49.5	589 23.2	3774 148.6	34 43	46 101	2.4 35	30 19	1550 3417



Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity	
					SW	OD						Max Speed	Max Load
					mm in	mm in						kmph mph	kg lbs
13.6-28	8	TT	125 A6	W12	343 13.5	1310 51.6	613 24.1	3930 154.7	37 47	52 116	2 29	30 19	1650 3638
14.9-28	8	TT	130 A6	W13	386 15.2	1375 54.1	644 25.3	4125 162.4	35 44	58 128	1.8 26	30 19	2070 4564
16.9-28	12	TT	143 A6	W15L	429 16.9	1435 56.5	672 26.4	4305 169.5	35 43	74 162	2.4 35	30 19	2725 6008
16.9-30	10	TT	140 A6	W15L	440 17.3	1495 58.9	700 27.5	4485 176.6	37 47	79 175	2 29	30 19	2455 5412
18.4-30	12	TT	149 A6	W16L	465 18.3	1564 61.6	732 28.8	4692 184.7	38 47	89 195	2.3 33	30 19	3250 7165
18.4-34	8	TT	142 A6	W16L	465 18.3	1650 65.0	772 30.4	4950 194.9	37 47	95 209	1.4 20	30 19	2650 5842
	12	TT	150 A6						37 47	95 209	2.3 33	30 19	3450 7606
13.6-36	8	TT	129 A6	W12	350 13.8	1535 60.4	718 28.3	4605 181.3	35 44	55 122	2 29	30 19	1855 4090
13.6-38	8	TT	131 A6	W12	350 13.8	1585 62.4	742 29.2	4755 187.2	35 44	66 146	2 29	30 19	1950 4299
15.5-38	8	TT	133 A6	W14	400 15.7	1577 62.1	738 29.1	4731 186.3	33 42	72 160	1.8 26	30 19	2060 4542
	10	TT	137 A6						33 42	72 160	2.3 33	30 19	2300 5071
16.9-38	8	TT	141 A6	W15L	429 16.9	1685 66.3	789 31.0	5055 199.0	37 47	83 183	1.7 25	30 19	2575 5677
	10	TT	143 A6						37 47	83 183	2.0 29	30 19	2725 6008
18.4-38	8	TT	143 A6	W16L	465 18.3	1750 68.9	819 32.2	5250 206.7	37 47	103 227	1.4 20	30 19	2725 6008
	12	TT	152 A6						37 47	103 227	2.3 33	30 19	3550 7826



FARMAX F2

FEATURE

- 3 rib design with solid center rib

BENEFIT

- Easy steering

FEATURE

- Strong nylon casing


BENEFIT

- Durability and stability



FARMAX F2

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity	
					SW	OD						Max Speed	Max Load
					mm in	mm in						kmph mph	kg lbs
5.00-15	4	TT	73 A6	4.00E	140 5.5	655 25.7	307 12.0	1965 77.3	10 13	7 16	2.8 41	30 19	365 805
5.50-16	6	TT	86 A6	4.00E	150 5.9	710 27.9	332 13.0	2130 83.8	12 15	8 18	3.7 54	30 19	530 1170
6.00-16	6	TT	88 A6	4.50E	165 6.9	735 28.9	344 13.5	2205 86.8	17 21	10 21	3.4 49	30 19	560 1235
6.50-16	6	TT	91 A6	4.50E	175 6.8	760 29.9	356 14.0	2280 89.7	17 21	11 24	3.1 45	30 19	615 1355
7.50-16	8	TT	103 A6	5.50F	205 8.0	805 31.6	377 14.8	2415 95.0	20 25	17 37	3.7 54	30 19	875 1930
10.00-16	8	TT	115 A6	W8	285 11.2	910 35.8	426 16.7	2730 107.4	27 34	26 57	2.8 41	30 19	1215 2680
11.00-16	8	TT	118 A6	W10	326 12.8	972 38.2	455 17.9	2916 114.8	27 34	29 64	2.5 36	30 19	1320 2910
7.50-18	8	TT	106 A6	5.50F	205 8.0	860 33.8	402 15.8	2580 101.5	20 25	18 39	3.7 54	30 19	950 2095
4.00-19	4	TT	72 A6	3.00D	112 4.4	712 28.0	333 13.1	2136 84.0	10 13	6 13	3.4 49	30 19	355 785
7.50-20	8	TT	108 A6	5.50F	205 8.0	914 35.9	428 16.8	2742 107.9	20 25	18 40	3.4 49	30 19	1030 2270

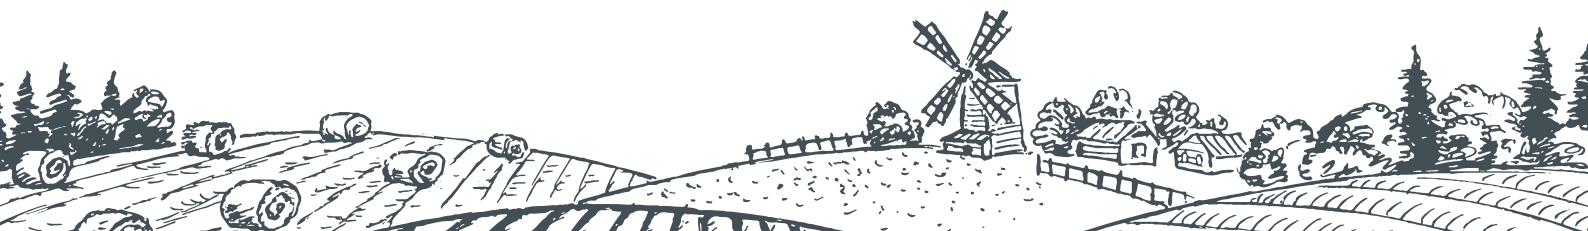

FARMAX F2M

FEATURE

- Multi-rib design

BENEFIT

- Easy steering

FEATURE

- Cut-resistant compound

BENEFIT

- Improved tire life



FARMAX F2M

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity	
					SW	OD						Max Speed	Max load
					mm in	mm in						kmph mph	kg lbs
9.5L-15 SL	8	TL	102 A8	7.0	241 9.5	782 30.8	352 13.9	2346 92.4	16 20	16 35	3.3 48	40 25	850 1875
11L-15 SL	8	TL	106 A8	8.0 LB	279 11.0	813 32.0	366 14.4	2439 96.0	20 25	20 44	3.0 44	40 25	950 2095
10.00-16 SL	8	TL	110 A8	W8L	274 10.8	894 35.2	402 15.8	2682 105.6	20 25	21 46	3.0 44	40 25	1060 2335
11.00-16 SL	8	TL	114 A8	W8L	315 12.4	967 38.1	435 17.1	2901 114.2	21 26	27 58	2.8 40	40 25	1180 2600



FLOTATION



FLOATMAX FT AG RADIAL

FEATURES

- Directional lug

BENEFITS

- Superior traction

FEATURES

- Robust center blocks

BENEFITS

- Better stability & roadability



FEATURE

- Higher rubber mass

BENEFIT

- Longer life

FEATURE

- Rounded shoulder

BENEFIT

- Lesser damage to soil & crop


FEATURE

- Wider & flatter crown

BENEFIT

- Better floating characteristics

*CTR-Low Compaction, High Traction, High Roadability

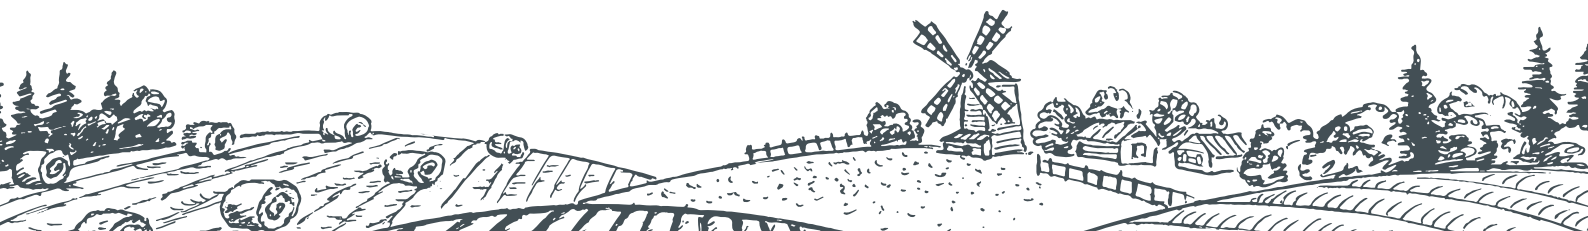

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Speed kmph mph					
			SW	OD						Static	10 6	30 19	40 25	50 31	65 40
			mm in	mm in						bar psi	Recommended Load		kg lbs		

FLOATMAX FT

R 22.5

560/45 R 22.5	152 D	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	19 24	87 192	1.2 17	4030 8880	3150 6940	2640 5810	2380 5240	2120 4670	1750 3850
									1.6 23	4760 10480	3730 8220	3130 6890	2820 6210	2500 5510	2070 4560
									2.4 35	6050 13330	4730 10420	3970 8740	3580 7890	3180 7000	2630 5790
									2.8 41	6620 14580	5180 11410	4350 9580	3920 8630	3480 7670	2880 6340
									3.6 52	7680 16920	6010 13240	5040 11100	4540 10000	4040 8900	3340 7360
									4 58	8170 18000	6390 14070	5360 11810	4830 10640	4300 9470	3550 7820
560/60 R 22.5	161 D	AG16.00	543 21.4	1244 49	561 22.1	3810 150	25 31	117.5 259	1.2 17	5270 11610	4120 9070	3460 7620	3110 6850	2770 6100	2290 5040
									1.6 23	6230 13720	4880 10750	4090 9010	3690 8130	3280 7220	2710 5970
									2.4 35	7910 17420	6190 13630	5190 11430	4680 1030	4160 9160	3440 7580
									2.8 41	8650 19050	6770 14910	5680 12510	5110 11260	4550 10020	3760 8280
									3.6 52	10010 22050	7830 17250	6570 14470	5920 13040	5260 11590	4350 9580
									4 58	10640 23440	8330 18350	6980 15370	6290 13850	5600 12330	4625 10190
600/50 R 22.5	159 D	AG20.00	611 24.1	1172 46.1	532 20.9	3479 137	25 31.5	114 251.3	1.2 17	4970 10950	3890 8570	3260 7180	2940 6480	2610 5750	2160 4760
									1.6 23	5890 12970	4610 10150	3870 8520	3480 7670	3100 6830	2560 5640
									2.4 35	7450 16410	5830 12840	4890 10770	4410 9710	3920 8630	3240 7140
									2.8 41	8170 18000	6390 14070	5360 11810	4830 10640	4300 9470	3550 7820
									3.6 52	9450 20810	7400 16300	6210 13680	5590 12310	4970 10590	4110 9050
									4 58	10060 22160	7880 17360	6610 14560	5950 13110	5290 11650	4375 9640
600/55 R 26.5	165 D	AG20.00	620 24.4	1336 52.6	608 24	4050 159.5	26.5 33.4	141 312	1.2 17	5840 12860	4570 10070	3840 8460	3450 7600	3070 6760	2540 5590
									1.6 23	6920 15240	5420 11940	4550 10020	4090 9010	3640 8020	3010 6630
									2.4 35	8790 19360	6880 15150	5770 12710	5200 11450	4620 10180	3820 8410
									2.8 41	9610 21170	7520 16560	6310 13900	5680 12510	5060 11150	4180 9210
									3.6 52	11130 24520	8710 19190	7310 16100	6580 14490	5860 12910	4840 10660
									4 58	11850 26100	9270 20420	7780 17140	7000 15420	6230 13720	5150 11340

R 26.5

These are tubeless tires

FLOTATION T 422

FEATURES

- Tough nylon casing
- Strong bead bundle

BENEFIT

- High load carrying capability



FEATURE

- Rounded shoulder

BENEFIT


- Reduced soil disturbance

FEATURE

- Larger volume and footprint


BENEFIT

- Reduced compaction

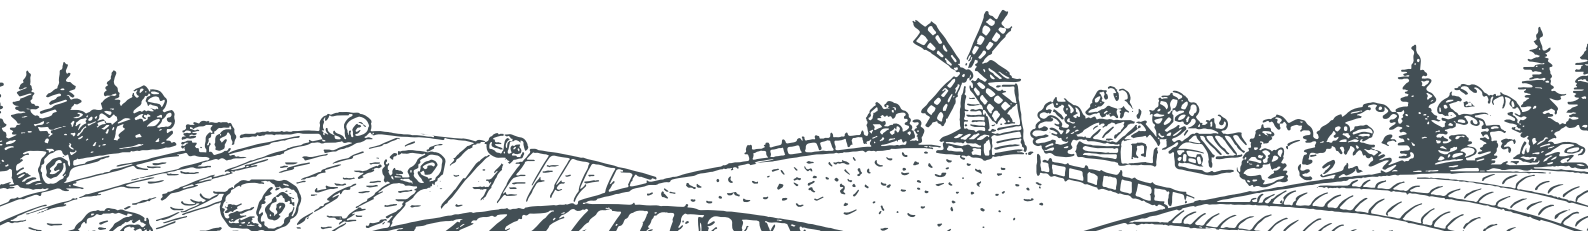

FLOTATION T 422

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD						Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kmph mph	Free Rolling kg lbs	Drive Wheel kg lbs
500/50-17	16	TL	152/149 A8/B	140 / 136 A8/B	16.00DC	503 20	932 37	436 17	2796 110	21 26	52 116	3.2 46	40 25	3550 7820	2500 5510
	18	TL	157/154 A8/B	145/141 A8/B						21 26	54 117	4 58	40 25	4125 9095	2900 6395
550/45-22.5	12	TL	157 A8 154 B	141 A8 137 B	16.00DC	550 22	1070 42	470 19	3205 126	25 31	75 166	2.1 30	40 25	3650 8045	2575 5675
	16	TL	159 A8 156 B	147 A8 143 B						25 31	77 170	2.8 41	40 25	4375 9645	3075 6780
	20	TL	166 A8 162 B	154 A8 150 B						25 31	81 179	4 58	40 25	5300 11685	3750 8265
500/60-22.5	12	TL	157 A8 154 B	145 A8 142 B	16.00DC	500 20	1170 46	510 20	3490 137	25 31	81 178	2.4 35	40 25	4125 9095	2900 6395
	16	TL	163 A8 159 B	151 A8 148 B						25 31	83 182	3.2 46	40 25	4875 10750	3450 7605
550/60-22.5	12	TL	160 A8 156 B	148 A8 144 B	16.00DC	550 22	1240 49	540 21	3725 147	25 31	89 197	2.3 33	40 25	4500 9920	3150 6945
	16	TL	168 A8 163 B	155 A8 151 B						25 31	93 205	3 44	40 25	5600 12345	3875 8540
600/50-22.5	12	TL	159 A8 156 B	147 A8 144 B	20.00DC	600 24	1170 46	510 20	3498 138	24 30	90 197	2 29	40 25	4375 9645	3075 6780
	16	TL	165 A8 161 B	153 A8 149 B						24 30	94 207	2.6 38	40 25	5150 11355	3650 8045
600/55-22.5	12	TL	164 A8 160 B	151 A8 148 B	20.00DC	600 24	1238 49	540 21	3715 146	24 31	97 215	2 29	40 25	5000 11025	3450 7605
	16	TL	169 A8 166 B	156 A8 153 B						24 30	105 232	2.6 38	40 25	5800 12785	4000 8815
600/55-26.5	12	TL	165 A8 161 B	153 A8 149 B	20.00DC	600 24	1333 53	585 23	3986 157	25 31	108 237	2 29	40 25	5150 11355	3640 8045
	16	TL	170 A8 167 B	159 A8 156 B						25 31	117 257	2.6 38	40 25	6000 13230	4375 9645
700/40-22.5	12	TL	160 A8 157 B	148 A8 144 B	24.00DC	700 28	1170 46	510 20	3535 139	24 31	100 220	2 29	40 25	4500 9920	3150 6945
	16	TL	166 A8 162 B	154 A8 150 B						24 30	108 239	2.2 32	40 25	5300 11685	3750 8265
700/50-22.5	12	TL	168 A8 164 B	156 A8 153 B	24.00DC	700 28	1245 49	550 22	3710 146	24 30	107 237	2.2 32	40 25	5600 12345	4000 8815
	16	TL	174 A8 170 B	162 A8 158 B						24 30	116 257	2.8 41	40 25	6700 14770	4750 10470
700/50-26.5	12	TL	169 A8 165 B	157 A8 154 B	24.00DC	700 28	1333 53	585 23	3986 157	24 30	123 270	1.8 26	40 25	5800 12785	4125 9095
	16	TL	174 A8 170 B	162 A8 158 B						24 30	132 292	2.4 35	40 25	6700 14770	4750 10470
800/45-26.5	12	TL	170 A8 167 B	158 A8 155 B	16.00DC	800 32	1343 53	585 23	4016 158	24 30	134 296	1.7 25	40 25	6000 13230	4250 9370
	16	TL	177 A8 173 B	164 A8 160 B						24 30	144 316	2.2 32	40 25	7300 16095	5000 11025

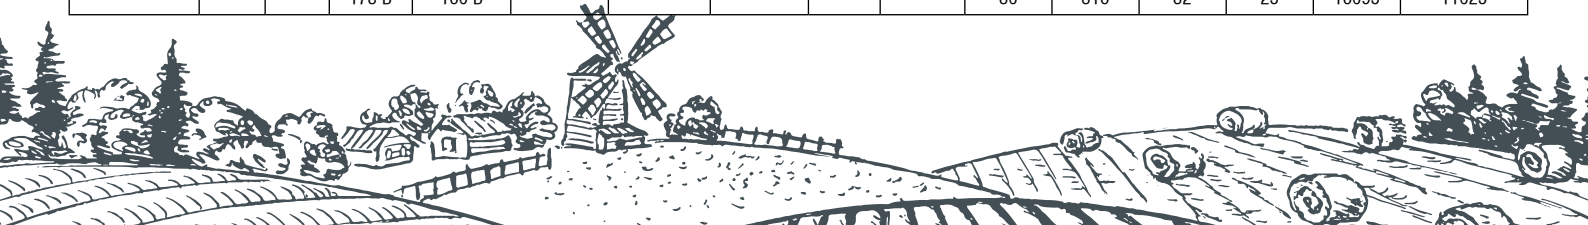

T 422 VALUE PRO



FEATURE

- Rounded shoulder

BENEFIT

- Reduced soil disturbance

FEATURE

- Larger volume & footprint

BENEFIT

- Reduced compaction

*Designed for free-rolling applications



T 422 VALUE PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD						Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in							Free Rolling	Drive Wheel
400/55-22.5	16	TL	152 A8 149 B	140 A8 136 B	13.00DC	400 15.7	1012 39.8	445 17.5	3135 123.4	17.5 31	49.3 108	4 58	50 30	3200 7055	2250 4960
500/45-22.5	16	TL	154 A8 150 B	142 A8 138 B	16.00DC	500 20	1045 41	470 19	3165 125	18.5 31	55 121	3.6 52.2	50 30	3350 7385	2360 5203
500/60-22.5	16	TL	163 A8 159 B	151 A8 148 B	16.00DC	500 20	1170 46	510 20	3490 137	25 31	77 170	3.2 46	40 25	4875 10750	3450 7605
550/45-22.5	16	TL	159 A8 156 B	147 A8 143 B	16.00DC	550 22	1070 42	470 19	3205 126	25 31	72 159	2.8 41	40 25	4375 9645	3075 6780
550/60-22.5	16	TL	168 A8 163 B	155 A8 151 B	16.00DC	550 21.7	1240 49	540 21	3725 147	25 31	85 187	3 44	40 25	5600 12345	3875 8540



TR 800



FEATURE

- Rounded shoulder

BENEFIT

- Reduced soil disturbance

FEATURE

- Larger volume & footprint

BENEFIT

- Reduced compaction

TR 800

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD						Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kmph mph	Free Rolling	Drive Wheel
400/60-15.5	14	TL	145 A8	132 A8	13.00	400	876	385	2575	17 21	32 70	3.6 52	40 25	2900 6395	2000 4410
	18	TL	149 A8	137 A8		15.7	34.5	15.2	101.4	17 21	36 80	4.5 65	40 25	3250 7165	2300 5070



FLOTATION PLUS



FEATURE

- Rounded shoulder

BENEFIT

- Reduced soil disturbance

FEATURE

- Larger volume & footprint


BENEFIT

- Reduced compaction

*Designed for steering and drive wheel applications

FLOTATION PLUS

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD						Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in						kmph mph	Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi		kg lbs	kg lbs
480/45-17	16	TL	146 A8	134 A8	16.00DC	490 19.3	866 34.1	405 16.0	2598 102.3	16 20	47 103	3.2 46	40 25	3000 6615	2120 4675
500/50-17	14	TL	149 A8	137 A8	16.00DC	500 19.7	950 37.4	445 17.5	2850 112.2	16 20	55 121	2.8 41	40 25	3250 7165	2240 4940

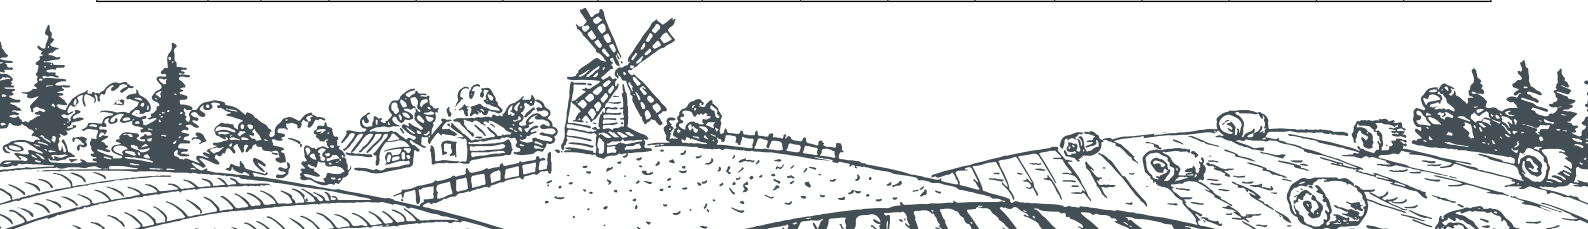

FLOTATION TX 440



FEATURE

- Rounded shoulder

BENEFIT

- Reduced soil disturbance

FEATURE

- Larger volume & footprint


BENEFIT

- Reduced compaction

*Designed for on and off road agricultural service

FLOTATION TX 440

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD						Max Speed	Max Load	
			Free Rolling	Drive Wheel										Free Rolling	Drive Wheel
500/60-22.5	16	TL	163 A8	151 A8	16.00DC	500 20	1170 46	510 20	3490 137	41 52	104 229	3.2 46	40 25	4875 10750	3450 7605
			159 B	148 B											
550/60-22.5	16	TL	166 A8	154 A8	16.00DC	550 22	1244 49	540 21	3725 147	40 50	119 262	2.8 41	40 25	5300 11685	3750 8265
			162 B	150 B											
600/50-22.5	16	TL	165 A8	153 A8	20.00DC	600 24	1170 46	510 20	3498 138	41 52	120 265	2.6 38	40 25	5150 11355	3650 8045
			161 B	149 B											
700/40-22.5	16	TL	166 A8	154 A8	24.00DC	700 28	1170 46	512 20	3535 139	41 52	133 293	2.2 32	40 25	5300 11685	3750 8265
			162 B	150 B											

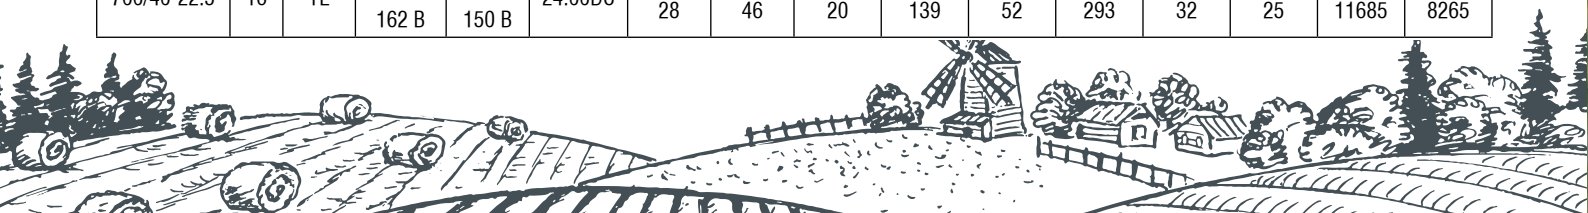

PIVOT IRRIGATION



IRROGATOR

FEATURE

- Strong nylon casing

BENEFIT

- Excellent stability and increased service life



FEATURE

- Optimized lug angle with lug overlap

BENEFIT

- Uniform wear

IRROGATOR

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity	
					SW	OD						Max Speed	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs
*11.2-24	4	TT	110 A6	W10	284 11.2	1105 43.5	517 20.4	3315 130.5	25 31	27 59	1.8 26	30 19	1060 2335
14.9-24	8	TT	123 A6	W13	398 15.7	1245 49.0	575 22.6	3660 144.1	28 35	45 99	1.4 20	30 19	1550 3410
11.2-38	6	TT	117 A6	W10	284 11.2	1445 56.9	685 27.0	4250 167.3	22 28	42 93	1.8 26	30 19	1285 2830

*This is a separate pattern from the one shown



IMPLEMENT



FARM IMPLEMENT I 1

FEATURES

- Wider tread
- High volume
- Low section design

BENEFIT

- Reduced compaction



FEATURES

- Wider tread
- High volume

BENEFIT

- Higher load carrying capacity



FARM IMPLEMENT I 1

Size	PR	Type	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load Capacity		
				SW	OD						Static	Max Speed	Max Load
				mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kg lbs	kmph mph	kg lbs
7.60-15 SL	10	TL	5.5	194 7.6	732 28.8	326 12.8	2145 84.4	7 9	12 25	4.3 62	2100 4630	50 31	1050 2315
9.5L-15 SL	8	TT	7.0	241 9.5	767 30.2	341 13.4	2247 88.5	7 9	13 28	3 44	2240 4940	50 31	1120 2470
	8	TL	7.0						14 31	3 44	2240 4940	50 31	1120 2470
	12	TT	7.0	241 9.5	767 30.2	341 13.4	2247 88.5	7 9	14 31	4.4 64	2900 6395	50 31	1450 3200
	12	TL	7.0						16 35	4.4 64	2900 6395	50 31	1450 3200
11L-15 SL	8	TT	8 LB	279 11.0	777 30.6	345 13.6	2331 91.8	8 10	15 33	2.5 36	2300 5070	50 31	1150 2540
	8	TL	8 LB						16 35	2.5 36	2300 5070	50 31	1150 2540
	10	TT	8 LB	279 11.0	777 30.6	345 13.6	2331 91.8	8 10	14 31	3 44	2640 5820	50 31	1320 2910
	10	TL	8 LB						15 33	3 44	2640 5820	50 31	1320 2910
	12	TT	8 LB	279 11.0	777 30.6	345 13.6	2331 91.8	8 10	16 36	3.6 52	2900 6390	50 31	1450 3200
	12	TL	8 LB						18 39	3.6 52	2900 6390	50 31	1450 3200
12.5L-15 SL	10	TT	10 LB	318 12.5	823 32.4	363 14.3	2411 94.9	9 11	18 40	3 44	3100 6835	50 31	1550 3420
	10	TL	10 LB						19 42	3 44	3100 6835	50 31	1550 3420
	12	TL	10 LB						22 48	3.6 52	3500 7715	50 31	1750 3860



FARM IMPLEMENT AWI 305

FEATURE

- Shoulder lugs are open and angled

BENEFIT

- Prevents skidding while turning



FEATURE

- Strong construction

BENEFIT

- Longer tire life

FEATURE

- Larger volume & footprint

BENEFIT

- Reduced compaction

FARM IMPLEMENT AWI 305

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load capacity	
			Free Rolling		SW	OD						Max Speed	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kmph mph	kgs lbs
10.0/75-15.3	12	TL	126 A8	9.0	264 10.4	770 30.3	347 13.7	2272 89.4	9 11	15 33	4.7 68	40 25	1700 3750
11.5/80-15.3	14	TL	139 A8	9.0	297 11.7	855 33.7	376 14.8	2485 97.8	9 11	19 41	4.75 69	40 25	2430 5355



FARM IMPLEMENT 404

FEATURES

- Multi rib
- Large air chamber

BENEFIT

- Reduced compaction and increased flotation



FEATURES

- Wide tread
- High volume

BENEFIT

- High load carrying capacity


FARM IMPLEMENT 404

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	NSD	Tire Wt.	Infl. Press.	Load capacity	
					SW	OD						Max Speed	Max Load
			Free Rolling		mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs
15/55-17	14	TL	141 A8	13.00	391 15.4	850 33.5	375 14.8	2492 98.1	12 15	24 53	3.7 54	40 25	2575 5675
500/50-17	18	TL	154 A8	16.00DC	500 19.7	945 37.2	415 16.3	2752 108.3	12 15	50 110	3.6 52	40 25	3750 8265





AGRO INDUSTRIAL

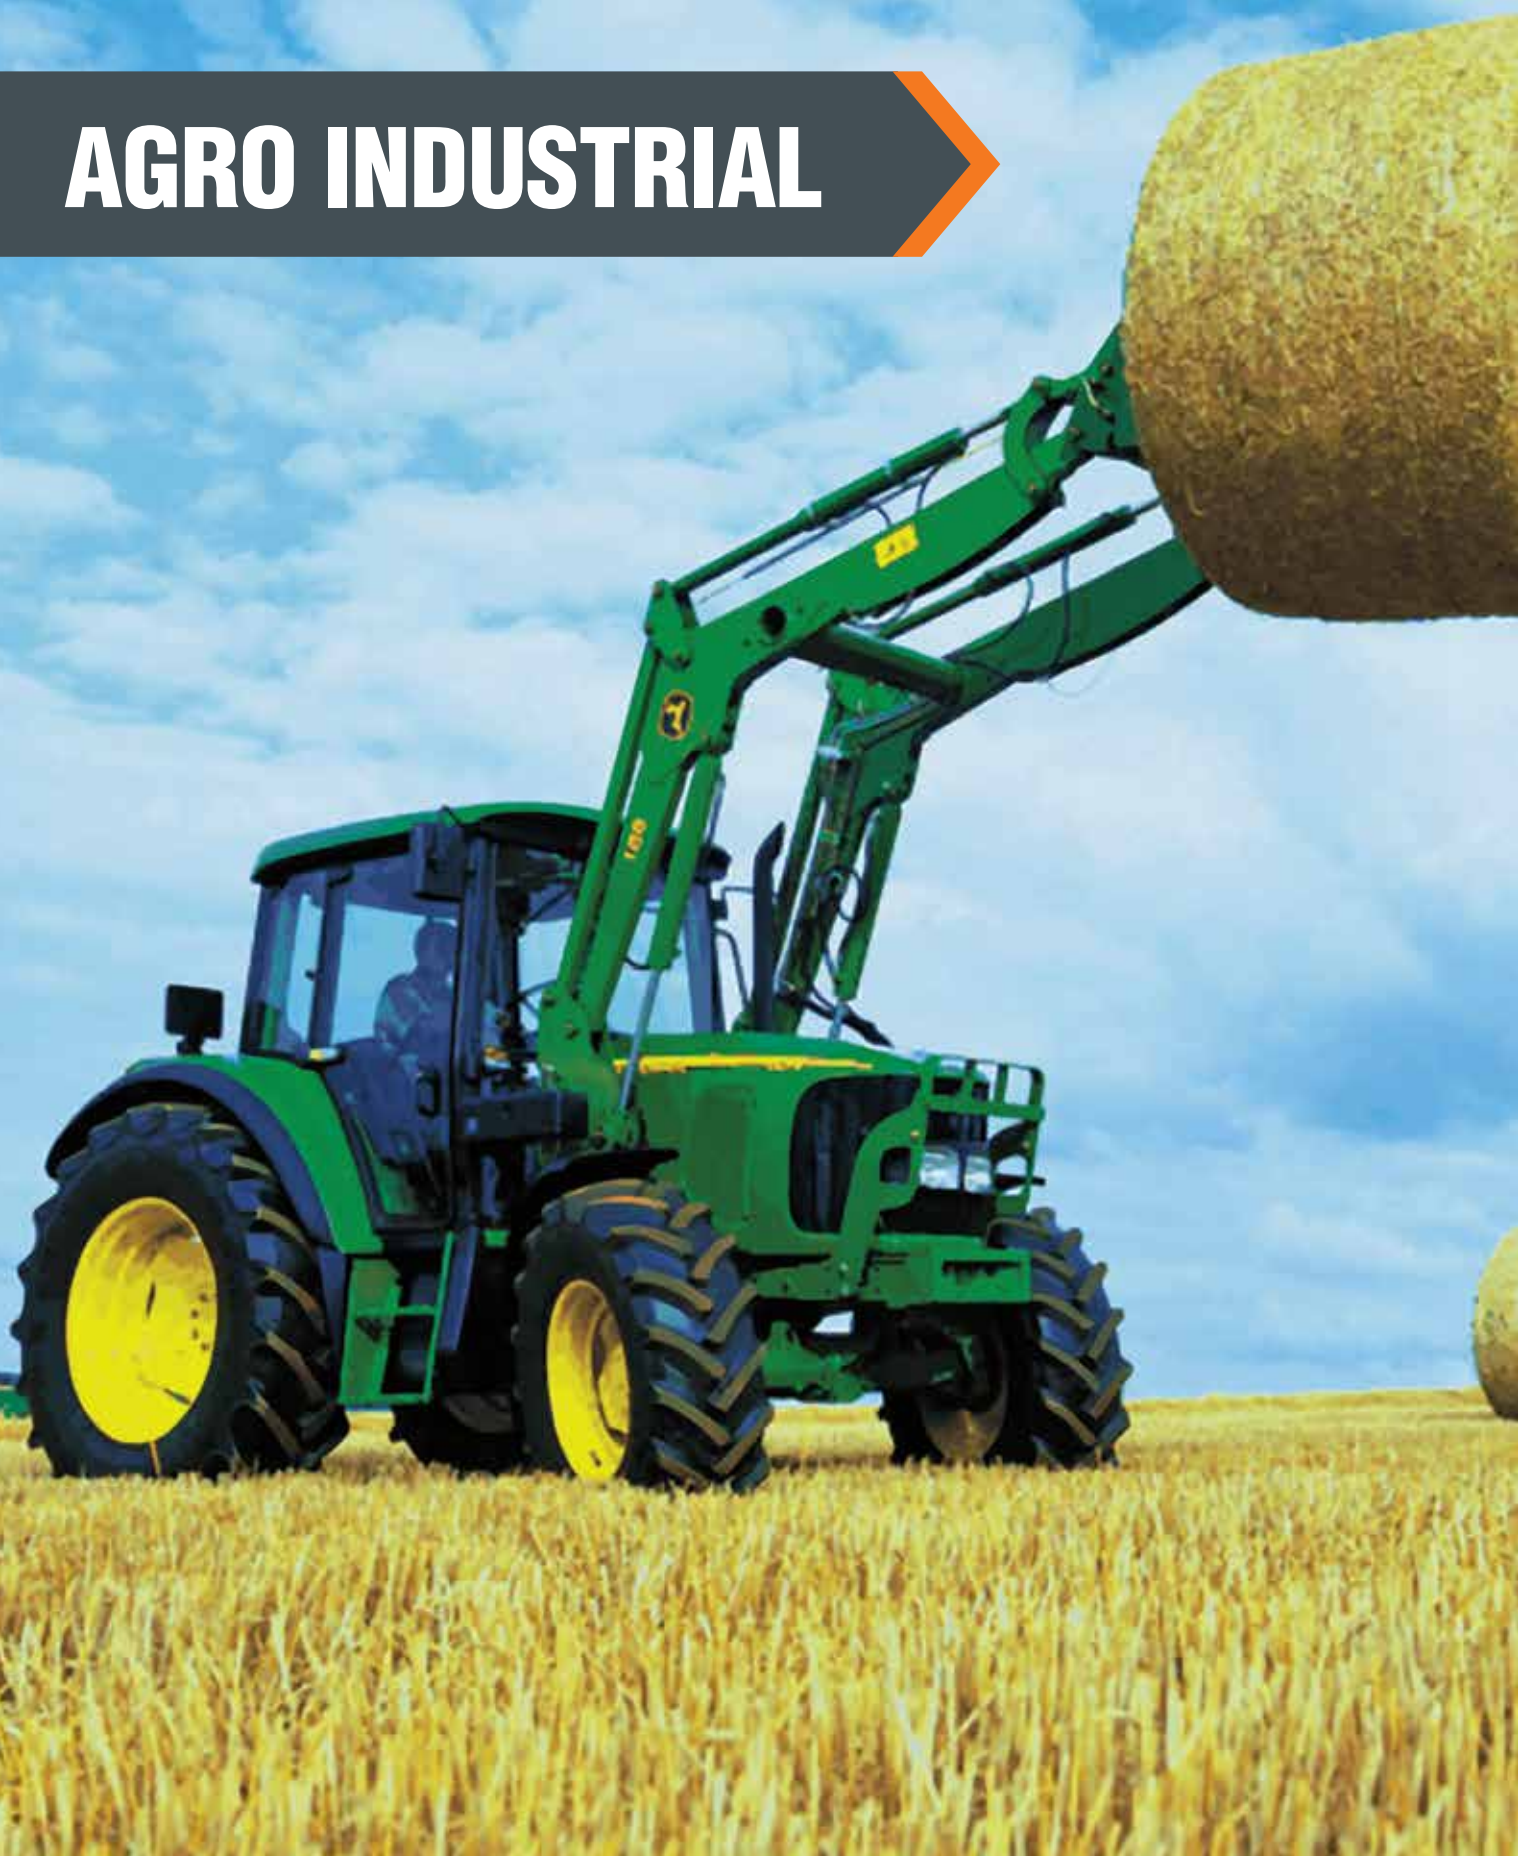

LIFT PRO

FEATURE

- Unique R1 pattern

BENEFIT

- Excellent traction

**FEATURE**

- Deep under tread

BENEFIT

- Improved puncture resistance

FEATURE

- Strong nylon casing and thick sidewall

BENEFIT

- High radial and lateral stability

*Designed for tele-handlers for agro-industrial use



LIFT PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	RCI	NSD	Tire Wt.	Infl. Press.	Load Capacity		
						SW	OD							Max Speed	Free Rolling	Drive Wheel
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in		mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs	kg lbs
15.5/80-24	16	TL	163 A6	151 A6	W13	395 15.5	1250 49.2	562 21.5	3650 143.7	38	37 47	74 163	4 58	30 19	4875 10745	3450 7600

Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Recommended load, kg (lbs)						Speed	kmph mph
										Speed kmph (mph)							
										Non-Cyclic Operations						Cyclic Operations	
			SW	OD						Static	10	20	30	40	50	10	15
									6		12	19	25	31	6	9	
mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi		Constand load			kg lbs		Recom. Load	kg lbs			

460/70 R 24	159 A8/B	W15L W16L	455 17.9	1254 49.4	566 22.3	3713 146	33 42	96 212	2.4	7430	4040	3520	3360	3230	3230	4850	4330
									35	16370	8900	7750	7400	7110	46835	10680	9540
									2.8	8140	4430	3860	3680	3540	3540	5310	4740
									41	17930	9760	8500	8110	7800	51330	11700	10440
									3.0	8490	4610	4020	3840	3690	3690	5540	4940
									44	18700	10150	8850	8460	8130	53505	12200	10880
									3.6	9450	5140	4480	4270	4110	4110	6170	5510
									52	20810	11320	9870	9410	9050	59595	13590	12140
									4	10060	5470	4770	4550	4375	4375	6560	5860
									58	22160	12050	10510	10020	9640	63437.5	14450	12910



MPT 602




FEATURE

- Wide open lug at shoulder

BENEFITS

- Excellent traction in all weather & service conditions
- Self-cleaning properties
- Resistant to side slip

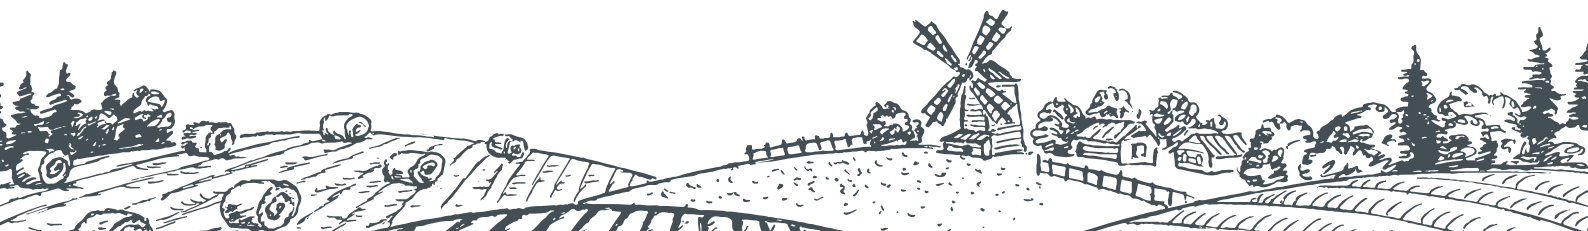

MPT 602

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	NSD	Tire Wt.	Infl. Press.	Load capacity	
					SW	OD							Max Speed	Max Load
					mm in	mm in	mm in	mm in		mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs
12.5-18	12	TL	134 D	11.0	325 12.8	990 39.0	455 17.9	2910 114.6	34	24 30	44 97	3.5 51	65 40	2120 4665
10.00-20	16	TT	146 B	7.5	280 11.0	1075 42.3	509 20.0	3255 128.1	36	21 26	42 93	7.5 109	50 31	3000 6610
12.5-20	12	TL	135 D	11.0	325 12.8	1042 41.00	480 18.9	3065 120.7	35	24 30	48 106	3.5 51	65 40	2180 4795
405/70-20 (16.0/70-20)	14	TL	148 D	13.0	405 15.9	1180 42.7	547 19.7	3470 125.6	36	24 30	42 92	3.5 51	65 40	3150 6930
405/70-24 (16.0/70-24)	14	TL	151 D	13.0	405 15.9	1186 46.5	547 21.5	3535 139.2	38	30 38	58 128	4 58	65 40	3450 7950



MPT 800

FEATURE

- Robust casing

BENEFIT

- Better lateral stability



FEATURE

- Superior tread compound

BENEFIT


- Cut & chip resistance

MPT 800

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in					kmph mph	kg lbs
405/70-20 (16.0/70-20)	14	TL	149 B	13.00	405 15.9	1098 43.2	505 19.8	3225 126.9	36	3.5 51	50 30	3250 7165
405/70-24 (16.0/70-24)	14	TL	152 B	13.00	405 15.9	1188 46.7	551 21.9	3490 137.4	38	4 58	50 30	3550 7825



SKID STEER

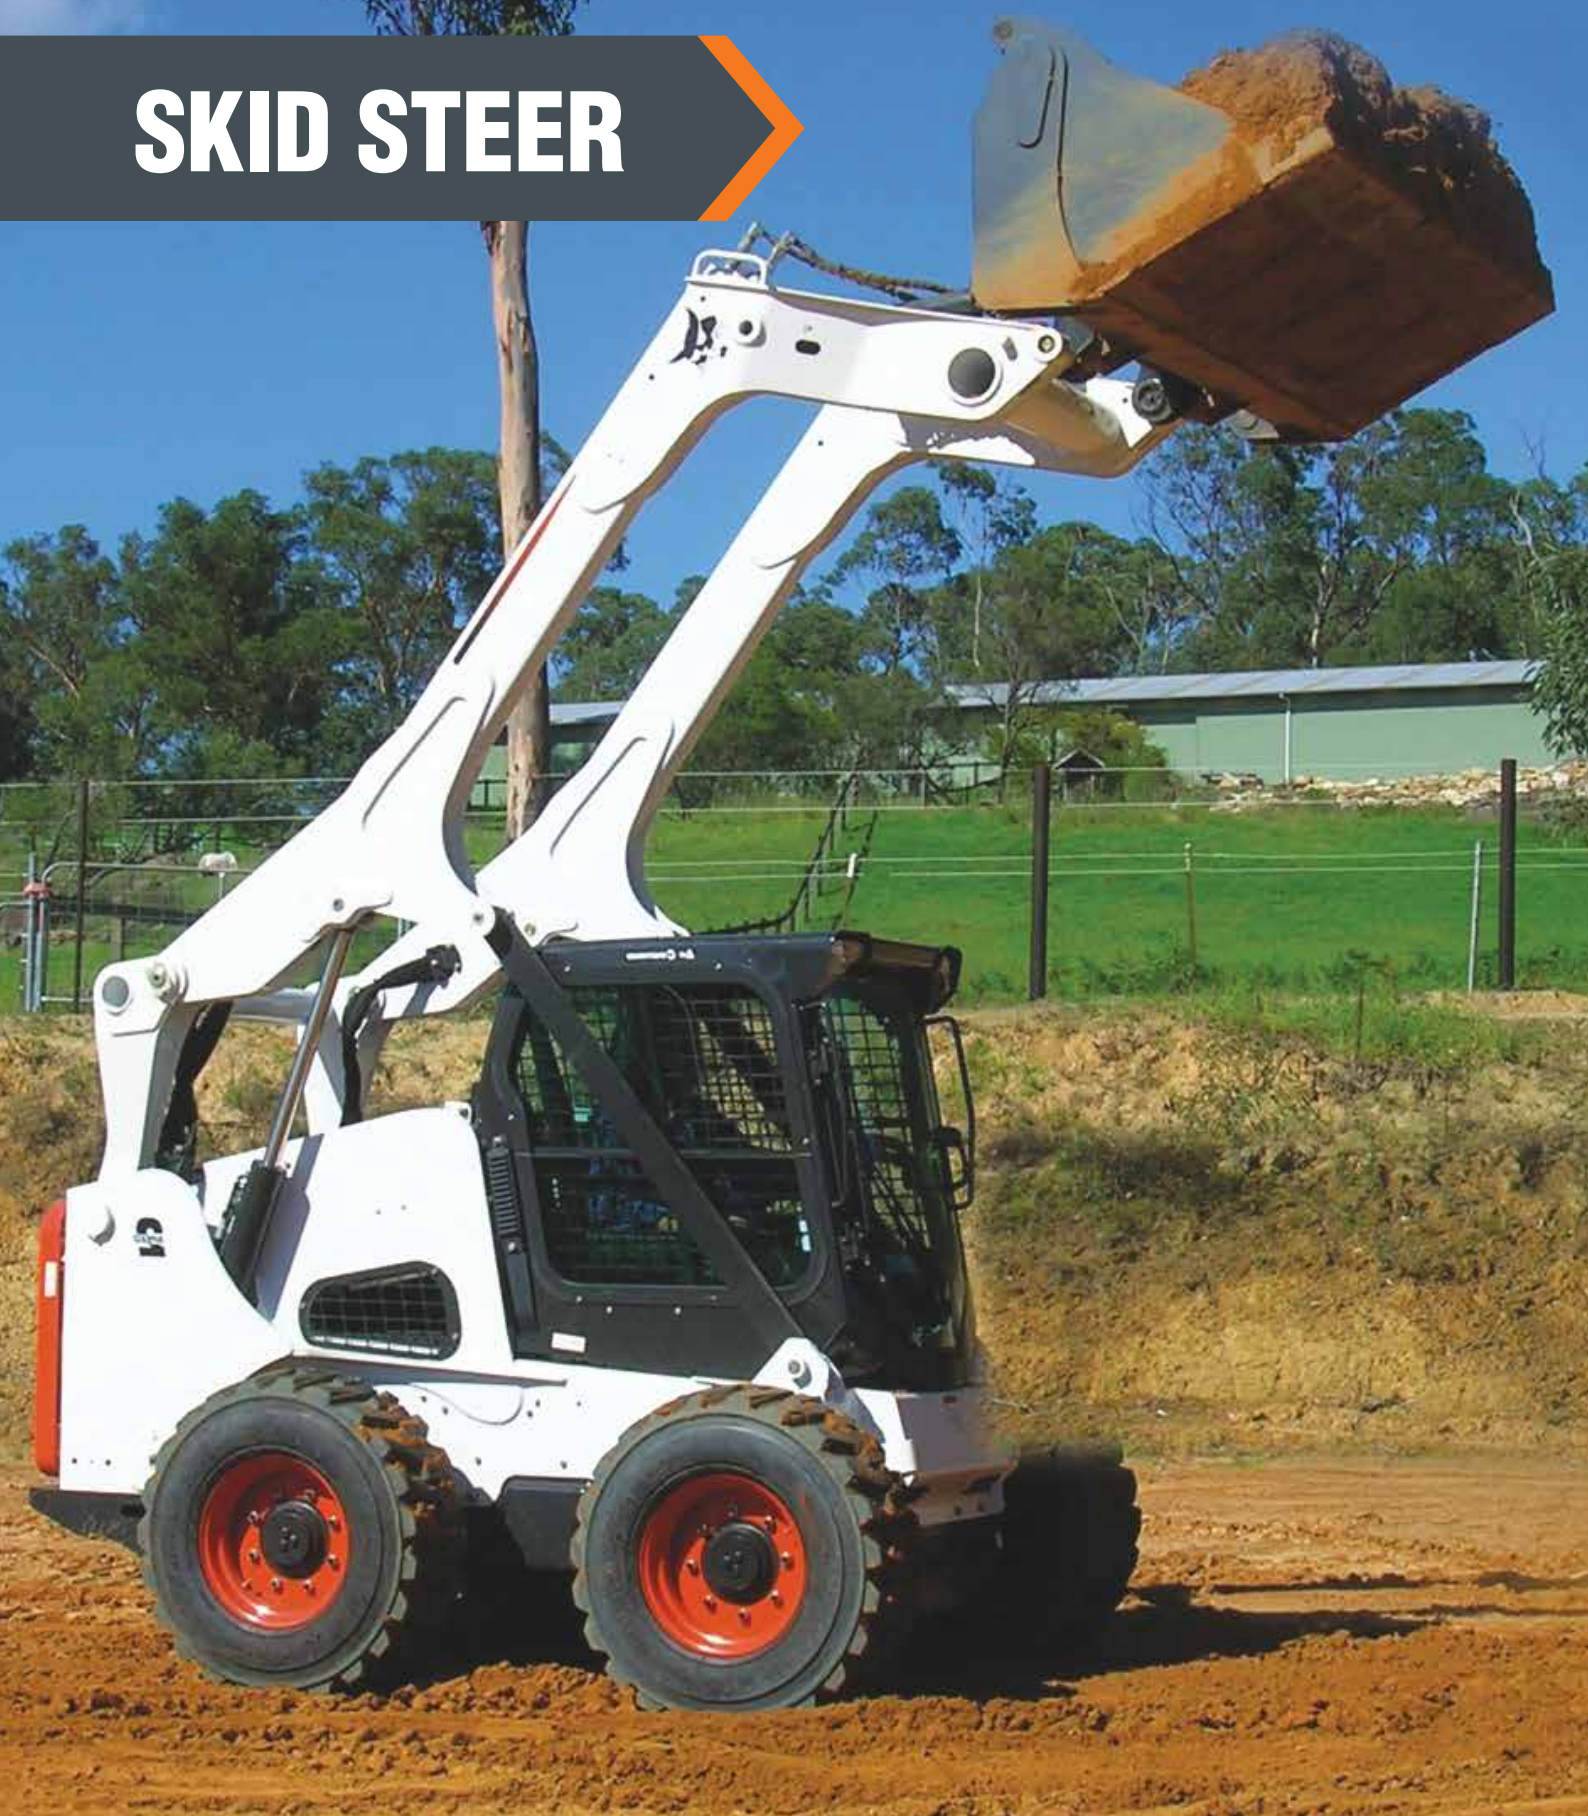

LOADER PRO

FEATURES

- Skid steer for industrial and construction applications
- Strong nylon casing
- Step down lugs
- Rim guard
- Abrasion resistant compounds
- Deeper tread depth
- Solid center lug with deep shoulders

BENEFITS

- Heavy duty service
- Excellent durability
- Self-cleaning
- Cut and chip resistant
- Reduces damage in side wall and rim flange area
- Excellent traction and puncture resistant



LOADER PRO

SIZE	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	NSD	Tire Wt.	Infl. Press.	Load capacity	
				SW	OD							Max Speed	Max Load
				mm in	mm in	mm in	mm in		mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs
10-16.5	10	TL	8.25	264 10.4	770 30.3	356 14.0	2296 90.4	29	17 21	22 49	5.2 75	10 6	2135 4710
12-16.5	12	TL	9.75	307 12.1	830 32.7	384 15.1	2475 97.4	31	18 23	31 68	5.5 80	10 6	2865 6320



LOADER PRO HD

FEATURES

- Skid steer for industrial and construction applications
- Strong nylon casing
- Step down lugs
- Rim guard
- Abrasion resistant compounds
- Deeper tread depth
- Solid center lug with deep shoulders

BENEFITS

- Heavy duty service
- Excellent durability
- Self cleaning
- Cut and chip resistant
- Reduces damage in side wall and rim flange area
- Excellent traction and puncture resistant



LOADER PRO HD

Size	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	NSD	Tire Wt.	Infl. Press.	Load capacity	
				SW	OD							Max Speed	Max Load
				mm in	mm in	mm in	mm in		mm 32 nds	kg lbs	bar psi	kmph mph	kg lbs
14-17.5	14	TL	10.5	350 13.7	930 36.6	430 16.9	2773 109.2	37	28 35	52 114	5.5 80	25 16	2830 6239
15-19.5	14	TL	11.75	400 15.7	1035 40.7	479 18.9	3086 121.5	35	28 35	62 137	4.8 70	25 16	3330 7341



GRIP X HD

FEATURES

- Multi-use tread pattern
- Deep tread
- Strong nylon casing
- Broad lugs
- Cut and chip resistant tread compound
- Rim guard


BENEFITS

- Heavy duty service
- Excellent durability
- Improved stability
- Reduces damage in side wall and rim flange area



GRIP X HD

Size	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	NSD	Tire Wt.	Infl. Press.	Load capacity	
				SW	OD							Max Speed	Max Load
				mm in	mm in	mm in	mm in		mm 32 nds	kg lbs	bar PSI	kmph mph	kg lbs
10-16.5	10	TL	8.25	265 10.4	800 31.5	365 14.0	2360 93.0	29	34 43	34 75	5.2 75	10 6	2135 4710
	12	TL	8.25	265 10.4	800 31.5	365 14.0	2360 93.0	29	34 43	35 77	6.2 90	10 6	2375 5235
12-16.5	12	TL	9.75	315 12.4	864 34.0	392 15.4	2537 99.9	31	34 43	44 100	5.5 80	10 6	2865 6320
	14	TL	9.75	315 12.4	864 34.0	392 15.4	2537 99.9	31	34 43	46 101	6.2 90	10 6	3075 6780

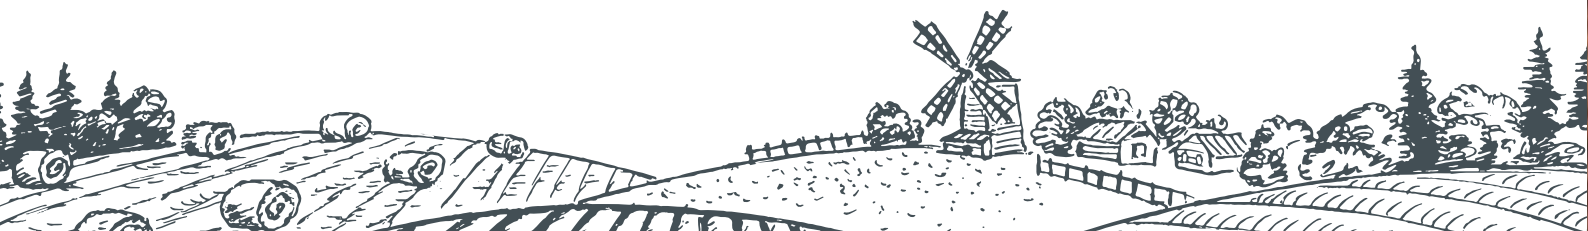

TIRE CARE AND USAGE MANUAL



GENERAL INFORMATION

CEAT Ag radial tires are designed for both off-road and on-road applications for equipment like Ag tractors, trailers, implements and harvesters. Factors such as improper selection, handling and driving habits can reduce tire life.

To obtain the longest service life from the tire, correct inflation pressure has to be maintained at all times. It is recommended to check the inflation pressure on a daily basis.

MOUNTING AND DEMOUNTING

Always practice correct mounting and dismounting procedures.

DIMENSIONS

All the dimensions and the tolerances in this catalog are based on nominal TRA and ETRTO standards.

QUALITY SYSTEMS AND CERTIFICATION

CEAT, an ISO 9001 certified company since 1994, is the first tire company in India to be certified with the most stringent quality certification of ISO/T5 16949: 2002 (QS 9000) from TUV.


The tires manufactured by CEAT are DOT, ECE and INMETRO certified.

QUALITY POLICY


We, at CEAT are committed to be customer-centric by consistently delivering excellent products and services at competitive prices.

It will be our endeavor to continuously improve all business processes and ensure conformity to the established quality systems.

We intend to accomplish this through constantly upgrading the skills of our employees.

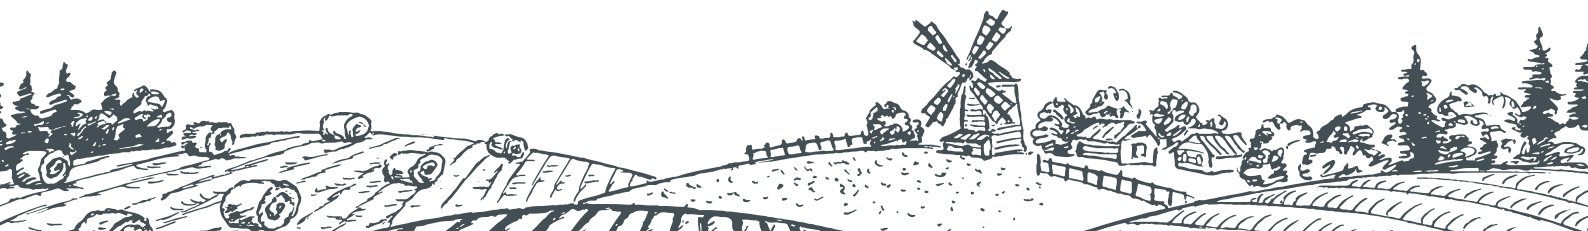

TIRE DESCRIPTION

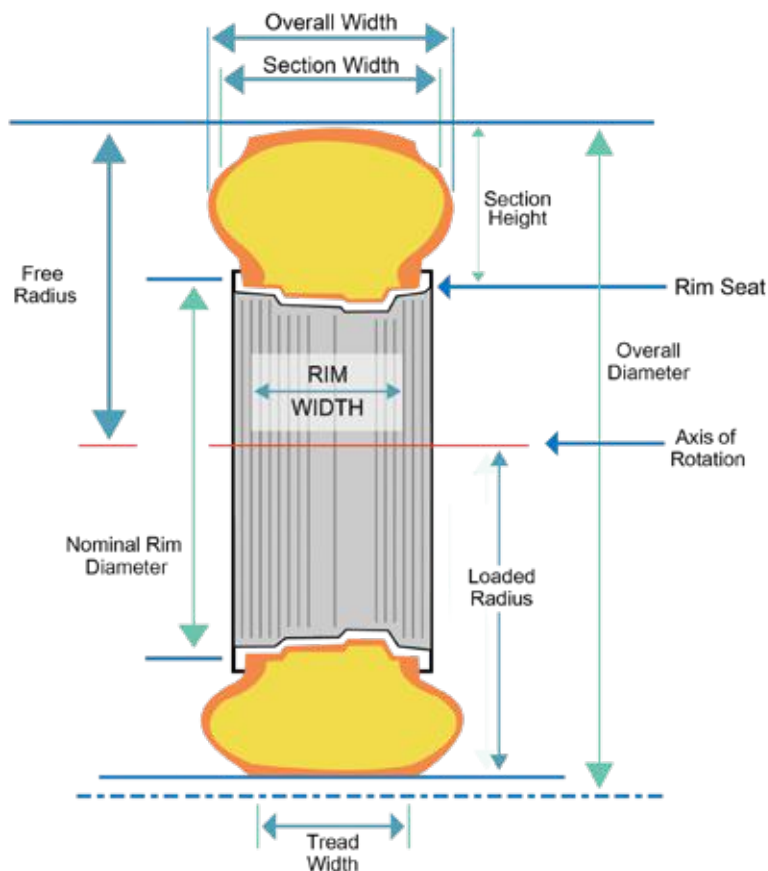

Section Height: The height of a new tire from the nominal rim diameter to the top of the tread.

Section Width: The width of a new tire including normal sidewalls, but not including protective side ribs, bars, or other decorations.

Overall Diameter: Twice the section height (unloaded) plus the nominal rim diameter.

Rim Width: The measurement on the inside of the rim between the two flanges.

Rim Diameter: The nominal rim diameter in inches.

Rolling Circumference: The distance an inflated and loaded tire will travel in one revolution.

Aspect Ratio: The ratio of the tire “section height” to “section width.”




TIRE NOMENCLATURE




440/65 R 24

RADIAL


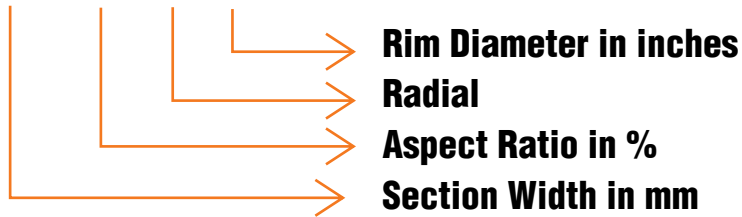


17.5 - 25



BIAS

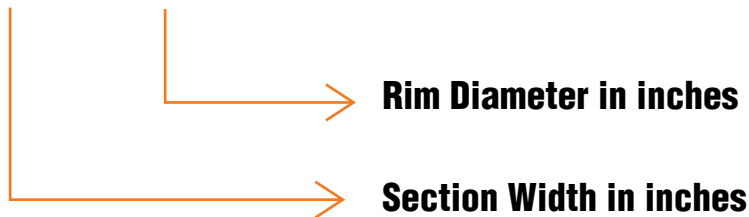

500/50 - 17

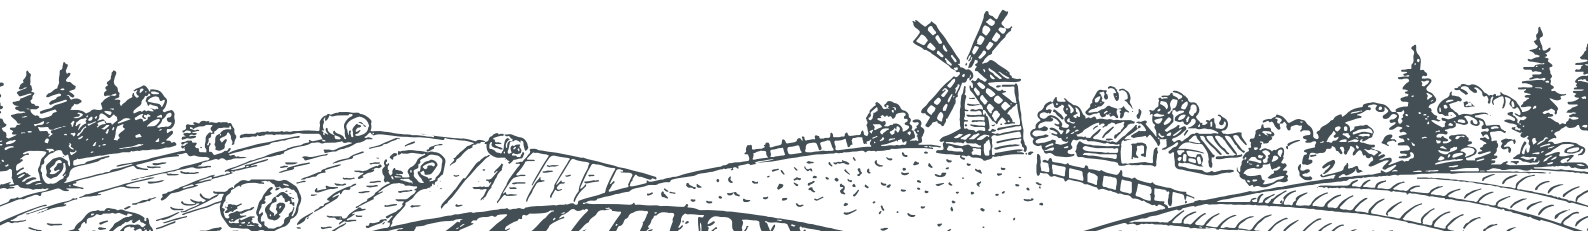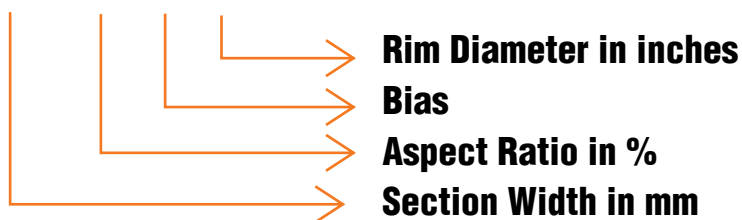

TIRE SIDEWALL MARKING

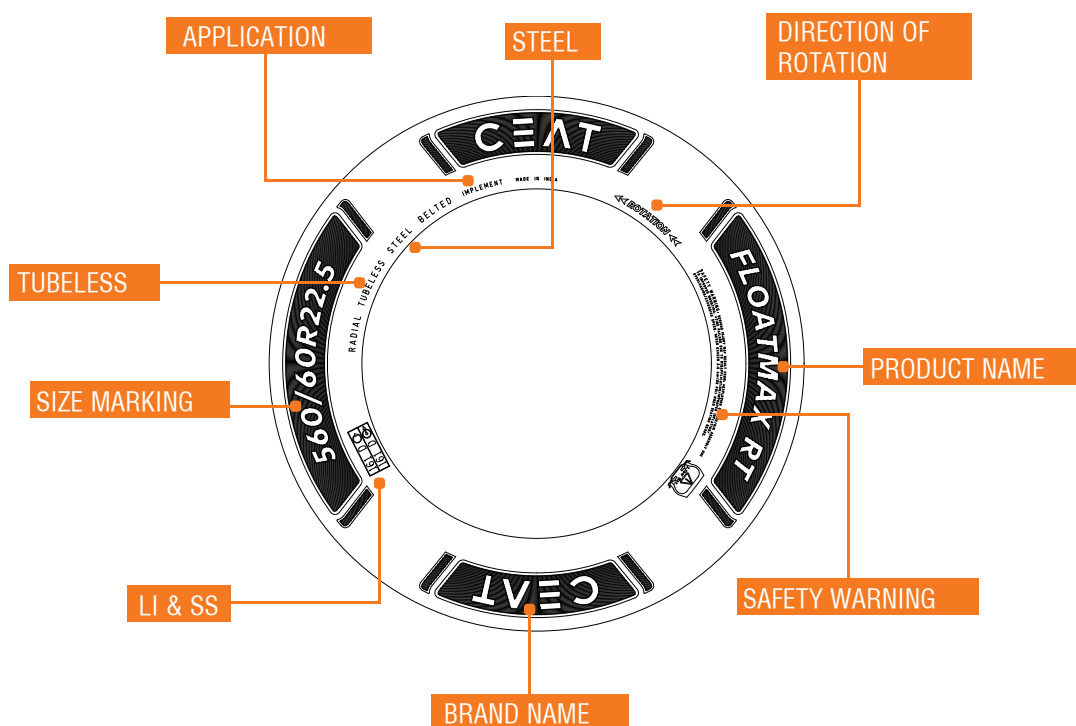

Travel direction in case of directional tread design



Safety Warning

Tubeless

Tubeless-Tires without tube



Free rolling and drive wheels

Load Index: Relates to the maximum weight permitted for each tire at a set inflation pressure.

Speed Index: Is the maximum rated speed the tire can operate at safety. For application at lower speed load carrying capacity of tire increases and vice versa.

L (In Size Designation): Low section height farm tires

SL (In Size Designation): Service limited to Ag usage

NHS: Not for highway service

ML: Mining logging (Intermittent Highway use)

DT: Desert tire (Sand surface and asphalt spreader)




LOAD INDEX AND SPEED SYMBOL

According to ETRTO (The European Tire and Rim Technical Organization), as well as ECE (Economic Commission for Europe-UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by load index and speed symbol.

The following table shows the meaning of each speed symbol and the load in kg/lbs corresponding to each load index:

Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Speed Symbol	Kmph / mph
102	850 / 1874	129	1850 / 4078	156	4000 / 8818	183	8750 / 19290	A1	5 / 3
103	875 / 1929	130	1900 / 4189	157	4125 / 9094	184	9000 / 19841	A2	10 / 6
104	900 / 1984	131	1950 / 4299	158	4250 / 9369	185	9250 / 20392	A3	15 / 9
105	925 / 2039	132	2000 / 4409	159	4375 / 9645	186	9500 / 20944	A4	20 / 12
106	950 / 2094	133	2060 / 4541	160	4500 / 9921	187	9750 / 21495	A5	25 / 16
107	975 / 2149	134	2120 / 4674	161	4625 / 10196	188	10000 / 22046	A6	30 / 19
108	1000 / 2205	135	2180 / 4806	162	4750 / 10472	189	10300 / 22707	A7	35 / 22
109	1030 / 2271	136	2240 / 4938	163	4875 / 10747	190	10600 / 23369	A8	40 / 25
110	1060 / 2337	137	2300 / 5071	164	5000 / 11023	191	10900 / 24030	B	50 / 31
111	1090 / 2403	138	2360 / 5203	165	5150 / 11354	192	11200 / 24691	C	60 / 37
112	1120 / 2469	139	2430 / 5357	166	5300 / 11684	193	11500 / 25353	D	65 / 40
113	1150 / 2535	140	2500 / 5511	167	5450 / 12015	194	11800 / 26014	E	70 / 44
114	1180 / 2601	141	2575 / 5677	168	5600 / 12346	195	12150 / 26786	F	80 / 48
115	1215 / 2679	142	2650 / 5842	169	5800 / 12787	196	12500 / 27557	G	90 / 56
116	1250 / 2756	143	2725 / 6007	170	6000 / 13228	197	12850 / 28329	J	100 / 62
117	1285 / 2833	144	2800 / 6173	171	6150 / 13558	198	13200 / 29101	K	110 / 68
118	1320 / 2910	145	2900 / 6393	172	6300 / 13889	199	13600 / 29982	L	120 / 75
119	1360 / 2998	146	3000 / 6614	173	6500 / 14330	200	14000 / 30864	M	130 / 81
120	1400 / 3086	147	3075 / 6779	174	6700 / 14771	201	14500 / 31966	N	140 / 87
121	1450 / 3197	148	3150 / 6944	175	6900 / 15212	202	15000 / 33069	P	150 / 93
122	1500 / 3307	149	3250 / 7165	176	7100 / 15653	203	15500 / 34171	Q	160 / 99
123	1550 / 3417	150	3350 / 7385	177	7300 / 16093	204	16000 / 35273	R	170 / 106
124	1600 / 3527	151	3450 / 7606	178	7500 / 16534	205	16500 / 36376	S	180 / 112
125	1650 / 3638	152	3550 / 7826	179	7750 / 17086	206	17000 / 37478		
126	1700 / 3748	153	3650 / 8047	180	8000 / 17637	207	17500 / 38580		
127	1750 / 3858	154	3750 / 8267	181	8250 / 18188	208	18000 / 39683		
128	1800 / 3968	155	3875 / 8543	182	8500 / 18739	209	18500 / 40785		

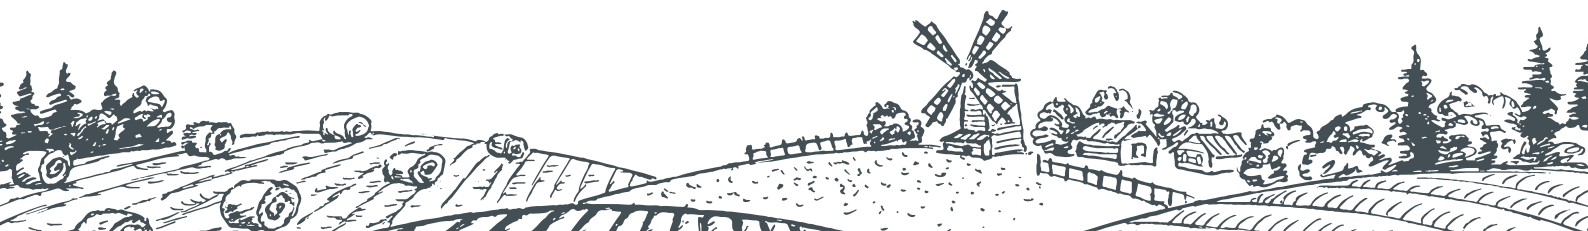

RMA CODE FOR AG TIRES AND TYPE OF TIRE SERVICE

RMA INDUSTRY CODES

The Tire and Rim Association has approved the following tire designations for Ag tires, regardless of manufacturer.

CODE	INDUSTRY TIRE TYPE	TIRE SERVICE
Front Tractor Tires		
F-1	Ag single rib tread	Rice farming
F-2M	Ag multiple-rib tread	General farming
F-2	Ag multiple-rib tread	General farming
F-3	Industrial multiple-rib tread	Light industrial service
F-2D	Ag dual rib	
Drive Tractor Tires		
R-1	Drive wheel, regular tread	General farming
R-1W	Drive wheel, wet traction tread	Wet or moist soil Wet muck,
R-2	Cane and Rice, drive wheel, deep tread	Sugar cane, Rice farming Sandy or volcanic ash soils,
R-3	Drive wheel, shallow tread	Orchards, Highway mowing, Golf course work, Light industrial service
R-4	Industrial tractor, drive wheel, intermediate tread	Light industrial service, Highway mowing
Flotation Tires		
HF-1	High flotation, rib tread	Golf course work
HF-2	High flotation, regular lug tread	General farming
HF-3	High flotation, deep lug tread	Wet or moist soil
HF-4	High flotation, extra deep tread	Swamp land
Garden Tractor Tires		
	Lug Type	Gardens
Implement Tires		
I-1	Rib tread	Free rolling wheels
I-2	Moderate traction implement	Drive or free rolling wheels
I-3	Traction tread	Drive wheels
I-6	Smooth tread	



CONVERSION TABLE

1 centimeter	cm	= 0.3937 inch	1 liter	l	= 0.264 US gallon
1 inch	in	= 2.54 cm	1 US gallon	gal	= 3.785 liters
1 meter	m	= 3.281 feet	1 kilogram	kg	= 2.205 pounds
1 foot	ft	= 0.3048 m	1 kilogram	kg	= 1 da N (de anewton)
1 kilometer	km	= 1. 6093 km	1 pound	lb	=0.4536 kg
1 mile	mi		1 bar		= 14.484 p.s.i. (Pounds per square inch)
			1 bar		= 100 kpa (kilo pascal)

PRESSURE CONVERSION TABLE

PSI	BAR	KPA	PSI	BAR	KPA	PSI	BAR	KPA
10	0.7	70	29	2	200	48	3.3	330
11	0.8	80	30	2.1	210	49	3.4	340
12	0.8	80	31	2.1	210	50	3.4	340
13	0.9	90	32	2.2	220	51	3.5	350
14	1	100	33	2.3	230	52	3.6	360
15	1	100	34	2.3	230	53	3.7	370
16	1.1	110	35	2.4	240	54	3.7	370
17	1.2	120	36	2.5	250	55	3.8	380
18	1.2	120	37	2.6	260	56	3.9	390
19	1.3	130	38	2.6	260	57	3.9	390
20	1.4	140	39	2.7	270	58	4	400
21	1.4	140	40	2.8	280	59	4.1	410
22	1.5	150	41	2.8	280	60	4.1	410
23	1.6	160	42	2.9	290	61	4.2	420
24	1.7	170	43	3	300	62	4.3	430
25	1.7	170	44	3	300	63	4.3	430
26	1.8	180	45	3.1	310	64	4.4	440
27	1.9	190	46	3.2	320	65	4.5	450
28	1.9	190	47	3.2	320	66	4.5	450



TIRE CARE AND MAINTENANCE GUIDELINES

GENERAL

1. Tire mounting and dismounting can be dangerous and should only be performed by trained personnel.
2. Never strike the tire or rim with a hammer.
3. Always use proper tire mounting tools and equipment.
4. Always work on a clean surface.

MOUNTING

1. Thorough inspection of the inside of the casing is necessary to ensure absence of any defects or foreign material.
2. Both tire and tube (if any) should be completely dry.
3. Use the correct tube. Always remember that with a new tire, a new tube (if required) should be used.
4. For tube-type tires, make sure tube and flap are correct and not damaged.
5. Always prepare a new O-ring for tubeless-type tires. Check air leakage points.
6. Correct rims which are clean and in good condition should be used for tire mounting.
7. Proper lubrication to rims and beads helps to facilitate easy and safe mounting.
8. Application of excessive lubricants can cause the tire to slip on the rim and should be avoided.
9. Mount the tire with the pry notch 60° to 90° from the valve.
10. Always mount (and dismount) tires on the short side of the rim drop center.
11. Always keep the opposite bead in the deep well to facilitate clearance over the rim flange to prevent bead damage.

INFLATION AND PROPER BEAD SEATING

1. Once a tire is mounted, the beads should be seated before the lubricant dries.
2. Safety cage or a security bar should be used during inflation. In case the cage and bar is absent, stand to one side of the tire and use an air line with a clip-on chuck and an in-line gauge that is at least 6 feet from the tire valve.
3. Center the tire on the rim and inflate to 35 psi (2.4 bar) to obtain initial bead seat.
4. Deflate the tire to about 2 psi (0.14 bar) to partially relax the beads.
5. Re-inflate the tire to 35 psi (2.4 bar) to obtain final bead seat.
6. Adjust the tire to the correct working pressure.
7. Ensure the pressure is correct at all times. Check the pressure regularly and adjust it whenever necessary.
8. Thoroughly inspect the centering rings above the inside and outside beads to ensure that they are completely seated.
9. If a bead is not completely seated:
 - Deflate the tire completely and re-inflate to 35 psi (2.4 bar).
 - If a bead is not completely seated at this point, deflate the tire, break the beads away from the rim, rotate the tire 90° and re-lubricate the beads and the rim, and repeat steps 3 through 7 above.
10. Use proper inflation pressure. Never underinflate or over inflate the tires. Never inflate an Ag tire over 35 psi (2.4 bar) to seat the beads.




Inflation pressure is adjusted to the air. Since the volume of air responsible for pressure is low (around 25% of the volume), regular monitoring of the tire pressure is essential. We recommend verification on a regular basis.

However the following points must be taken into consideration while using tire ballasting practice:

- Before rotating ballasted tires, the ballasting solution (liquid) or material (dry) must be removed and properly disposed off.
- Ballasting solution can cause rim rust. Painting rims and using rust prohibiting ingredients is recommended.

Demounting

1. Follow the reverse process of mounting to demount the tire from rim.
2. Tires with a pry notch above the bead should be lubricated at the notch before pushing the bead away from the rim flange.
3. Lubricate around the bead circumference as it is worked away from the flange.
4. Lubricate the back bead and the rim flange during dismounting.

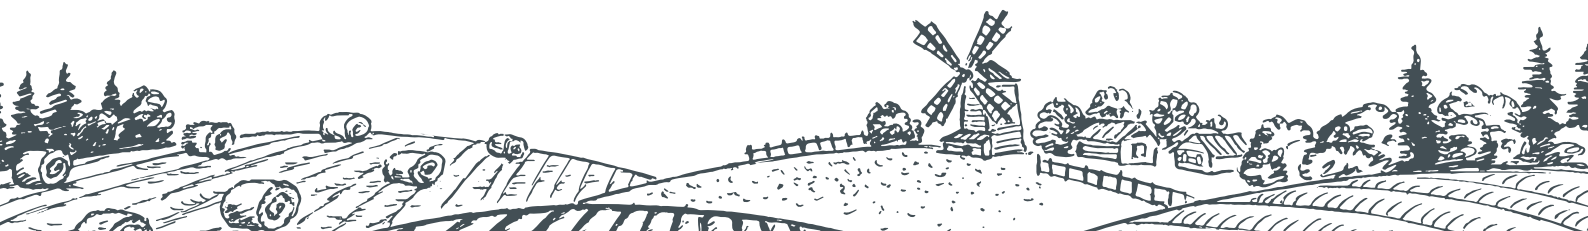

DEFINITION OF TERMS

Ag Tractor

Self-propelled Ag vehicle with two axles and wheels or tracks. Designed to pull ag trailers and operate implements used for ag/forestry work.

Two-wheel drive tractor (2WD)

Ag tractor with rear wheel drive. The front tires are smaller than the rear and typically use a rib-type tire.

Mechanical Front Wheel drive tractor (MFWD)

On demand four-wheel drive tractor with smaller tires on the front axle.

Four-wheel drive tractor (4WD)

All-wheel drive tractor with equal sized tires and power to both axles.

Compact utility tractor


Small Ag tractor (less than 75 hp) equipped with a rear PTO and three-point hitch.



IMPORTANT PARAMETERS FOR MAXIMUM TIRE LIFE

Important parameters to monitor for maximum tire life:

- Operate within the recommended load inflation pressure schedule.
- Sufficient tire to vehicle clearance.
- Remove rocks or debris trapped between dual tires or between the tire and the vehicle.
- Matching of dual tires.
- Keep tires free from petroleum products.
- Track tire performance:
 1. Brand and serial number
 2. New tire tread depth
 3. Engine hours and date at mounting
 4. Repairs, rotations or replacements by wheel position and engine hours
 5. Final disposition - total hours or miles of service and date of removal
 - Reason for removal
 - Hours
 - Date of removal
 - Remaining tread depth at removal
- Record keeping helps to determine problem areas
- Vehicle mechanical irregularities such as; misalignment, improperly adjusted brakes or defective brake drums which can damage tires.
- Proper checking and maintenance of rims or wheels and valves.
- Proper storage of tires. Tires should be stored in cool, dark places, free from dirt, oil or sunlight, and as far as possible from running electric motors.
- Prompt repair of service damaged tires. There are usually three major types of cuts or damage which occur in tires.
 - 1 Tread surface cuts - these types of cuts might look minor, but they have a tendency to pick up and hold rocks. If the stones are not removed, they can work their way into the carcass, resulting in tire failure.
 2. Cuts through the tread - damage from this type of injury may lead to premature tire failure. When it is determined that the carcass of the tire has been damaged, the tire should be removed from service immediately and sent to a qualified repair facility.
 3. Sidewall cuts - might be repairable depending on the location and extent of damage.

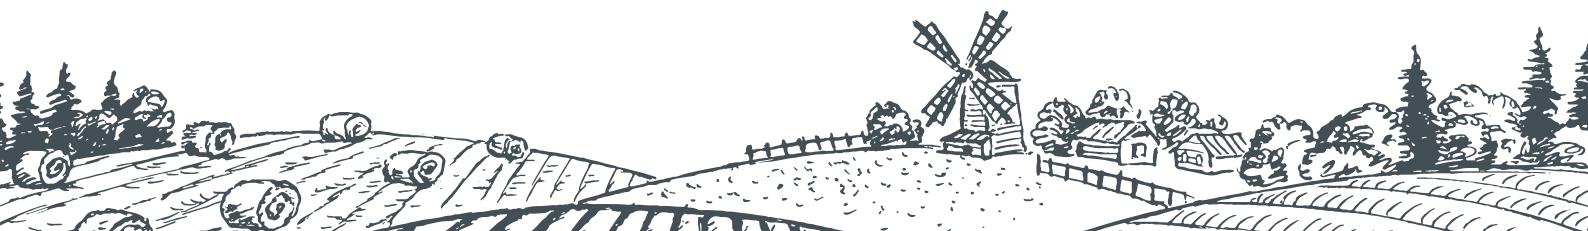

PROPER HANDLING AND TRANSPORTING TIRES

When transporting tires, care must be taken to ensure that the beads and inner liner of the tire are not damaged. Damage can result in premature tire failure due to air migration into the body of the tire.

CORRECT



INCORRECT



GOOD



BAD



BAD


PROPER STORAGE:

- Do not store tires for long periods.
- Tires/tubes should not be exposed to direct sunlight.
- Storage area should be free from dirt, oils and away from electric motors.



SAFETY PRECAUTIONS

1. NEVER re-inflate a tire that has been in a run-flat or under inflated condition (80% or less of recommended pressure).
2. ALWAYS use recommended tools for mounting and demounting the tires.
3. BEFORE loosening any nuts or clamps that attach a multi-piece rim assembly to a vehicle, always completely deflate the tire (both tires of a dual assembly) by taking out the valve core(s). Never attempt to demount a tire from a rim unless you are sure that the tire is completely deflated. Failure to follow this practice can cause the assembly to explode with force sufficient to cause serious injury or death.
4. NEVER use any rim part that is bent, pitted from corrosion, cracked or worn. These are unserviceable parts and must be destroyed. Remove rust, dirt and foreign material from rim parts.
5. NEVER use a rim part unless you can positively identify it from the manufacturer's stamped markings. If you cannot identify a part, it must be destroyed.
6. ALWAYS inspect inside of a tire for loose cords, cuts, penetrating objects or other casing damage. Repairable damage must be repaired by trained personnel before placing the tire back into service. Tires with unrepairable damage should be destroyed.
7. ALWAYS replace a tire with one having the same rim diameter designation and suffix letters.
8. ALWAYS inspect the inside of a tire and remove dirt, liquids or other foreign material before mounting.
9. NEVER install tubes that have buckled or been creased.
10. ALWAYS use radial tubes with radial tires.
11. ALWAYS use new tubes with new tires.
12. NEVER use a tube in a casing larger or smaller than that for which the tube was designed by the manufacturer.
13. ALWAYS check to be sure that the tube is clean before installing in the tire.
14. ALWAYS lubricate with only approved tire mounting lubricants or mild vegetable oil, or soap solution. Never use antifreeze, silicones or petroleum-based lubricants. This will damage the tire.
15. ALWAYS inspect valve cores for proper air retention. Replace damaged or leaky cores.

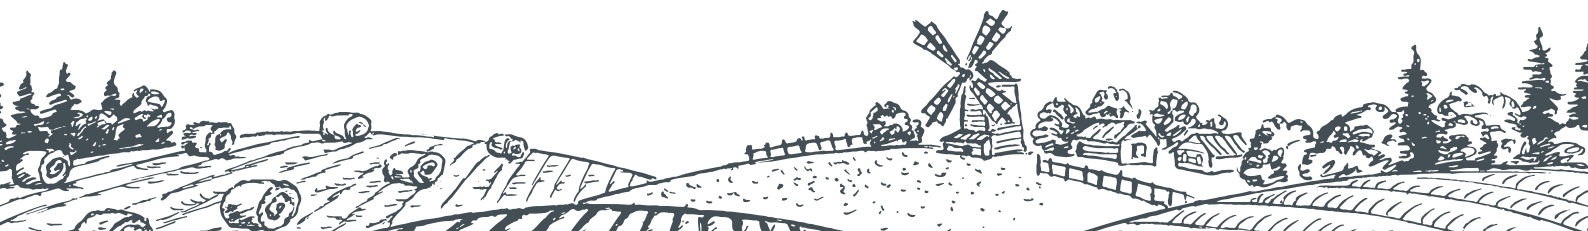

16. ALWAYS inflate tires to tire manufacturer's recommended cold inflation pressure for the tire's intended service.
17. When inflating a tire not on a vehicle, use a safety cage or other restraining device. Use an extension hose with in-line air gauge and clip-on air chuck, which allows the operator to stand clear of the trajectory.
18. For tube-type tires, inflate to service pressure without the valve core installed and then completely deflate the tire to prevent wrinkles in the tube. Insert the valve core and re-inflate the tire to recommended service pressure as specified for the tire and rim.
19. ALWAYS use sealing valve caps to prevent loss of air or fluid.





LIMITED WARRANTY POLICY

CEAT AG RADIALS



TIRES COVERED

This limited warranty covers CEAT-branded Ag radial tires which are sold in the USA, Canada and Mexico, manufactured on or after April 1, 2017 and meet the following criteria:

1. Tires bear the name "CEAT" and the complete date code or serial number molded on the sidewall.
2. Tires are not more than 7 years old from the date of invoice (Dealer's invoice to the end user) or from the month of production in case of non-availability of invoice.
3. Tires have a minimum of 5/32" of centerline tread depth remaining.
4. Tires were used strictly in accordance with the recommendation of the applicable vehicle manufacturer and CEAT standard usage, maintenance and safety recommendations, in normal Ag service.

SCOPE OF WARRANTY: REMEDIES

CEAT will provide a credit for eligible tires experiencing following failures:

1. Workmanship and Materials Defects

If the tire becomes unserviceable, unrepairable or unsafe due to a defect in materials or workmanship of the tire, the credit will be equal to the applicable percentage of the price of the warranted tire to the distributor, as set forth in the following table:


Tire will be replaced by giving 100% credit in case of a failure within 2 years & not more than 25% wear provided both the conditions are satisfied.

Period After Month of Production/ Date of Invoice	% Wear	% Credit
1 st or 2 nd Year	25% or less	100%
3 rd to 7 th Year	26% to 90%	100% minus the % wear
	Above 90%	10%

2. Field Hazard and Stubble Damage

If the tire fails due to stubble damage or field hazard within a period of 3 years from the date of invoice (end-user purchase date) or the month of production in case of absence of invoice, the credit will be equal to the applicable percentage of the price of the warranted tire to the distributor, as set forth in the following table:

Period After Month of Production/ Date of Invoice	% Credit
1 st Year	75%
2 nd Year	50%
3 rd Year	25%

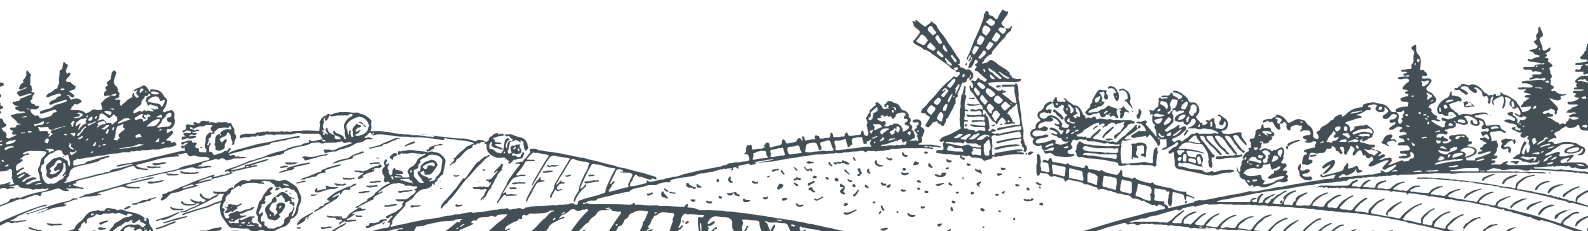

The above remedies are available only to the original end-use purchaser, and the purchaser is responsible for all applicable taxes, and for charges for mounting, demounting, field service & any other incidental costs, including applicable freight, with respect to the replacement tire and the warranted tire. All failed tires will be disabled, and the date code or serial number will be removed. The purchaser will be responsible for the disposal of all failed tires.

LIMITATION OF LIABILITY

Any applicable credit as provided above will be CEAT's only liability, and the purchaser's only remedy, for any tire failure. CEAT will have no responsibility for loss of use, revenue or anticipated profits, or for any other incidental or consequential damages, whether for breach of warranty or other contract, negligence, strict liability or under other tort theories.

OTHER WARRANTIES

CEAT makes no warranty on its Ag radial tires sold in the USA, Canada or Mexico other than the warranty set forth above. This warranty is in lieu of all other warranties, express and implied. There is no warranty of merchantability or fitness for any particular purpose on this product. No agent or employee of CEAT is authorized to extend any other warranty or assume for CEAT any warranty except this warranty. This warranty is given only to the original end-use purchaser.

FAILURES NOT COVERED

This warranty does not cover:

1. Any tire that fails or is damaged due to mechanical irregularity of the vehicle, improper installation, fire, accident or improper wheel and rim assembly.
2. Tires that fail due to excess speed, overload, driving contests, pulling contests, competitive driving, logging or any other unauthorized applications.
3. Tires that are put in service and that are not in full accordance with the intended use of the vehicle and the recommendations of the vehicle manufacturer.
4. Broken or damaged beads due to improper mounting or demounting.
5. Rapid tread wear, irregular wear or failure resulting from use of mismatched/ damaged/ repaired rim, misalignment, improper wheel assembly, spinning of the tire.
6. Damage caused by neglect, abuse or by mismatching of adjacent tires, misalignment, run-flat, improper inflation, improper operation of vehicle, excess speed, overloading, improper repair, insertion of sealant, or petroleum damage, etc.
7. Damage due to improper storage, chain damage, failure in extreme weather conditions, damage due to alteration of appearance or structure of tire, and the like.
8. Tires that are retreaded/hot repaired/full service rendered/uneven wear/rapid tread wear.
9. Tires that have been modified (added buttress shoulders/retreading/regrooving).

OTHER INFORMATION

While every care is taken to manufacture the tire to high standards, the tires may still fail in service or become unserviceable on account of factors or conditions beyond the control of the manufacturer.

Disclaimer – The tires under the brand name of CEAT are being manufactured and warranted by CEAT Specialty Tires Limited (herein after referred to as CSTL, a company incorporated under the laws of India) and all the rights and liabilities will be settled by thereto by CSTL.



CLAIM FORM

DATE SUBMITTED

DEALER NAME: CUSTOMER NAME:

ADDRESS: ADDRESS:

PHONE & EMAIL: PHONE & EMAIL:

INSTALLED DATE: TIRE SIZE:

REMOVAL DATE: LOAD INDEX/PR:

NO OF HOURS RUN: DATE CODE:

TYPE OF EQUIPMENT: BRAND NAME:

MAKE: MODEL: WHEEL POSITION:

APPLICATION: TREAD DEPTH (New):

AIR PRESSURE: TREAD DEPTH: (Remaining):

DESCRIPTION OF FAILURE:

WARRANTY CLAIMS

Requirements for submitting warranty claims.

Submit the following to any CEAT distributor/dealer:

1. Electronic photos in JPG format for each tire claimed.
 - A. Picture of the sidewall showing size, brand, load index and any other distinguishing information on the tire.
 - B. Picture of the tread.
 - C. Picture of the date code or serial number.
 - D. Pictures of the failed area from exterior as well as interior view if possible
2. Completed CEAT claim form.



LIMITED WARRANTY POLICY

CEAT AG BIAS



TIRES COVERED

This warranty covers CEAT-branded Agriculture bias tires which are sold in the USA, Canada and Mexico, manufactured on or after Nov 2017 and meet the following criteria:

1. Tires bear the name “CEAT” or “ÄLTURA” and the complete date code or serial number molded on the sidewall.
2. Tires are not more than 5 years old from the date of invoice (Dealer’s invoice to the end user) or from the month of production in case of non-availability of invoice.
3. Tires have a minimum of 5/32” of centerline tread depth remaining.
4. Tires were used strictly in accordance with the recommendation of the applicable vehicle manufacturer and CEAT standard usage, maintenance and safety recommendations, in normal Ag service.


SCOPE OF WARRANTY: REMEDIES

CEAT will provide a credit for eligible tires experiencing following failures:

1. Workmanship and Materials Defects

If the tire becomes unserviceable, unrepairable or unsafe due to a defect in materials or workmanship of the tire, the credit will be equal to the applicable percentage of the price of the warranted tire to the distributor, as set forth in the following table:

% Wear	% Credit extended				
	Years from production or months/years after sale				
	1 st Year	2 nd Year	3 rd Year	4 th Year	5 th Year
0-10	100	90	60	40	25
11-20	85	70	55	35	20
21-40	70	55	50	30	15
41-60	50	35	25	20	10
61-80	30	20	15	15	0
81-100	15	15	10	10	0

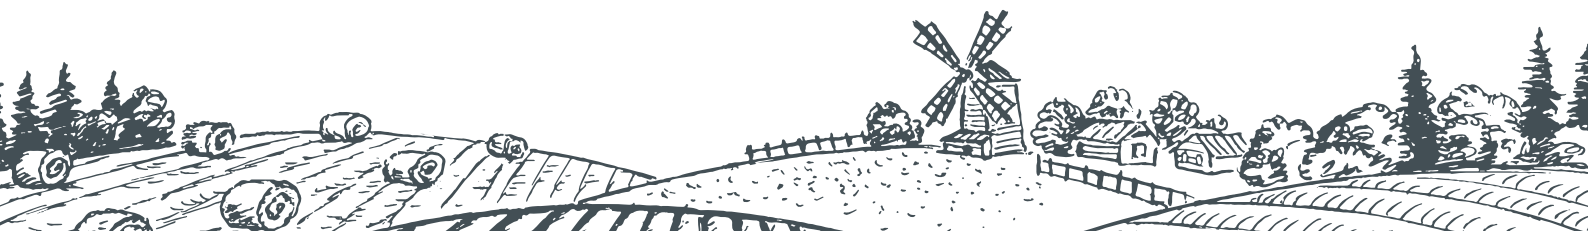

**When these limits are exceeded, all warranties, express or implied, expire.

**For claims submitted during the first year in service with 10% tread removal or less, a credit of 100.0% will be issued. After the first year, credit will be based on years in service and tread removal according to the above chart.

2. Field Hazard and Stubble Damage

If the tire fails due to stubble damage or field hazard within a period of 3 years from the date of invoice (end user purchase date) or the month of production in case of absence of invoice, the credit will be equal to the applicable percentage of the price of the warranted tire to the distributor, as set forth in the following table:

Period	Wear	Credit
Within 1 st year	Less than 25%	75%
Within 2 nd year	Less than 50%	50%
Within 3 rd Year	Less than 75%	25%

**When these limits are exceeded, all warranties, express or implied, expire.

The above remedies are available only to the original end-use purchaser, and the purchaser is responsible for all applicable taxes, and for charges for mounting, demounting, field service & any other incidental costs, including applicable freight, with respect to the replacement tire and the warranted tire. All claim tires will be discarded and permanently removed from service. The date code or serial number will be removed and submitted with the CEAT claim form to an authorized CEAT distributor. The purchaser will be responsible for the scrapping of all claim tires and submission of date code/serial no.

LIMITATION OF LIABILITY

Any applicable credit as provided above and will be CEAT's only liability, and the purchaser's only remedy, for any tire failure. CEAT WILL HAVE NO RESPONSIBILITY FOR LOSS OF USE, REVENUE OR ANTICIPATED PROFITS, OR FOR ANY OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES, WHETHER FOR BREACH OF WARRANTY OR OTHER CONTRACT, NEGLIGENCE, STRICT LIABILITY OR UNDER OTHER TORT THEORIES.

Other Warranties

CEAT makes no warranty on its bias tires sold in the USA, Canada or Mexico other than the warranty set forth above. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS AND IMPLIED. THERE IS NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE ON THIS PRODUCT.

No agent or employee of CEAT is authorized to extend any other warranty or assume for CEAT any warranty except this warranty. This warranty is given only to the original end-use purchaser.



FAILURES NOT COVERED

This warranty does not cover:

1. Any tire that fails or is damaged due to mechanical irregularity of the vehicle, improper installation, fire, accident or improper wheel and rim assembly.
2. Tires that fail due to excess speed, overload, driving contests, pulling contests, competitive driving, logging or any other unauthorized applications.
3. Tires that are put in service and that are not in full accordance with the intended use of the vehicle and the recommendations of the vehicle manufacturer.
4. Broken or damaged beads due to improper mounting or demounting.
5. Rapid tread wear, irregular wear or failure resulting from use of mismatched/damaged/repaired rim, misalignment, improper wheel assembly, spinning of the tire.
6. Damage caused by neglect, abuse or by mismatching of adjacent tires, misalignment, run-flat, improper inflation, improper operation of vehicle, excess speed, overloading, improper repair, insertion of sealant, or petroleum damage, etc.
7. Damage due to improper storage, chain damage, failure in extreme weather conditions, damage due to alteration of appearance or structure of tire, and the like.
8. Tires that are retreaded/hot repaired/full service rendered/uneven wear/rapid tread wear.
9. Tires that have been modified (added buttress shoulders/retreading/regrooving).


OTHER INFORMATION

While every care is taken to manufacture the tire to high standards, the tires may still fail in service or become unserviceable on account of factors or conditions beyond the control of the manufacturer.

Warranty Claims

Requirements for submitting warranty claims. Submit the following to any CEAT distributor/dealer:

1. Electronic photos in JPG format for each tire claimed.
 - A. Picture of the sidewall showing size, brand, load index and any other distinguishing information on the tire.
 - B. Picture of the tread.
 - C. Picture of the date code or serial number.
 - D. Pictures of the failed area from exterior as well as interior view if possible
2. Completed CEAT claim form.

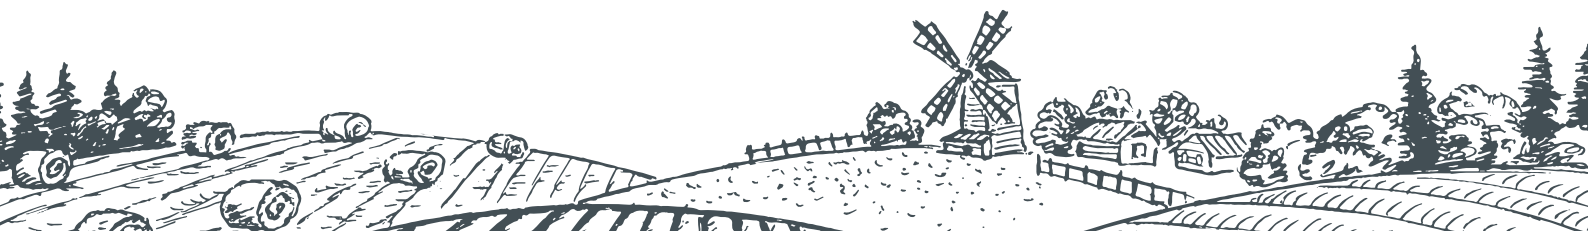

CLAIM FORM

DATE SUBMITTED

DEALER NAME:	CUSTOMER NAME:
ADDRESS:	ADDRESS:
PHONE & EMAIL:	PHONE & EMAIL:
INSTALLED DATE:	TIRE SIZE:
REMOVAL DATE:	LOAD INDEX:
NO OF HOURS RUN:	DATE CODE:
TYPE OF EQUIPMENT:	BRAND NAME:
MAKE: MODEL:	WHEEL POSITION:
APPLICATION:	TREAD DEPTH (New):
AIR PRESSURE:	TREAD DEPTH: (Remaining):
DESCRIPTION OF FAILURE:	



SKU CODE INDEX


RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
1	106246	250/85 R 20	FARMAX R85	116A8/B	33	17
2	104902	280/85 R 20	FARMAX R85	112A8/B	34	17
3	105245	320/85 R 20	FARMAX R85	119A8/B	35	17
4	104901	250/85 R 24	FARMAX R85	109A8/B	35	17
5	104903	280/85 R 24	FARMAX R85	115A8/B	36	17
6	104905	320/85 R 24	FARMAX R85	122A8/B	37	18
7	105895	320/85 R 24	FARMAX R85	142A8/B	37	18
8	104874	340/85 R 24	FARMAX R85	125A8/B	37	18
9	104876	380/85 R 24	FARMAX R85	131A8/B	38	18
10	104908	420/85 R 24	FARMAX R85	137A8/B	39	18
11	105983	250/85 R 28	FARMAX R85	112A8/B	37	19
12	104904	280/85 R 28	FARMAX R85	118A8/B	37	19
13	105655	320/85 R 28	FARMAX R85	124A8/B	38	19
14	104875	340/85 R 28	FARMAX R85	127A8/B	39	19
15	104877	380/85 R 28	FARMAX R85	133A8/B	40	19
16	104909	420/85 R 28	FARMAX R85	139A8/B	41	20
17	104907	380/85 R 30	FARMAX R85	135A8/B	41	20
18	104910	420/85 R 30	FARMAX R85	140A8/B	41	20
19	105860	420/85 R 30	FARMAX R85	147A8/B	41	20
20	104913	460/85 R 30	FARMAX R85	145A8/B	42	20
21	105246	320/85 R 32	FARMAX R85	126A8/B	40	21
22	105941	320/85 R 32	FARMAX R85	142A8/B	40	21
23	105656	320/85 R 34	FARMAX R85	141A8	41	21
24	105241	380/85 R 34	FARMAX R85	137A8/B	42	21
25	104911	420/85 R 34	FARMAX R85	142A8/B	43	21
26	105338	420/85 R 34	FARMAX R85	147A8/B	43	22
27	104914	460/85 R 34	FARMAX R85	147A8/B	44	22
28	105340	460/85 R 34	FARMAX R85	157A8/B	44	22
29	105247	320/85 R 36	FARMAX R85	128A8/B	41	22
30	105244	340/85 R 36	FARMAX R85	132A8/B	42	22
31	105690	320/85 R 38	FARMAX R85	143A8/B	42	23
32	104906	340/85 R 38	FARMAX R85	133A8/B	43	23
33	105942	340/85 R 38	FARMAX R85	148A8/B	43	23
34	104912	420/85 R 38	FARMAX R85	144A8/B	44	23




RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SS	RCI	PAGE NO.
35	104915	460/85 R 38	FARMAX R85	149A8/B	45	23
36	105341	460/85 R 38	FARMAX R85	167A8/B	45	24
37	104916	520/85 R 38	FARMAX R85	155A8/B	46	24
38	105657	520/85 R 38	FARMAX R85	169A8/B	46	24
39	105242	520/85 R 42	FARMAX R85	157A8/B	47	24
40	105339	520/85 R 42	FARMAX R85	169A8/B	47	24
41	105243	520/85 R 46	FARMAX R85	158A8/B	48	25
42	105658	520/85 R 46	FARMAX R85	174A8/B	48	25
43	105333	380/80 R 38	FARMAX R80	142A8/B	43	26
44	106251	380/80 R 38	FARMAX R80	152A8/B	43	26
45	105262	480/80 R 42	FARMAX R80	151A8/B	46	26
46	105263	480/80 R 46	FARMAX R80	158A8/B	47	26
47	105325	260/70 R 20	FARMAX R70	113A8/B	32	27
48	105334	280/70 R 20	FARMAX R70	116A8/B	32	27
49	105261	300/70 R 20	FARMAX R70	110A8/B	33	27
50	105406	300/70 R 20	FARMAX R70	120A8/B	33	27
51	105248	320/70 R 20	FARMAX R70	113A8/B	34	27
52	105257	320/70 R 20	FARMAX R70	123A8/B	34	28
53	105253	360/70 R 20	FARMAX R70	120A8/B	35	28
54	105266	360/70 R 20	FARMAX R70	129A8/B	35	28
55	105258	380/70 R 20	FARMAX R70	122A8/B	35	28
56	105267	380/70 R 20	FARMAX R70	132A8/B	35	28
57	105249	320/70 R 24	FARMAX R70	116A8/B	36	29
58	105254	360/70 R 24	FARMAX R70	122A8/B	37	29
59	105259	380/70 R 24	FARMAX R70	125A8/B	37	29
60	105268	420/70 R 24	FARMAX R70	130A8/B	38	29
61	105270	480/70 R 24	FARMAX R70	138A8/B	39	29
62	105250	320/70 R 28	FARMAX R70	119A8/B	38	30
63	105255	360/70 R 28	FARMAX R70	125A8/B	38	30
64	105260	380/70 R 28	FARMAX R70	127A8/B	39	30
65	105269	420/70 R 28	FARMAX R70	133A8/B	40	30
66	105271	480/70 R 28	FARMAX R70	140A8/B	41	30
67	105943	480/70 R 28	FARMAX R70	151A8/B	41	31
68	105984	600/70 R 28	FARMAX R70	161A8/B	42	31
69	105322	420/70 R 30	FARMAX R70	134A8/B	40	31
70	105272	480/70 R 30	FARMAX R70	141A8/B	41	31
71	105659	480/70 R 30	FARMAX R70	147D/150A8	41	31
72	105326	520/70 R 30	FARMAX R70	145A8/B	42	32
73	105660	600/70 R 30	FARMAX R70	152A8/B	43	32
74	106256	600/70 R 30	FARMAX R70	158A8/B	43	32

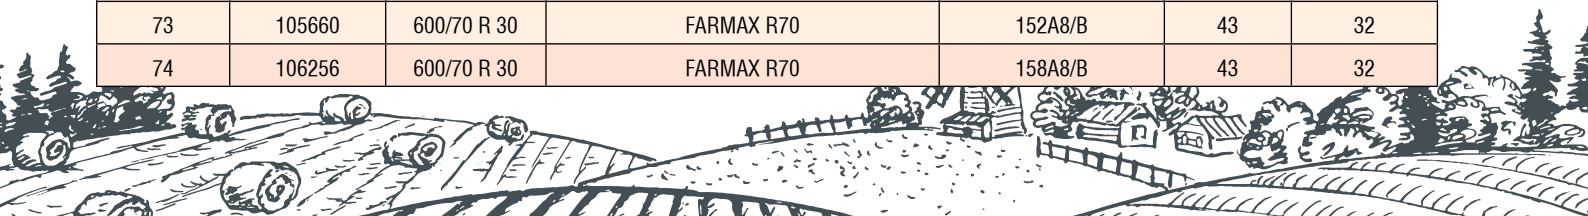


RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SS	RCI	PAGE NO.
75	105273	480/70 R 34	FARMAX R70	143A8/B	43	32
76	105944	480/70 R 34	FARMAX R70	149A8/B	43	32
77	105661	520/70 R 34	FARMAX R70	148A8/B	44	33
78	105662	480/70 R 38	FARMAX R70	145A8/B	44	33
79	105327	520/70 R 38	FARMAX R70	150A8/B	45	33
80	105342	580/70 R 38	FARMAX R70	155A8/B	46	33
81	105663	710/70 R 38	FARMAX R70	172A/B	47	33
82	105664	710/70 R 38	FARMAX R70	178A/B	47	34
83	106349	710/70 R 38	FARMAX R70	178D / 181A8/B	36	34
84	106245	710/70 R 42	FARMAX R70	173A/B	48	34
85	106350	710/70 R 42	FARMAX R70	173D	48	34
86	106247	420/90 R 30	FARMAX R90	147A/B	42	34
87	105986	340/65 R 20	FARMAX R65	124D	33	36
88	105987	420/65 R 20	FARMAX R65	135D	35	36
89	105988	440/65 R 20	FARMAX R65	138D	36	36
90	105982	420/65 R 24	FARMAX R65	138D	38	36
91	105666	440/65 R 24	FARMAX R65	128D	37	36
92	105945	440/65 R 24	FARMAX R65	135D	37	37
93	105256	480/65 R 24	FARMAX R65	133D	38	37
94	105939	480/65 R 24	FARMAX R65	140D	38	37
95	105332	540/65 R 24	FARMAX R65	140D	39	37
96	105670	540/65 R 24	FARMAX R65	146D	39	37
97	105667	440/65 R 28	FARMAX R65	138D	39	38
98	105408	480/65 R 28	FARMAX R65	136D	40	38
99	105940	480/65 R 28	FARMAX R65	142D	40	38
100	105251	540/65 R 28	FARMAX R65	142D	41	38
101	105671	540/65 R 28	FARMAX R65	149D	41	38
102	105985	600/65 R 28	FARMAX R65	147D	42	39
103	105668	600/65 R 28	FARMAX R65	154D	42	39
104	105335	540/65 R 30	FARMAX R65	143D	41	39
105	105672	540/65 R 30	FARMAX R65	150D	41	39
106	105989	600/65 R 30	FARMAX R65	149D	42	39
107	106255	600/65 R 30	FARMAX R65	155D	42	40
108	105336	540/65 R 34	FARMAX R65	145D	43	40
109	105673	540/65 R 34	FARMAX R65	152D	43	40
110	105337	600/65 R 34	FARMAX R65	151D	44	40
111	105675	600/65 R 34	FARMAX R65	157D	44	40
112	105669	540/65 R 38	FARMAX R65	147D	44	41
113	105674	540/65 R 38	FARMAX R65	153D	44	41

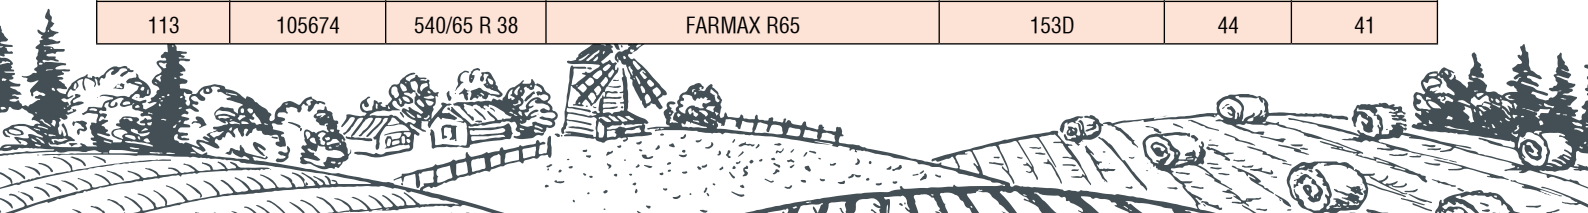


SL NO.	SKU CODE	SIZE	PATTERN	LI/SS	RCI	PAGE NO.
114	105409	600/65 R 38	FARMAX R65	153D	45	41
115	105252	650/65 R 38	FARMAX R65	157D	46	41
116	105676	650/65 R 38	FARMAX R65	163D	46	41
117	105407	650/65 R 42	FARMAX R65	158D	47	42
118	105677	650/65 R 42	FARMAX R65	165D	47	42
119	106257	650/65 R 42	FARMAX R65	170D	47	42
120	106365	480/80 R 50	TORQUEMAX	159D	-	44
121	106366	480/80 R 50	TORQUEMAX	165D	-	44
122	105684	210/95 R 32	FARMAX RC	117D/120A8	38	46
123	105685	230/95 R 32	FARMAX RC	128D/131A8	38	46
124	105686	270/95 R 32	FARMAX RC	133D/136A8	40	46
125	105687	230/95 R 36	FARMAX RC	127D/130A8	40	46
126	106248	230/95 R 36	FARMAX RC	130D/133A8	40	46
127	105688	270/95 R 36	FARMAX RC	136D/139A8	41	46
128	105689	270/95 R 38	FARMAX RC	137D/140A8	41	47
129	106249	270/95 R 38	FARMAX RC	140D/143A8	41	47
130	106249	270/95 R 38	FARMAX RC	139D/142A8	43	47
131	105691	270/95 R 42	FARMAX RC	137D/140A8	43	47
132	105328	320/80 R 42	FARMAX RC	141A8/B	43	47
133	105692	320/90 R42	FARMAX RC	136D/139A8	44	47
134	105981	320/90 R42	FARMAX RC	144D/147A8/B	44	48
135	105693	230/95 R 44	FARMAX RC	129D/132A8	43	48
136	105694	230/95 R 44	FARMAX RC	134D/137A8	43	48
137	105695	270/95 R 44	FARMAX RC	140D/143A8	44	48
138	106280	270/95 R 44	FARMAX RC	142D/145A8	43	48
139	105698	340/85 R 46	FARMAX RC	147D/150A8	45	48
140	106250	380/90 R 46	FARMAX RC	159D/162A8	46	49
141	105329	380/90 R 46	FARMAX RC	165A8/B	46	49
142	105696	270/95 R 46	FARMAX RC	141D/144A8	44	49
143	105330	300/95 R 46	FARMAX RC	143D/146A8	45	49
144	105697	300/95 R 46	FARMAX RC	148D/151A8	45	49
145	105323	230/95 R 48	FARMAX RC	136D/139A8	44	50
146	105324	270/95 R 48	FARMAX RC	142D/145A8	45	50
147	105331	340/85 R 48	FARMAX RC	148D/151A8	45	50
148	105343	560/45 R 22.5	FLOATMAX FT	152D	36	61
149	105702	560/60 R 22.5	FLOATMAX FT	161D	-	61
150	105703	600/50 R 22.5	FLOATMAX FT	159D	-	61
151	105265	600/55 R 26.5	FLOATMAX FT	165D	40	61
152	105345	460/70 R 24	LIFT PRO	159A8/B	38	79

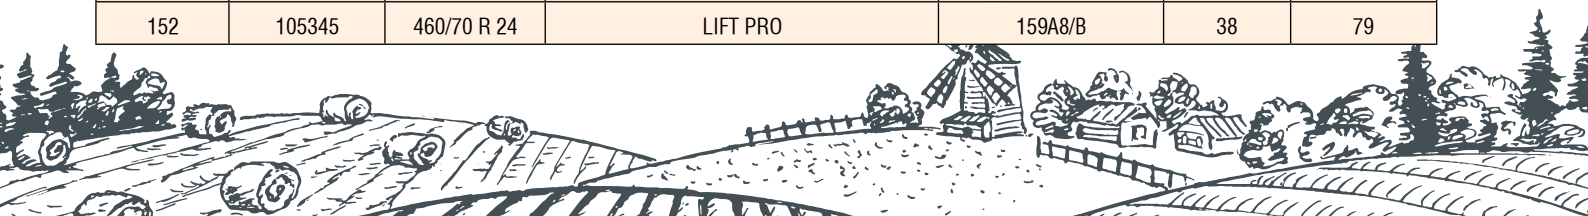

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
1	102898	8.3-24	FARMAX R1	8	TT	53
2	102899	9.5-24	FARMAX R1	8	TT	53
3	102900	11.2-24	FARMAX R1	8	TT	53
4	102698	12.4-24	FARMAX R1	8	TT	53
5	103383	13.6-24	FARMAX R1	8	TT	53
6	102691	14.9-24	FARMAX R1	8	TT	53
7	102704	16.9-24	FARMAX R1	8	TT	53
8	102692	18.4-26	FARMAX R1	12	TT	53
9	102703	11.2-28	FARMAX R1	8	TT	53
11	102901	12.4-28	FARMAX R1	8	TT	53
12	102902	13.6-28	FARMAX R1	8	TT	54
13	102699	14.9-28	FARMAX R1	8	TT	54
14	102700	16.9-28	FARMAX R1	12	TT	54
15	102701	16.9-30	FARMAX R1	10	TT	54
16	102693	18.4-30	FARMAX R1	12	TT	54
17	103008	18.4-34	FARMAX R1	8	TT	54
18	102702	18.4-34	FARMAX R1	12	TT	54
19	102706	13.6-36	FARMAX R1	8	TT	54
20	102697	13.6-38	FARMAX R1	8	TT	54
21	102694	15.5-38	FARMAX R1	8	TT	54
22	103004	15.5-38	FARMAX R1	10	TT	54
23	102705	16.9-38	FARMAX R1	8	TT	54
24	103006	16.9-38	FARMAX R1	10	TT	54
25	103009	18.4-38	FARMAX R1	8	TT	54
26	102707	18.4-38	FARMAX R1	12	TT	54
27	102881	5.00-15	FARMAX F2	4	TT	56
28	102882	5.50-16	FARMAX F2	6	TT	56
29	102883	6.00-16	FARMAX F2	6	TT	56
30	102884	6.50-16	FARMAX F2	6	TT	56
31	102885	7.50-16	FARMAX F2	8	TT	56
32	102695	10.00-16	FARMAX F2	8	TT	56
33	102696	11.00-16	FARMAX F2	8	TT	56
34	102886	7.50-18	FARMAX F2	8	TT	56
35	102887	4.00-19	FARMAX F2	4	TT	56
36	102888	7.50-20	FARMAX F2	8	TT	56



Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
37	103521	9.5L-15SL	FARMAX F2M	8	TL	58
38	103522	11L-15SL	FARMAX F2M	8	TL	58
39	103523	10.00-16SL	FARMAX F2M	8	TL	58
40	103524	11.00-16SL	FARMAX F2M	8	TL	58
41	103953	500/50-17	FLOTATION T422	16	TL	63
42	105129	500/50-17	FLOTATION T422	18	TL	63
43	103479	500/60-22.5	FLOTATION T422	16	TL	63
44	102833	550/45-22.5	FLOTATION T422	16	TL	63
45	103141	550/45-22.5	FLOTATION T422	20	TL	63
46	102836	550/60-22.5	FLOTATION T422	16	TL	63
47	102417	600/50-22.5	FLOTATION T422	16	TL	63
48	103177	600/55-22.5	FLOTATION T422	16	TL	63
49	103176	700/40-22.5	FLOTATION T422	16	TL	63
50	103175	700/50-22.5	FLOTATION T422	16	TL	63
51	103261	600/55-26.5	FLOTATION T422	16	TL	63
52	103181	700/50-26.5	FLOTATION T422	16	TL	63
53	100862	#800/45-26.5	FLOTATION T422	12	TL	63
54	102841	800/45-26.5	FLOTATION T422	16	TL	63
55	103951	400/55-22.5	T422 VALUE PRO	16	TL	65
56	103952	500/45-22.5	T422 VALUE PRO	16	TL	65
57	103603	500/60-22.5	T422 VALUE PRO	16	TL	65
58	103604	550/45-22.5	T422 VALUE PRO	16	TL	65
59	103602	550/60-22.5	T422 VALUE PRO	16	TL	65
60	102835	400/60-15.5	TR800	14	TL	66
61	105128	400/60-15.5	TR800	18	TL	66
62	103274	480/45-17	FLOTATION PLUS	16	TL	67
63	101775	500/50-17	FLOTATION PLUS	14	TL	67
64	104862	500/60-22.5	FLOTATION TX440	16	TL	68
65	104840	550/60-22.5	FLOTATION TX440	16	TL	68
66	104861	600/50-22.5	FLOTATION TX440	16	TL	68
68	104863	700/40-22.5	FLOTATION TX440	16	TL	68
70	100043	11.2-24	IRROGATOR	4	TT	70
71	103584	14.9-24	IRROGATOR	8	TT	70
72	103582	11.2-38	IRROGATOR	6	TT	70
73	105234	7.60-15 SL	FARM IMPLEMENT I1	10	TL	73
74	101146	9.5L-15 SL	FARM IMPLEMENT I1	8	TT	73
75		11L-15 SL	FARM IMPLEMENT I1	8	TL	73
76		12.5L-15 SL	FARM IMPLEMENT I1	10	TT	73

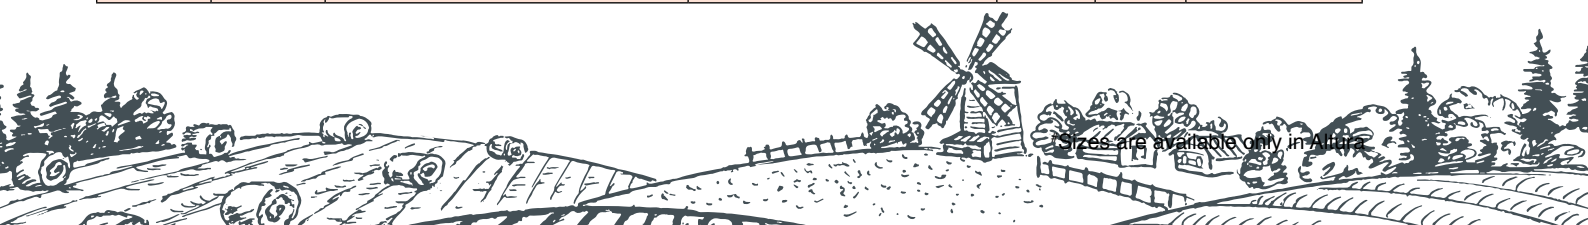

Sizes are available only in Alpha

Sr.No	SKU CODE	SIZE	Pattern	PR	TYPE	PAGE NO.
77	101145	9.5L-15 SL	FARM IMPLEMENT I1	8	TL	73
78	102889	9.5L-15 SL	FARM IMPLEMENT I1	12	TT	73
79	102890	9.5L-15 SL	FARM IMPLEMENT I1	12	TL	73
80	100573	11L-15SL	FARM IMPLEMENT I1	8	TT	73
81	101147	11L-15SL	FARM IMPLEMENT I1	8	TL	73
82	102891	11L-15SL	FARM IMPLEMENT I1	10	TT	73
83	102892	11L-15SL	FARM IMPLEMENT I1	10	TL	73
84	102893	11L-15SL	FARM IMPLEMENT I1	12	TT	73
85	102894	11L-15SL	FARM IMPLEMENT I1	12	TL	73
86	102895	12.5L-15 SL	FARM IMPLEMENT I1	10	TT	73
87	102896	12.5L-15 SL	FARM IMPLEMENT I1	10	TL	73
88	102897	12.5L-15 SL	FARM IMPLEMENT I1	12	TL	73
89	103594	10.0/75-15.3	FARM IMPLEMENT AWI305	12	TL	74
90	103595	11.5/80-15.3	FARM IMPLEMENT AWI305	14	TL	74
91	105429	15/55-17	FARM IMPLEMENT 404	14	TL	75
92	105430	500/50-17	FARM IMPLEMENT 404	18	TL	75
93	104361	15.5/80-24	LIFT PRO	16	TL	79
94	100075	#12.5-18	MPT 602	12	TL	81
95	100076	#10.00-20	MPT 602	16	TT	81
96	100025	#12.5-20	MPT 602	12	TL	81
97	101638	405/70-20 (16.0/70-20)	MPT 602	14	TL	81
98	101639	405/70-24 (16.0/70-24)	MPT 602	14	TL	81
99	105402	405/70-20	MPT 800	14	TL	82
100	105401	405/70-24	MPT 800	14	TL	82
101	104857	10-16.5	LOADER PRO	10	TL	84
102	104858	12-16.5	LOADER PRO	12	TL	84
103	105378	14-17.5	LOADER PRO HD	14	TL	85
104	105379	15-19.5	LOADER PRO HD	14	TL	85
105	104855	10-16.5	GRIP X HD	10	TL	86
106	105233	10-16.5	GRIP X HD	12	TL	86
107	104856	12-16.5	GRIP X HD	12	TL	86
108	105131	12-16.5	GRIP X HD	14	TL	86

#Sizes are available only in Altura





CEAT SPECIALTY TIRES, INC.
525 N Tryon Street, Suite 1600, Charlotte NC 28202 USA.
Tel: +1 (704) 331-3928
Email: csti@ceat.com | Website: www.ceatspecialty.com/US